




Reliable
Flexible
Economical

alpha Basic Line & alpha Value Line Product catalog

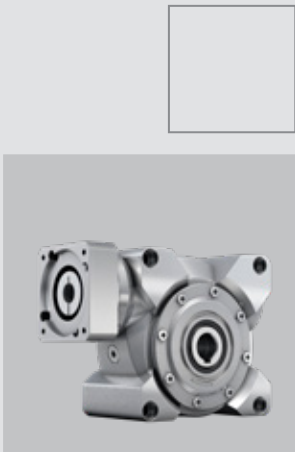

alpha Basic Line & alpha Value Line Product catalog

Reliable
Flexible
Economical

© 2020 by WITTENSTEIN alpha GmbH

All technical specifications were correct at the time of going to print. We are continually developing our products and therefore reserve the right to make modifications. This documentation is subject to occasional errors. Please appreciate that legal claims cannot be asserted as a result of incorrect specifications, illustrations or descriptions. The text, photos, technical drawings and any other illustrations printed in this publication are protected property of WITTENSTEIN alpha GmbH.

Further use of this material in printed or electronic format requires express approval from WITTENSTEIN alpha GmbH.

Any form of duplication, translation, editing, transfer to microfilm or storage on electronic systems is not permitted without express permission from WITTENSTEIN alpha GmbH.

Foreword by company management 06

WITTENSTEIN alpha 08

More than 30 years of innovation

alpha Basic Line & alpha Value Line 16

Product range and applications

alpha Basic Line planetary gearboxes 18

CP / CPS

alpha Basic Line bevel gearboxes 52

CPK / CPSK

alpha Basic Line worm gearboxes 86

CVH / CVS

alpha Value Line planetary gearboxes 104

NP / NPL / NPS / NPT / NPR

alpha Value Line bevel gearboxes 218

NPK / NPLK / NPSK / NPTK / NPRK

alpha Value Line worm gearboxes 296

NVH / NVS

Application-specific solutions 312

HDV

Product portfolio & company 322

Gearbox overview 322

Servo actuator overview 327

Value Linear Systems 328

premo – Servo actuators 329

Accessories 330

Services 332

WITTENSTEIN Group 336

Information 338

Sizing – Planetary / Bevel gearboxes 338

Sizing – Worm gearboxes 342

Glossary 344

Ordering code 350



Dear Business Associates,

Even though we are extremely passionate about technology and innovation, the success of our customers is our top priority. We have designed our products and services to help you achieve a competitive advantage – through consistently high quality, permanent availability, and the best service worldwide.

To ensure that you will find the right solution at WITTENSTEIN for your specific requirements, we have tailored our range of services to the needs of many different markets. Thus our series from “Basic” to “Premium” today cover a wide product range. Gearboxes of the alpha Basic and alpha Value Line are especially suitable for applications requiring cost-oriented yet efficient solutions. Both series are specially designed for axes with medium requirements for precision, dynamics, and power density, and precisely deliver the familiar alpha quality in this domain. They offer a unique modularity in this market segment. Thanks to additional output versions in combination with the angle sections provided by our portfolio, the alpha Basic and alpha Value Line provide every possible freedom when designing different applications.

Whatever solution you need, you are sure to reach your goal quickly and easily with us. Because we offer integrated mechanical and mechatronic drive solutions for all types of axis. On demand we also provide complete solutions from a single source – complete systems including servo actuators – also for linear systems. Our product range has grown significantly again, and yet we are continuing to develop new ideas to make your work easier.

Take our word for it!

Yours

Thomas Patzak und Norbert Pastoors
Managing Directors WITTENSTEIN alpha GmbH

YOUR WORLD IS OUR DRIVE. FOR MORE THAN 30 YEARS.



SP



LP



Linear systems



TPM+



High Performance
Linear System

1983

1994

1996

1999

2002

2004

2006

2007

2011

2013

TP



cymex®
sizing software



XP+ / TP+ / SP+ / LP+



TPK+ / SPK+ /
HG+ / SK+ / TK+



HDV
Hygiene Design





alpha Value Line



DP+ for Delta robots



INIRA



alpha Linear Systems



alpha Basic Line

2015

2016

2017

2018

cymex® 5

SIZING ASSISTANT

V-Drive Family

premo

CAD POINT





WITTENSTEIN alpha in all axes

Complete drive solutions under one roof

We offer the best solutions for almost every application. In addition to gear-boxes, our product portfolio includes a wide range of drive solutions with linear systems and servo actuators. Adapted accessories such as couplings and shrink discs round off the product portfolio.

Our products are divided into the Basic, Value, Advanced and Premium Segments in terms of “Performance” and “Value”. We want to make it even easier for our customers to find the right solution from our large portfolio for each specific application.

Overview of our product portfolio:

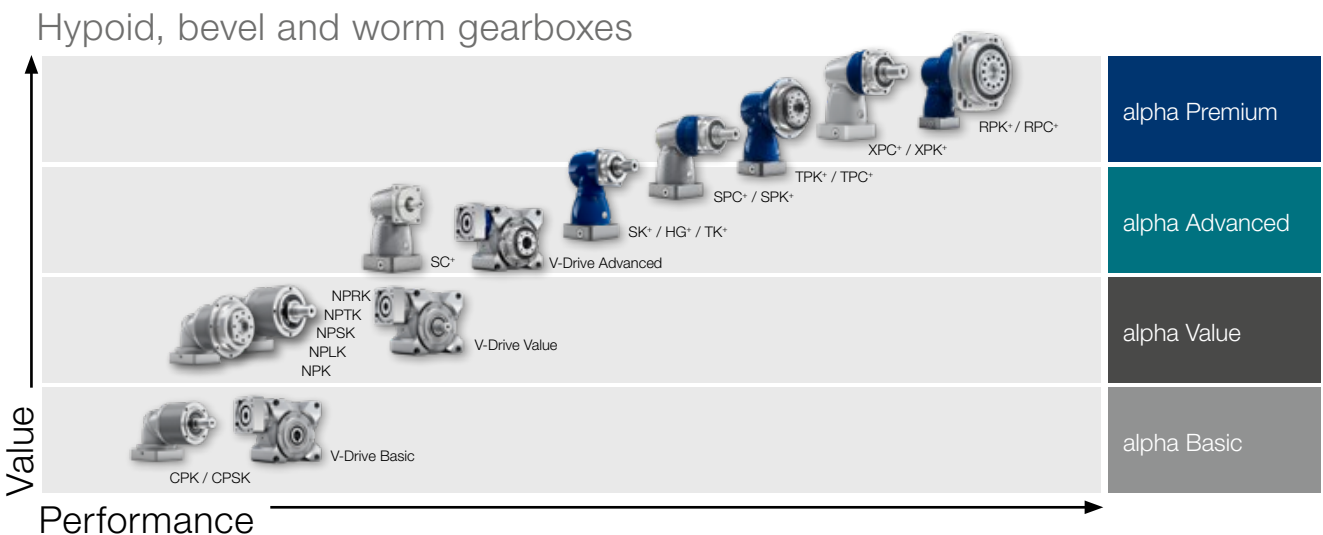
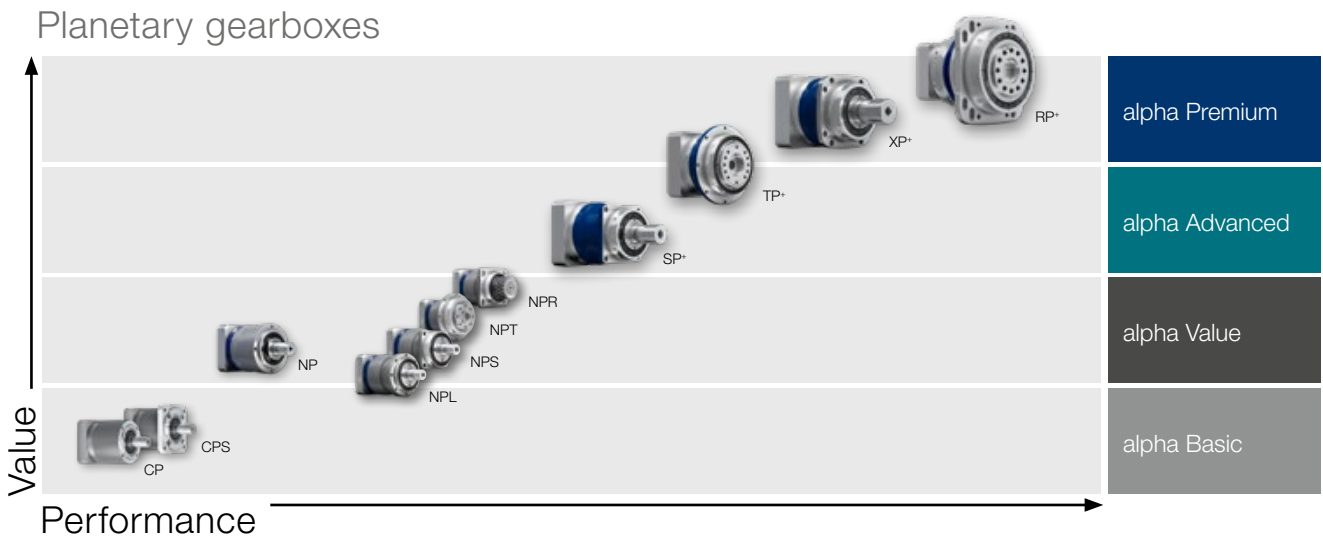


Know-how in every sector

Our solutions range from high-precision axes in manufacturing systems to packaging machines that must operate with maximum productivity in the smallest installation space.

Overview:

- Machine tools and production technology
- Food and packaging machines
- Wood working machinery
- Printing and paper machines
- Robotics and automation

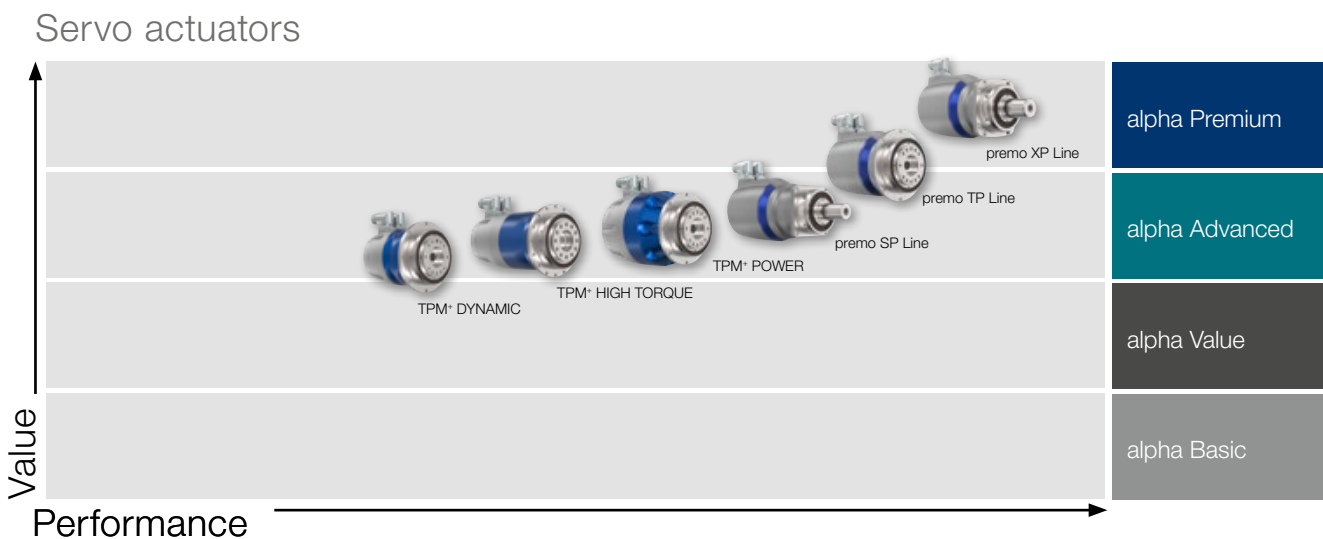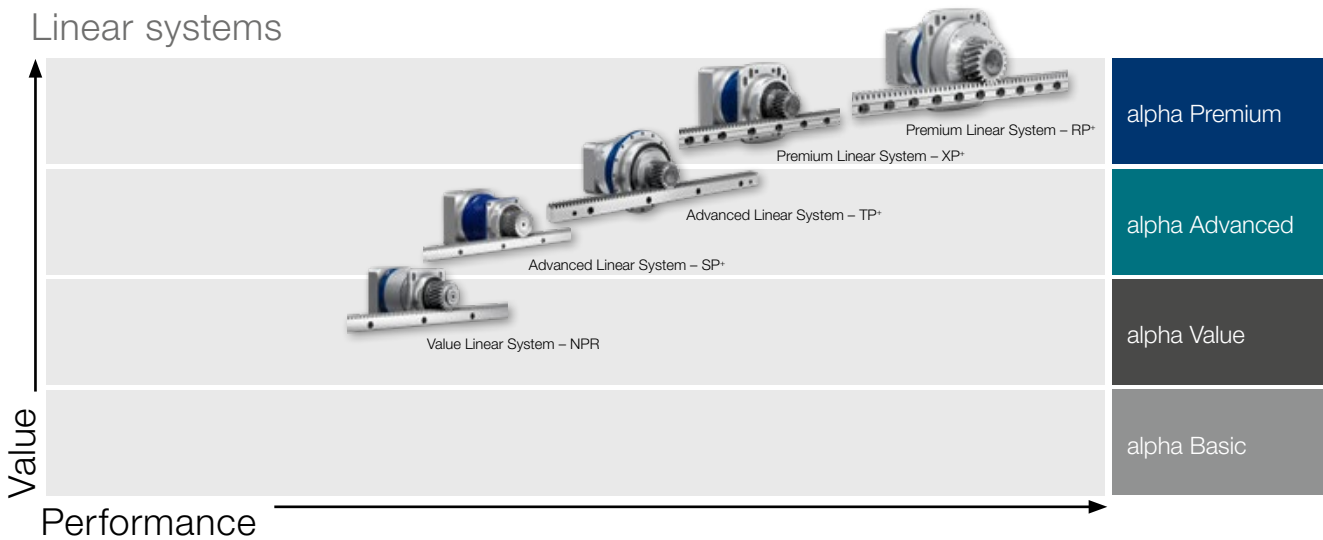

WITTENSTEIN alpha

Sizing Tools



Several ways to reach your objectives

Our software portfolio helps you choose the right drive

You can conveniently download dimension sheets and CAD data, select the best gearbox quickly and easily design complex kinematic sequences in detail – our software solutions offer various methods of selecting the best, most reliable drive on all axes.




CAD POINT

– Your Smart Catalog

- Performance data, dimension sheets and CAD data for all types of gearboxes
- Available online without logging in
- Comprehensive documentation of the selection

www.wittenstein-cad-point.com

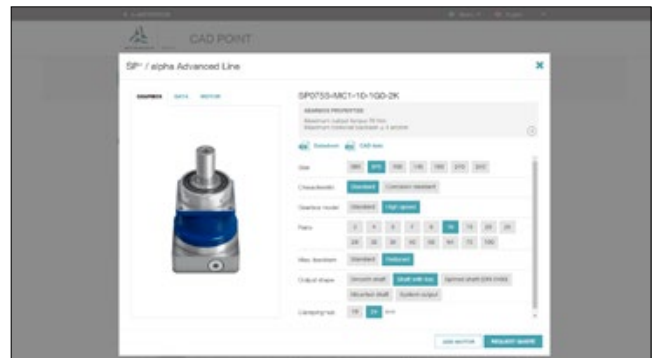


SIZING ASSISTANT

– Your Gearbox within Seconds

- Efficient gearbox selection in seconds
- Available online without logging in
- Access by specifying application or motor
- Information about price and delivery time
- Possibility of requesting quotation directly

www.sizing-assistant.com

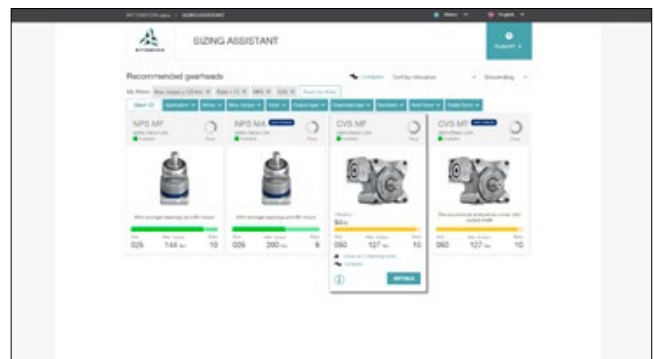

cymex®5

– Calculate on the Best

- Detailed calculation of complete drive trains
- Precise simulation of motion and load variables
- Downloadable software for complex designs

www.wittenstein-cymex.com



Efficient online design with the **SIZING ASSISTANT**


You want to find the optimum drive solution quickly and easily? Based on your application data or the desired motor, the SIZING ASSISTANT online tool suggests an appropriate gearbox from our WITTENSTEIN alpha product portfolio.

Available in 11 languages

The web-based app
SIZING ASSISTANT is available online
without login.



www.sizing-assistant.com

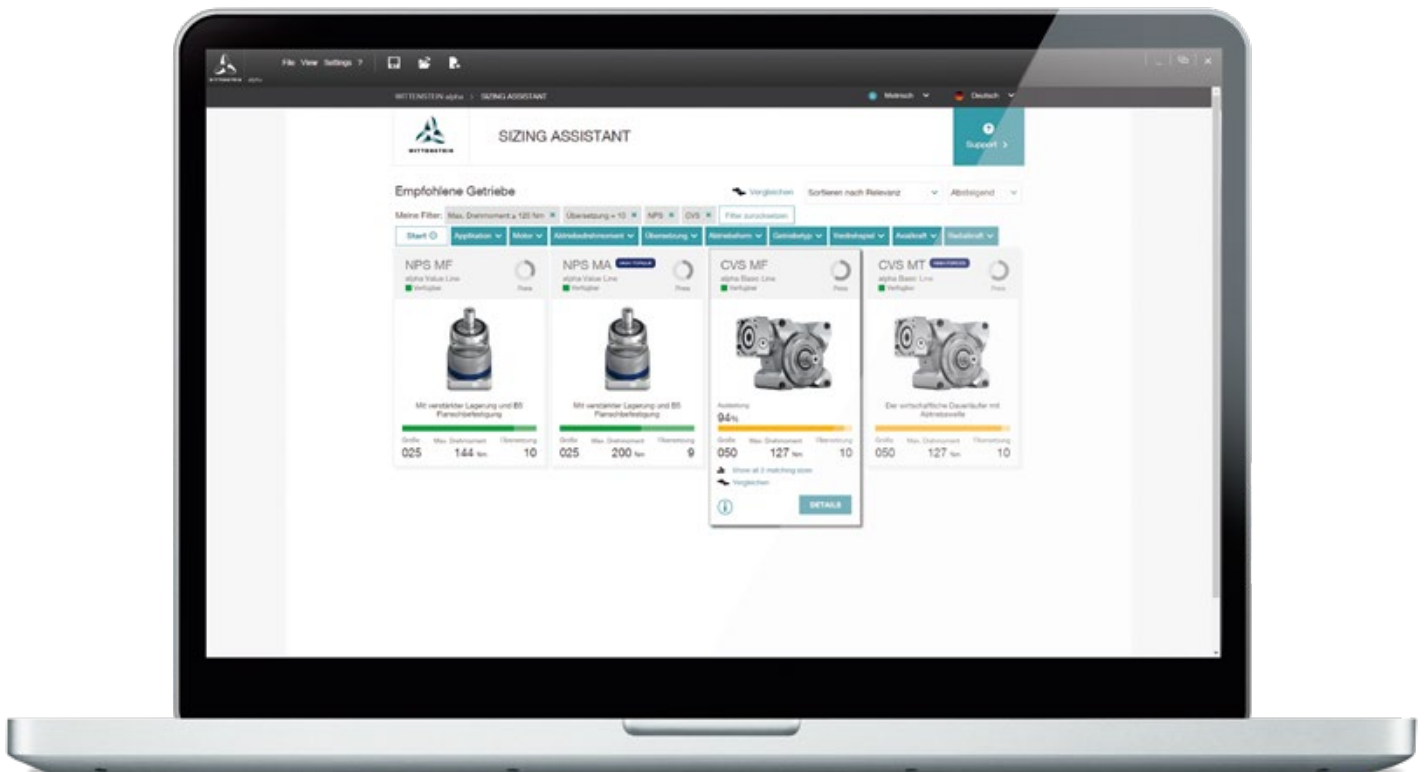

SIZING ASSISTANT


[illegible]

5 Baugrößen für NRP


	100	210	320	520	700
Nutbreite (mm)	100	210	320	520	700
Max. Drehmoment	18 Nm	37 Nm	128 Nm	320 Nm	524 Nm
Auslastung	48 %	24 %	8 %	4 %	2 %
Belastbarkeit	3	3	3	2	1
Lebensdauer	1	1	1	1	1
Max. Motorleistung	18 Nm	37 Nm	128 Nm	320 Nm	524 Nm
Max. Drehzahl	700 1/min	1050 1/min	1600 1/min	2000 1/min	2600 1/min
Leistung / Drehmoment	0,14 kg/cm²	0,14 kg/cm²	0,07 kg/cm²	0,04 kg/cm²	0,04 kg/cm²
Maximale Drehmoment	0,14 kg	0,07 kg	0,07 kg	0,04 kg	0,04 kg
Leistung	Standard 0,10 mm/min	Standard 0,10 mm/min	Standard 0,10 mm/min	Standard 0,10 mm/min	Standard 0,10 mm/min
Verfügbare	Standard 0,10 mm/min	Standard 0,10 mm/min	Standard 0,10 mm/min	Standard 0,10 mm/min	Standard 0,10 mm/min

DETAILS

[NUTSCHNITTZEICHEN](#)

[illegible]


The "Compare" button enables you to compare different gearbox variants or sizes on the basis of over 20 characteristics. Fast selection, clear visualization, custom variation and comparison options, direct document retrieval: the SIZING ASSISTANT helps users to find the perfect gearbox in the right size without any complications.

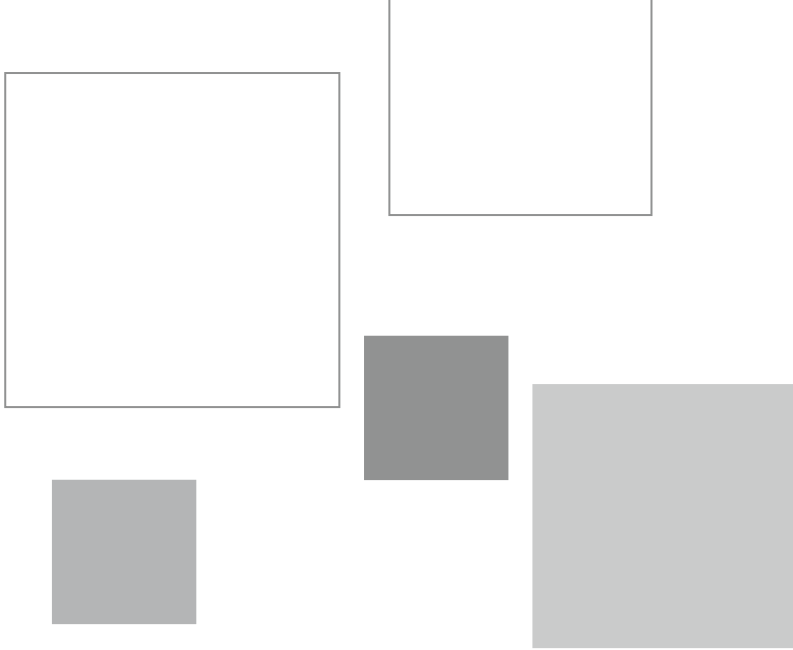


alpha Basic Line

Geared up to Fit

The gearboxes of the alpha Basic Line live up to the motto “Geared up to Fit”. The CP, CPS, CPK, and CPSK planetary and bevel gearboxes as well as the CVS and CVH worm gearboxes combine high flexibility on the drive side with optimum economy. In conjunction with backlash less than or equal to 12 arcmin, the gearboxes are the perfect choice in machines with medium to low requirements for positioning accuracy.

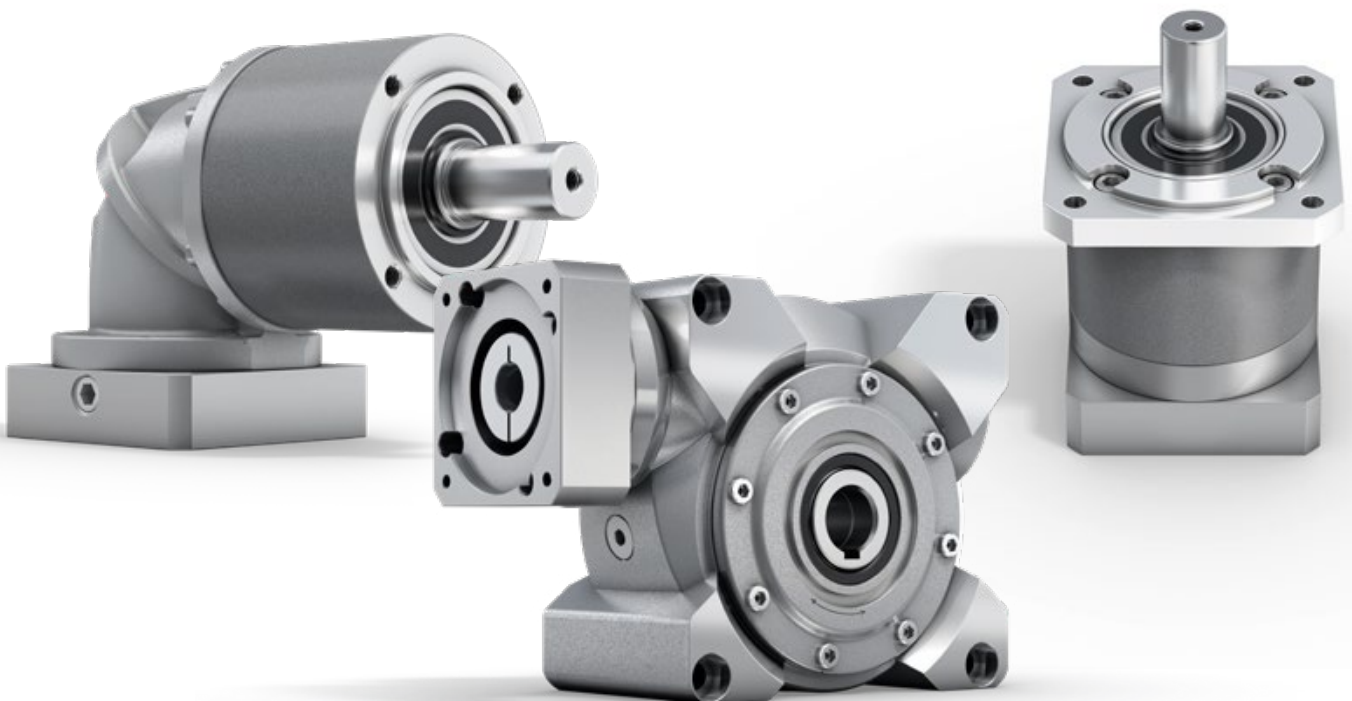


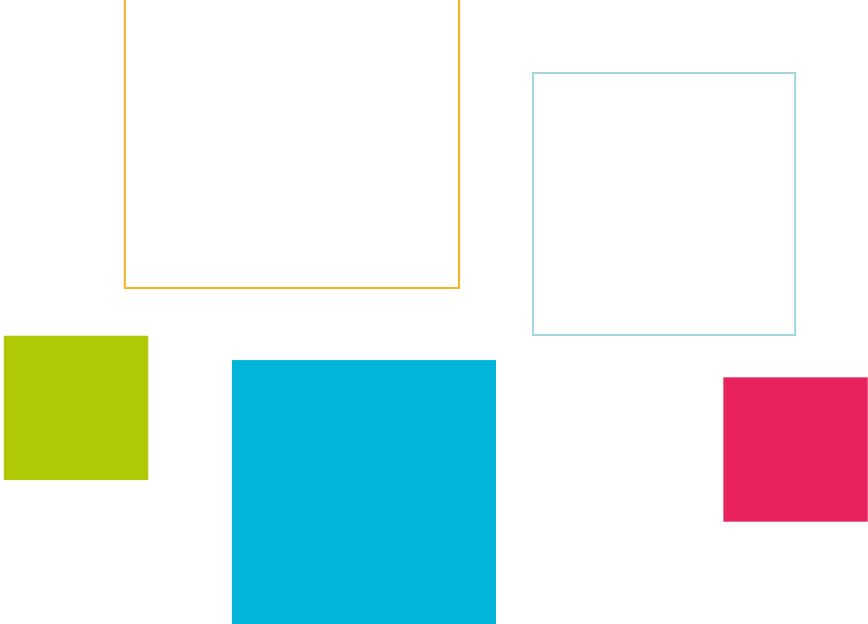

alpha Value Line

Individual Talents


The alpha Value Line impresses with economical and flexible solutions with backlash less than or equal to 8 arcmin. For example, the planetary and bevel gearboxes of the NP and NPK series as well as the NVS and NVH worm gearboxes are suitable for a wide range of applications thanks to numerous ratios and output versions – our “Individual Talents” give you new design freedom!

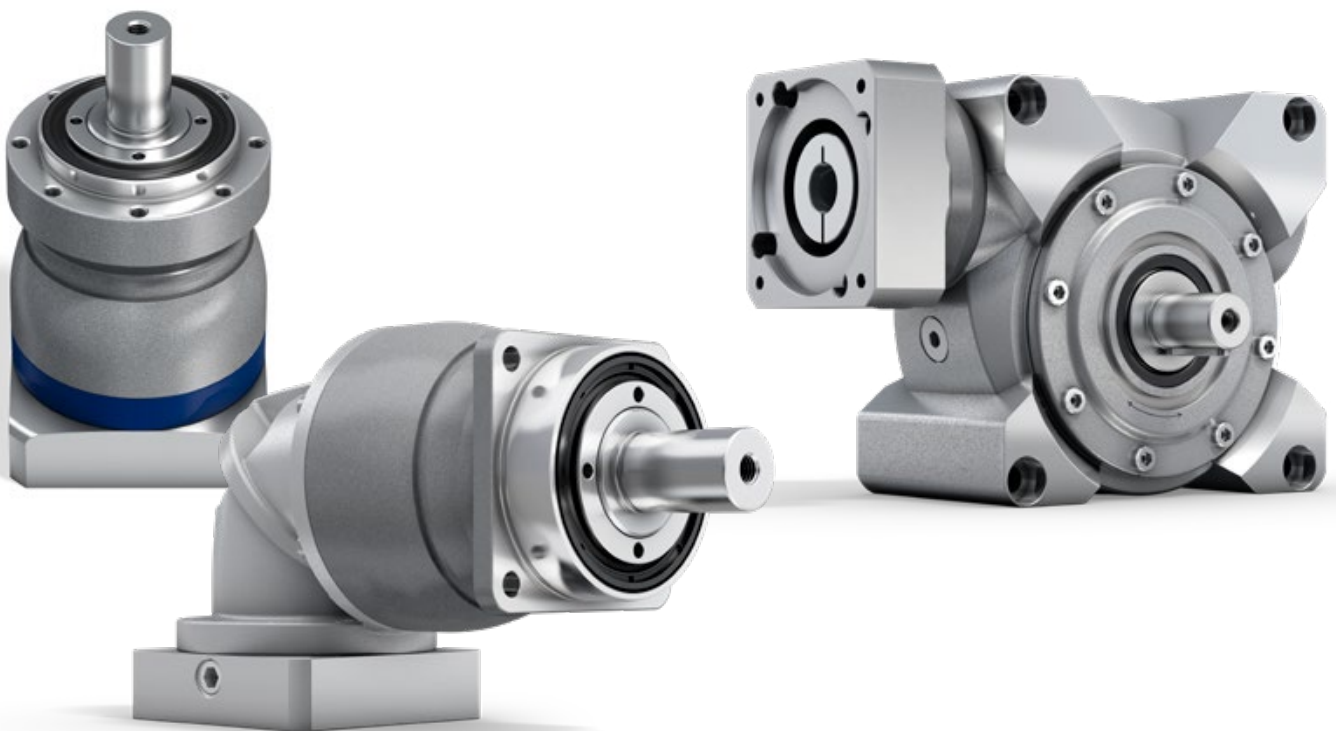

alpha Basic Line

PLANETARY GEARBOXES CP / CPS

The planetary gearboxes of the alpha Basic Line are the ideal choice for cost-oriented solutions. These gearboxes further increase design freedom in machines due to new additional output variants as well as five different sizes.

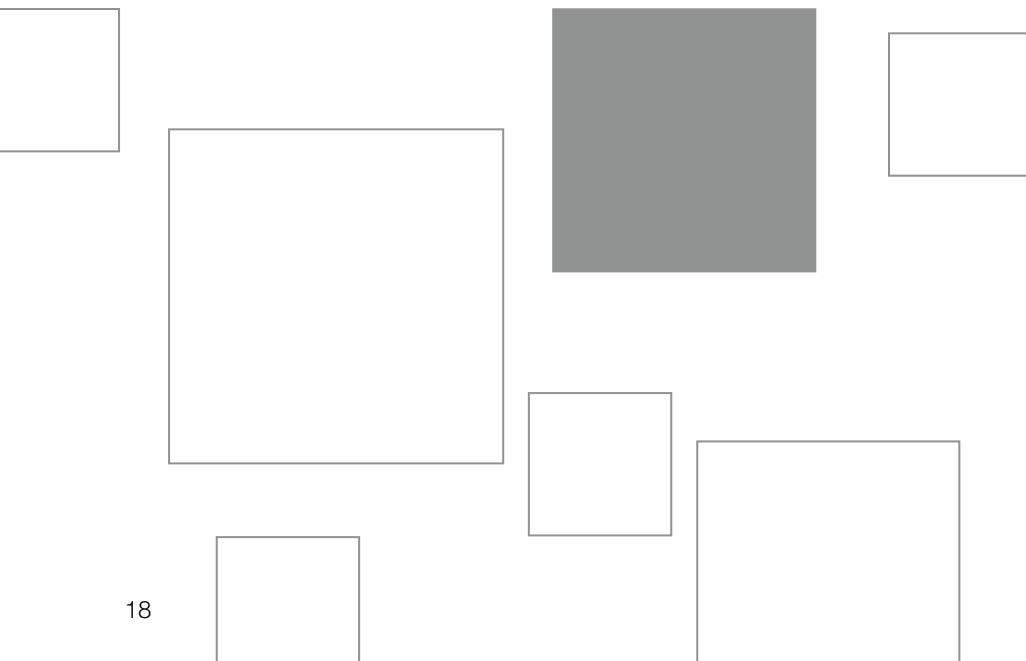



* CPS with replaceable B5 output flange


CP / CPS – Geared up to Fit

CP



Tailored to applications in the mid-range and economy segment with low to medium requirements for positioning accuracy, the CP and CPS planetary gearboxes do not fail to impress. The key benefits offered by the gearboxes are high flexibility combined with maximum efficiency.

PRODUCT HIGHLIGHTS



High flexibility

Different output variants offer design freedom tailored to individual requirements. The flexibility on the input side also enables the realization of different motor mounting versions.



Maximum economy

The gearboxes of the alpha Basic Line are extremely economical to purchase and highly efficient in operation.



Fast sizing


Efficient online sizing within seconds in the SIZING ASSISTANT on the basis of the application data or the motor.



CPS – planetary gearbox with replaceable B5 output flange



CPS – planetary gearbox with long centering

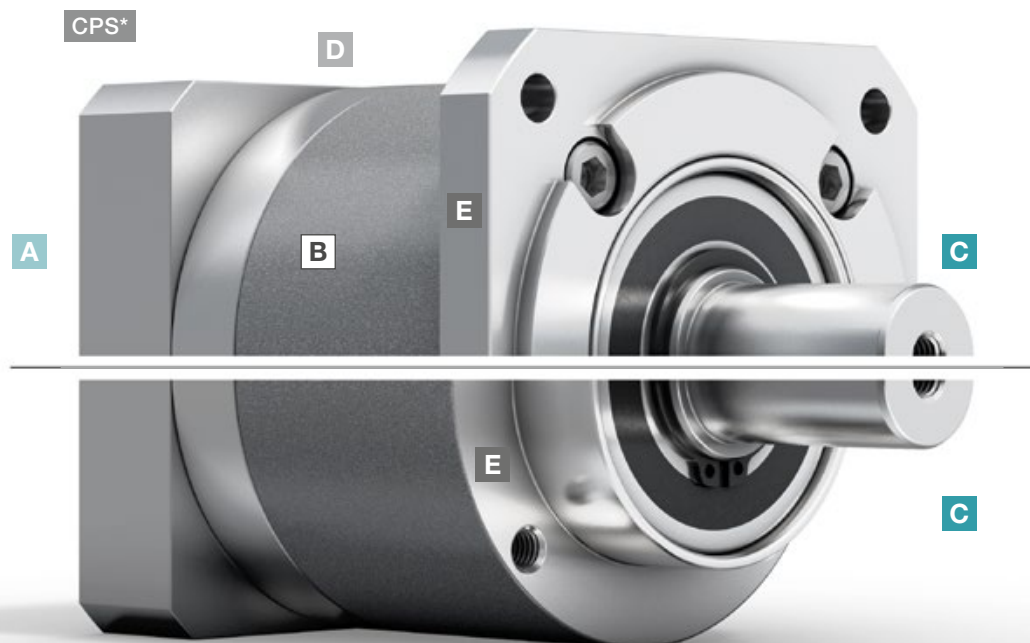

CPS

* CPS with replaceable B5 output flange

A

Flexible motor connection

- Mounting of all common servo motors by means of a flexible and screw-fastened adapter plate
- Large number of motor shaft diameters connectable

B

High ratio variation

- Large number of ratios ($i=3$ to $i=100$)
- Available in the common binary ratios

C

Various output shapes

- With smooth shaft as well as shaft with key

D

Variety of sizes

- CP available in five different sizes (005 – 045)
- CPS available in three different sizes (015 – 035)

E

Variable application connection

- Reduced installation space and maximum compactness thanks to a long centering
- Flange attachment for B5 mounting



CPS – planetary gearbox with elastomer coupling



SIZING ASSISTANT
YOUR GEARBOX WITHIN SECONDS

Efficient gearbox sizing within seconds – online without login
www.sizing-assistant.com

CP 005 MF 1-stage

				1-stage					
Ratio		i		4	5	7	8	10	
Max. torque ^{a) b) e)}		T_{2a}	Nm	17	21	21	20	20	
			in.lb	150	186	186	177	177	
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)		T_{2B}	Nm	11	14	14	13	13	
			in.lb	97	124	124	115	115	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)		T_{2Not}	Nm	26	26	26	26	26	
			in.lb	230	230	230	230	230	
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)		n_{1N}	rpm	3800	3800	4300	4300	4300	
Max. input speed		n_{1Max}	rpm	9000	9000	9000	9000	9000	
Mean no load running torque ^{b)} (at n_1 =3000 rpm and 20 °C gearbox temperature)		T_{012}	Nm	0.07	0.06	0.06	0.06	0.05	
			in.lb	0.62	0.53	0.53	0.53	0.44	
Max. backlash		j_t	arcmin	≤ 12					
Torsional rigidity ^{b)}		C_{21}	Nm/arcmin	0.58	0.58	0.58	0.52	0.52	
			in.lb/arcmin	5.1	5.1	5.1	4.6	4.6	
Max. axial force ^{c)}		F_{2AMax}	N	240					
			lb _f	54					
Max. lateral force ^{c) f)}		F_{2QMax}	N	170					
			lb _f	38					
Max. tilting moment		M_{2KMax}	Nm	4					
			in.lb	35					
Efficiency at full load		η	%	97					
Service life		L_h	h	> 20000					
Weight (incl. standard adapter plate)		m	kg	0.5					
			lb _m	1.1					
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)		L_{PA}	dB(A)	≤ 59					
Max. permitted housing temperature			°C	+90					
			°F	+194					
Ambient temperature			°C	–15 to +40					
			°F	+5 to +104					
Lubrication				Lubricated for life					
Direction of rotation				In- and output same direction					
Protection class				IP 64					
Elastomer coupling (recommended product type – validate sizing with cymex®)				ELC-0005BA010.000-X					
Bore diameter of coupling on the application side			mm	X = 004.000 - 012.700					
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	B	11	J_1	kgcm ²	0.04	0.04	0.04	0.03	0.03
				10 ⁻³ in.lb.s ²	0.04	0.04	0.04	0.03	0.03

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Valid for: Smooth shaft

^{f)} At increased lateral forces – see glossary

Motor shaft diameter [mm]

1-stage


up to 11⁴⁾ (B)⁵⁾
clamping hub
diameter

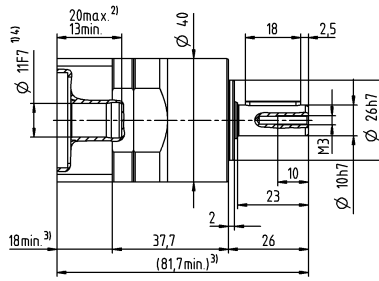

Planetary Gearboxes
Basic Line

Other output variants

Smooth shaft



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated

by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

CP 005 MF 2-stage

			2-stage								
Ratio	i		16	20	25	28	35	40	50	70	100
Max. torque ^{a) b) e)}	T_{2a}	Nm	17	17	21	17	21	17	21	21	20
		in.lb	150	150	186	150	186	150	186	186	177
Max. acceleration torque ^{b)} (max. 1000 cycles per hour)	T_{2B}	Nm	11	11	14	11	14	11	14	14	13
		in.lb	97	97	124	97	124	97	124	124	115
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	26	26	26	26	26	26	26	26	26
		in.lb	230	230	230	230	230	230	230	230	230
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)	n_{1N}	rpm	3800	3800	3800	3800	4300	4300	4300	4300	4300
Max. input speed	n_{1Max}	rpm	9000	9000	9000	9000	9000	9000	9000	9000	9000
Mean no load running torque ^{b)} (at $n_1=3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	0.09	0.08	0.08	0.08	0.07	0.07	0.07	0.06	0.06
		in.lb	0.8	0.71	0.71	0.71	0.62	0.62	0.62	0.53	0.53
Max. backlash	j_t	arcmin	≤ 18								
Torsional rigidity ^{b)}	C_{t21}	Nm/arcmin	0.58	0.58	0.58	0.58	0.58	0.58	0.58	0.58	0.52
		in.lb/arcmin	5.1	5.1	5.1	5.1	5.1	5.1	5.1	5.1	4.6
Max. axial force ^{c)}	F_{2AMax}	N	240								
		lb _f	54								
Max. lateral force ^{c) f)}	F_{2QMMax}	N	170								
		lb _f	38								
Max. tilting moment	M_{2KMax}	Nm	4								
		in.lb	35								
Efficiency at full load	η	%	95								
Service life	L_h	h	> 20000								
Weight (incl. standard adapter plate)	m	kg	0.7								
		lb _m	1.5								
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 59								
Max. permitted housing temperature		°C	+90								
		°F	+194								
Ambient temperature		°C	-15 to +40								
		°F	+5 to +104								
Lubrication			Lubricated for life								
Direction of rotation			In- and output same direction								
Protection class			IP 64								
Elastomer coupling (recommended product type – validate sizing with cymex®) Bore diameter of coupling on the application side			ELC-0005BA010.000-X								
		mm	X = 004.000 - 012.700								
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	B 11	J_t	kgcm ²	0.04	0.04	0.04	0.04	0.04	0.04	0.03	0.03
			10 ⁻³ in.lb.s ²	0.04	0.04	0.04	0.04	0.04	0.04	0.03	0.03

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Valid for: Smooth shaft

^{f)} At increased lateral forces – see glossary

Motor shaft diameter [mm]

2-stage


up to 11⁴⁾ (B)⁵⁾
clamping hub
diameter

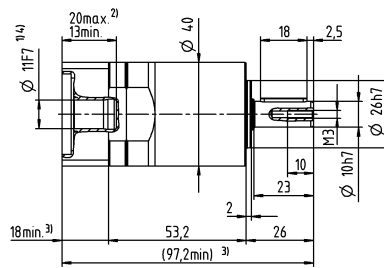

Planetary Gearboxes
Basic Line

Other output variants

Smooth shaft



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated

by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

CP 015 MF 1-stage

				1-stage						
Ratio		i		3	4	5	7	8	10	
Max. torque ^{a) b) e)}		T_{2a}	Nm	48	56	58	58	56	56	
			in.lb	425	496	513	513	496	496	
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)		T_{2B}	Nm	30	35	40	40	35	35	
			in.lb	266	310	354	354	310	310	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)		T_{2Not}	Nm	75	75	75	75	75	75	
			in.lb	664	664	664	664	664	664	
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)		n_{1N}	rpm	3300	3300	3300	4000	4000	4000	
Max. input speed		n_{1Max}	rpm	7000	7000	7000	7000	7000	7000	
Mean no load running torque ^{b)} (at n_1 =3000 rpm and 20 °C gearbox temperature)		T_{012}	Nm	0.25	0.2	0.17	0.15	0.14	0.13	
			in.lb	2.2	1.8	1.5	1.3	1.2	1.2	
Max. backlash		j_t	arcmin	≤ 12						
Torsional rigidity ^{b)}		C_{t21}	Nm/arcmin	2.1	2.1	2.1	2.1	1.9	1.9	
			in.lb/arcmin	19	19	19	19	17	17	
Max. axial force ^{c)}		F_{2AMax}	N	750						
			lb _f	169						
Max. lateral force ^{c) f)}		F_{2QMax}	N	500						
			lb _f	113						
Max. tilting moment		M_{2KMax}	Nm	17						
			in.lb	150						
Efficiency at full load		η	%	97						
Service life		L_h	h	> 20000						
Weight (incl. standard adapter plate)		m	kg	1.4						
			lb _m	3.1						
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)		L_{PA}	dB(A)	≤ 60						
Max. permitted housing temperature			°C	+90						
			°F	+194						
Ambient temperature			°C	–15 to +40						
			°F	+5 to +104						
Lubrication				Lubricated for life						
Direction of rotation				In- and output same direction						
Protection class				IP 64						
Elastomer coupling (recommended product type – validate sizing with cymex®)				ELC-0020BA014.000-X						
Bore diameter of coupling on the application side			mm	X = 008.000 - 025.000						
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	C	14	J_1	kgcm ²	0.23	0.2	0.18	0.15	0.15	0.15
				10 ⁻³ in.lb.s ²	0.2	0.18	0.16	0.13	0.13	0.13
	E	19	J_1	kgcm ²	0.43	0.4	0.39	0.38	0.38	0.37
				10 ⁻³ in.lb.s ²	0.38	0.35	0.35	0.34	0.34	0.33

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft







^{f)} At increased lateral forces – see glossary

1-stage

up to 14⁴⁾ (C)⁵⁾
clamping hub
diameter

Motor shaft diameter [mm]


up to 19⁴⁾ (E)
clamping hub
diameter

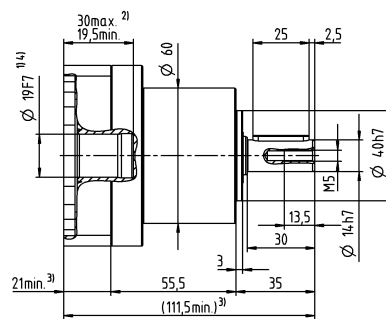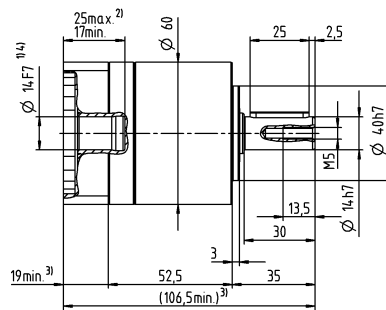

Planetary Gearboxes
Basic Line

Other output variants

Smooth shaft



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

CP 015 MF 2-stage

			2-stage														
Ratio	i		9	12	15	16	20	25	28	30	35	40	50	70	100		
Max. torque ^{a) b) e)}	T_{2a}	Nm	48	48	48	56	56	58	56	48	58	56	58	58	56		
		$in.lb$	425	425	425	496	496	513	496	425	513	496	513	513	496		
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}	Nm	30	30	30	35	35	40	35	30	40	35	40	40	35		
		$in.lb$	266	266	266	310	310	354	310	266	354	310	354	354	310		
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	75	75	75	75	75	75	75	75	75	75	75	75	75		
		$in.lb$	664	664	664	664	664	664	664	664	664	664	664	664	664		
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)	n_{1N}	rpm	3300	3300	3300	3300	3300	3300	3300	3300	3300	3300	3300	4000	4000		
Max. input speed	n_{1Max}	rpm	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000		
Mean no load running torque ^{b)} (at n_1 =3000 rpm and 20 °C gearbox temperature)	T_{012}	Nm	0.33	0.28	0.26	0.25	0.22	0.21	0.2	0.21	0.18	0.17	0.16	0.15	0.14		
		$in.lb$	2.9	2.5	2.3	2.2	1.9	1.9	1.8	1.9	1.6	1.5	1.4	1.3	1.2		
Max. backlash	j_t	$arcmin$	≤ 15														
Torsional rigidity ^{b)}	C_{121}	$Nm/arcmin$	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	1.9		
		$in.lb/arcmin$	19	19	19	19	19	19	19	19	19	19	19	19	17		
Max. axial force ^{c)}	F_{2AMax}	N	750														
		lb_f	169														
Max. lateral force ^{c) f)}	F_{2QMax}	N	500														
		lb_f	113														
Max. tilting moment	M_{2KMMax}	Nm	17														
		$in.lb$	150														
Efficiency at full load	η	%	95														
Service life	L_h	h	> 20000														
Weight (incl. standard adapter plate)	m	kg	1.8														
		lb_m	4														
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	$dB(A)$	≤ 60														
Max. permitted housing temperature		°C	+90														
		°F	+194														
Ambient temperature		°C	–15 to +40														
		°F	+5 to +104														
Lubrication			Lubricated for life														
Direction of rotation			In- and output same direction														
Protection class			IP 64														
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0020BA014.000-X														
Bore diameter of coupling on the application side		mm	X = 008.000 - 025.000														
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	C	14	J_1	$kgcm^2$	0.22	0.22	0.21	0.2	0.19	0.18	0.17	0.19	0.16	0.17	0.16	0.15	0.15
				$10^{-3} in.lb.s^2$	0.19	0.19	0.19	0.18	0.17	0.16	0.15	0.17	0.14	0.15	0.14	0.13	0.13
	E	19	J_1	$kgcm^2$	0.43	0.42	0.42	0.4	0.4	0.39	0.39	0.41	0.39	0.39	0.38	0.38	0.37
				$10^{-3} in.lb.s^2$	0.38	0.37	0.37	0.35	0.35	0.35	0.35	0.36	0.35	0.35	0.34	0.34	0.33

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange




^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft

^{f)} At increased lateral forces – see glossary

2-stage




up to 14⁴⁾ (C)⁵⁾
clamping hub
diameter

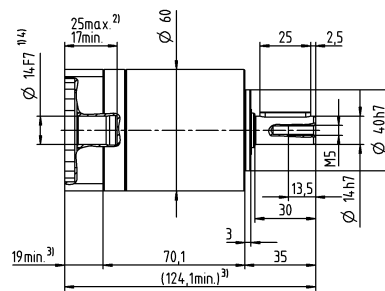

Planetary Gearboxes
Basic Line


Motor shaft diameter [mm]

up to 19⁴⁾ (E)
clamping hub
diameter

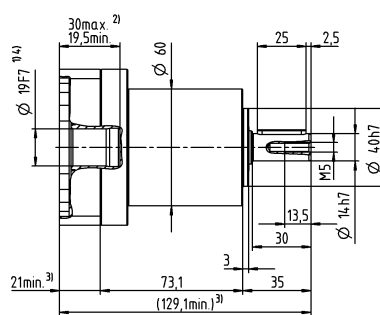

Other output variants

Smooth shaft



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

CP 025 MF 1-stage

				1-stage						
Ratio		i		3	4	5	7	8	10	
Max. torque ^{a) b) e)}		T_{2a}	Nm	112	150	150	150	144	144	
			in.lb	991	1328	1328	1328	1275	1275	
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)		T_{2B}	Nm	70	95	100	100	90	90	
			in.lb	620	841	885	885	797	797	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)		T_{2Not}	Nm	114	152	187	187	187	187	
			in.lb	1009	1345	1655	1655	1655	1655	
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)		n_{1N}	rpm	3100	3100	3100	3600	3600	3600	
Max. input speed		n_{1Max}	rpm	7000	7000	7000	7000	7000	7000	
Mean no load running torque ^{b)} (at n_1 =3000 rpm and 20 °C gearbox temperature)		T_{012}	Nm	0.38	0.3	0.26	0.23	0.21	0.19	
			in.lb	3.4	2.7	2.3	2	1.9	1.7	
Max. backlash		j_t	arcmin	≤ 12						
Torsional rigidity ^{b)}		C_{t21}	Nm/arcmin	6.1	6.1	6.1	6.1	5.5	5.5	
			in.lb/arcmin	54	54	54	54	49	49	
Max. axial force ^{c)}		F_{2AMax}	N	1600						
			lb _f	360						
Max. lateral force ^{c)}		F_{2QMMax}	N	1200						
			lb _f	270						
Max. tilting moment		M_{2KMMax}	Nm	54						
			in.lb	478						
Efficiency at full load		η	%	97						
Service life		L_h	h	> 20000						
Weight (incl. standard adapter plate)		m	kg	2.9						
			lb _m	6.4						
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)		L_{PA}	dB(A)	≤ 62						
Max. permitted housing temperature			°C	+90						
			°F	+194						
Ambient temperature			°C	–15 to +40						
			°F	+5 to +104						
Lubrication				Lubricated for life						
Direction of rotation				In- and output same direction						
Protection class				IP 64						
Elastomer coupling (recommended product type – validate sizing with cymex®)				ELC-0060BA020.000-X						
Bore diameter of coupling on the application side			mm	X = 012.000 - 032.000						
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	E	19	J_1	kgcm ²	0.66	0.53	0.48	0.43	0.41	0.4
				10 ⁻³ in.lb.s ²	0.58	0.47	0.42	0.38	0.36	0.35
	G	24	J_1	kgcm ²	1.5	1.4	1.3	1.3	1.3	1.3
				10 ⁻³ in.lb.s ²	1.3	1.2	1.2	1.2	1.2	1.2

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft




1-stage

up to 19⁴⁾ (E)⁵⁾
clamping hub
diameter

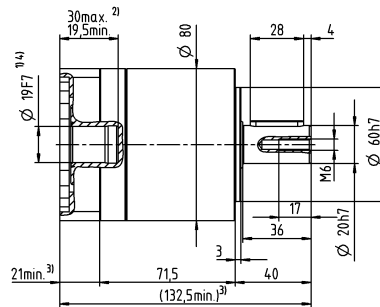

Planetary Gearboxes
Basic Line


up to 24⁴⁾ (G)
clamping hub
diameter

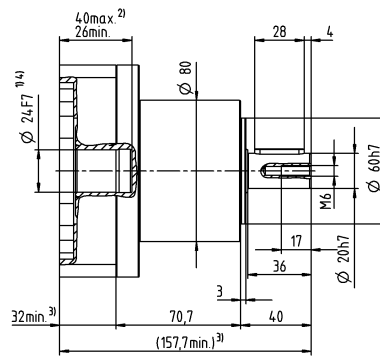

Motor shaft diameter [mm]

Other output variants

Smooth shaft



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

CP 025 MF 2-stage

				2-stage													
Ratio		i		9	12	15	16	20	25	28	30	35	40	50	70	100	
Max. torque ^{a) b) e)}		T_{2a}	Nm	112	112	112	150	150	150	150	112	150	150	150	150	144	
			$in.lb$	991	991	991	1328	1328	1328	1328	991	1328	1328	1328	1328	1275	
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)		T_{2B}	Nm	70	70	70	95	95	95	95	70	100	95	100	100	90	
			$in.lb$	620	620	620	841	841	841	841	620	885	841	885	885	797	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)		T_{2Not}	Nm	187	187	187	187	187	187	187	187	187	187	187	187	187	
			$in.lb$	1655	1655	1655	1655	1655	1655	1655	1655	1655	1655	1655	1655	1655	
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)		n_{1N}	rpm	3100	3100	3100	3100	3100	3100	3100	3100	3100	3100	3100	3600	3600	
Max. input speed		n_{1Max}	rpm	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	
Mean no load running torque ^{b)} (at n_1 =3000 rpm and 20 °C gearbox temperature)		T_{012}	Nm	0.5	0.43	0.39	0.38	0.34	0.32	0.3	0.31	0.28	0.26	0.24	0.22	0.21	
			$in.lb$	4.4	3.8	3.5	3.4	3	2.8	2.7	2.7	2.5	2.3	2.1	1.9	1.9	
Max. backlash		j_t	$arcmin$	≤ 15													
Torsional rigidity ^{b)}		C_{t21}	$Nm/arcmin$	6.1	6.1	6.1	6.1	6.1	6.1	6.1	6.1	6.1	6.1	6.1	6.1	5.5	
			$in.lb/arcmin$	54	54	54	54	54	54	54	54	54	54	54	54	49	
Max. axial force ^{c)}		F_{2AMax}	N	1600													
			lb_f	360													
Max. lateral force ^{c)}		F_{2QMMax}	N	1200													
			lb_f	270													
Max. tilting moment		M_{2KMMax}	Nm	54													
			$in.lb$	478													
Efficiency at full load		η	%	95													
Service life		L_h	h	> 20000													
Weight (incl. standard adapter plate)		m	kg	3.7													
			lb_m	8.2													
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)		L_{PA}	$dB(A)$	≤ 62													
Max. permitted housing temperature			°C	+90													
			°F	+194													
Ambient temperature			°C	–15 to +40													
			°F	+5 to +104													
Lubrication				Lubricated for life													
Direction of rotation				In- and output same direction													
Protection class				IP 64													
Elastomer coupling (recommended product type – validate sizing with cymex®)				ELC-0060BA020.000-X													
Bore diameter of coupling on the application side			mm	X = 012.000 - 032.000													
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	E	19	J_1	$kgcm^2$	0.66	1.4	1.6	0.98	1.1	0.82	1.2	2.1	0.88	1.4	1	0.71	0.54
				$10^{-3} in.lb.s^2$	0.58	1.2	1.4	0.87	0.97	0.73	1.1	1.9	0.78	1.2	0.89	0.63	0.48
	G	24	J_1	$kgcm^2$	1.5	2.3	2.4	1.8	1.9	1.7	2	3	1.7	2.2	1.9	1.6	1.4
				$10^{-3} in.lb.s^2$	1.3	2	2.1	1.6	1.7	1.5	1.8	2.7	1.5	1.9	1.7	1.4	1.2

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft

2-stage




up to 19⁴⁾ (E)⁵⁾
clamping hub
diameter

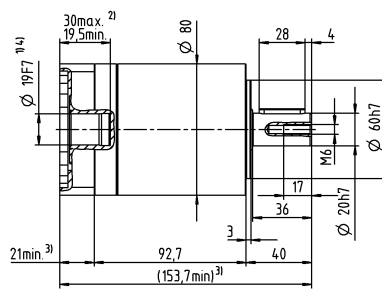

Planetary Gearboxes
Basic Line


Motor shaft diameter [mm]

up to 24⁴⁾ (G)
clamping hub
diameter

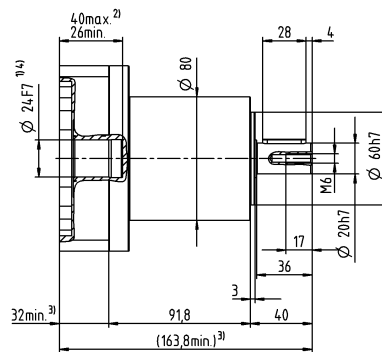

Other output variants

Smooth shaft



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

CP 035 MF 1-stage

			1-stage							
Ratio		i		3	4	5	7	8	10	
Max. torque ^{a) b) e)}		T_{2a}	Nm	272	272	272	272	272	272	
			in.lb	2407	2407	2407	2407	2407	2407	
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)		T_{2B}	Nm	175	255	250	250	220	220	
			in.lb	1549	2257	2213	2213	1947	1947	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)		T_{2Not}	Nm	460	480	480	480	470	480	
			in.lb	4071	4248	4248	4248	4160	4248	
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)		n_{1N}	rpm	2300	2300	2300	2800	2800	2800	
Max. input speed		n_{1Max}	rpm	5500	5500	5500	5500	5500	5500	
Mean no load running torque ^{b)} (at n_1 =3000 rpm and 20 °C gearbox temperature)		T_{012}	Nm	0.95	0.76	0.66	0.57	0.52	0.48	
			in.lb	8.4	6.7	5.8	5	4.6	4.2	
Max. backlash		j_t	arcmin	≤ 12						
Torsional rigidity ^{b)}		C_{t21}	Nm/arcmin	16	16	16	16	14	14	
			in.lb/arcmin	142	142	142	142	124	124	
Max. axial force ^{c)}		F_{2AMax}	N	2500						
			lb _f	563						
Max. lateral force ^{c)}		F_{2QMax}	N	1750						
			lb _f	394						
Max. tilting moment		M_{2KMax}	Nm	98						
			in.lb	867						
Efficiency at full load		η	%	97						
Service life		L_h	h	> 20000						
Weight (incl. standard adapter plate)		m	kg	7.5						
			lb _m	17						
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)		L_{PA}	dB(A)	≤ 66						
Max. permitted housing temperature			°C	+90						
			°F	+194						
Ambient temperature			°C	–15 to +40						
			°F	+5 to +104						
Lubrication				Lubricated for life						
Direction of rotation				In- and output same direction						
Protection class				IP 64						
Elastomer coupling (recommended product type – validate sizing with cymex®)				ELC-0150BA025.000-X						
Bore diameter of coupling on the application side			mm	X = 019.000 - 036.000						
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	G	24	J_1	kgcm ²	2.6	1.9	1.7	1.5	1.4	1.4
				10 ⁻³ in.lb.s ²	2.3	1.7	1.5	1.3	1.2	1.2
	K	38	J_1	kgcm ²	7.8	7.1	6.9	6.7	6.6	6.5
				10 ⁻³ in.lb.s ²	6.9	6.3	6.1	5.9	5.8	5.8

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft




1-stage

up to 24⁴⁾ (G)⁵⁾
clamping hub
diameter

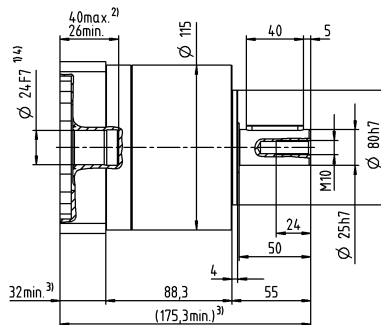

Planetary Gearboxes
Basic Line


up to 38⁴⁾ (K)
clamping hub
diameter

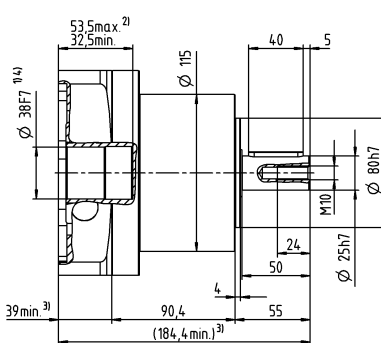

Motor shaft diameter [mm]

Other output variants

Smooth shaft



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

CP 035 MF 2-stage

				2-stage													
Ratio		i		9	12	15	16	20	25	28	30	35	40	50	70	100	
Max. torque ^{a) b) e)}		T_{2a}	<i>Nm</i>	272	272	272	272	272	272	272	272	272	272	272	272	272	
			<i>in.lb</i>	2407	2407	2407	2407	2407	2407	2407	2407	2407	2407	2407	2407	2407	2407
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)		T_{2B}	<i>Nm</i>	175	175	175	255	255	250	255	175	250	255	250	250	220	
			<i>in.lb</i>	1549	1549	1549	2257	2257	2213	2257	1549	2213	2257	2213	2213	1947	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)		T_{2Not}	<i>Nm</i>	480	480	480	480	480	480	480	315	480	480	480	480	480	
			<i>in.lb</i>	4248	4248	4248	4248	4248	4248	4248	2788	4248	4248	4248	4248	4248	4248
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)		n_{1N}	<i>rpm</i>	2300	2300	2300	2300	2300	2300	2300	2300	2300	2300	2300	2800	2800	
Max. input speed		n_{1Max}	<i>rpm</i>	5500	5500	5500	5500	5500	5500	5500	5500	5500	5500	5500	5500	5500	
Mean no load running torque ^{b)} (at n_1 =3000 rpm and 20 °C gearbox temperature)		T_{012}	<i>Nm</i>	1.3	1.1	0.98	0.95	0.85	0.8	0.76	0.79	0.7	0.66	0.61	0.56	0.52	
			<i>in.lb</i>	12	9.7	8.7	8.4	7.5	7.1	6.7	7	6.2	5.8	5.4	5	4.6	
Max. backlash		j_t	<i>arcmin</i>	≤ 15													
Torsional rigidity ^{b)}		C_{21}	<i>Nm/arcmin</i>	16	16	16	16	16	16	16	16	16	16	16	16	14	
			<i>in.lb/arcmin</i>	142	142	142	142	142	142	142	142	142	142	142	142	142	124
Max. axial force ^{c)}		F_{2AMax}	<i>N</i>	2500													
			<i>lb_f</i>	563													
Max. lateral force ^{c)}		F_{2QMax}	<i>N</i>	1750													
			<i>lb_f</i>	394													
Max. tilting moment		M_{2KMax}	<i>Nm</i>	98													
			<i>in.lb</i>	867													
Efficiency at full load		η	%	95													
Service life		L_h	<i>h</i>	> 20000													
Weight (incl. standard adapter plate)		m	<i>kg</i>	9.6													
			<i>lb_m</i>	21													
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)		L_{PA}	<i>dB(A)</i>	≤ 66													
Max. permitted housing temperature			°C	+90													
			°F	+194													
Ambient temperature			°C	–15 to +40													
			°F	+5 to +104													
Lubrication				Lubricated for life													
Direction of rotation				In- and output same direction													
Protection class				IP 64													
Elastomer coupling (recommended product type – validate sizing with cymex®)				ELC-0150BA025.000-X													
Bore diameter of coupling on the application side			<i>mm</i>	X = 019.000 - 036.000													
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	G	24	J_1	<i>kgcm²</i>	2.7	2.5	2.5	2.3	2.3	2.1	2.4	3.1	2.2	2.6	2.2	1.9	1.7
				<i>10⁻³ in.lb.s²</i>	2.4	2.2	2.2	2	2	1.9	2.1	2.7	1.9	2.3	1.9	1.7	1.5
	K	38	J_1	<i>kgcm²</i>	7.9	7.7	7.8	7.5	7.5	7.3	7.5	8.3	7.4	7.8	7.4	7.1	6.9
				<i>10⁻³ in.lb.s²</i>	7	6.8	6.9	6.6	6.6	6.5	6.6	7.3	6.5	6.9	6.5	6.3	6.1

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft

2-stage




up to 24⁴⁾ (G)⁵⁾
clamping hub
diameter

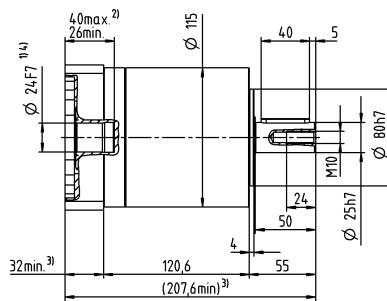

Planetary Gearboxes
Basic Line


Motor shaft diameter [mm]

up to 38⁴⁾ (K)
clamping hub
diameter

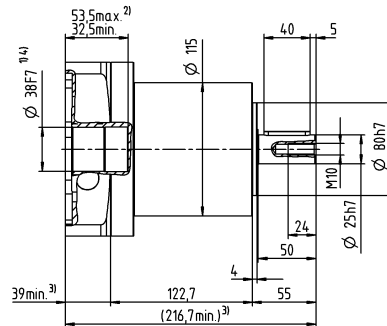

Other output variants

Smooth shaft



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated

by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

CP 045 MF 1- / 2-stage

			1-stage			2-stage				
Ratio	i		5	8	10	25	50	100		
Max. torque ^{a) b) e)}	T_{2a}	Nm	800	640	640	700	700	640		
		in.lb	7081	5665	5665	6196	6196	5665		
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}	Nm	500	400	400	500	500	400		
		in.lb	4425	3540	3540	4425	4425	3540		
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	1000	1000	1000	1000	1000	1000		
		in.lb	8851	8851	8851	8851	8851	8851		
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)	n_{1N}	rpm	2000	2200	2300	2600	3000	3000		
Max. input speed	n_{1Max}	rpm	4000	4000	4000	6000	6000	6000		
Mean no load running torque ^{b)} (at n_1 = 3000 rpm and 20 °C gearbox temperature)	T_{012}	Nm	2.4	2	1.9	0.8	0.6	0.55		
		in.lb	21	18	17	7.1	5.3	4.9		
Max. backlash	j_t	arcmin	≤ 12			≤ 15				
Torsional rigidity ^{b)}	C_{t21}	Nm/arcmin	55	44	44	55	55	44		
		in.lb/arcmin	487	389	389	487	487	389		
Max. axial force ^{c)}	F_{2AMax}	N	6000			6000				
		lb _f								
Max. lateral force ^{c)}	F_{2QMMax}	N	8000			8000				
		lb _f								
Max. tilting moment	M_{2KMMax}	Nm	704			704				
		in.lb	6231			6231				
Efficiency at full load	η	%	97			95				
Service life	L_h	h	> 20000			> 20000				
Weight (incl. standard adapter plate)	m	kg	20			21				
		lb _m	44			46				
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 68			≤ 65				
Max. permitted housing temperature		°C	+90			+90				
		°F	+194			+194				
Ambient temperature		°C	-15 to +40			-15 to +40				
		°F	+5 to +104			+5 to +104				
Lubrication			Lubricated for life							
Direction of rotation			In- and output same direction							
Protection class			IP 64							
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0300BA040.000-X							
Bore diameter of coupling on the application side		mm	X = 020.000 - 045.000							
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	E	19	J_1	kgcm ²	–	–	–	1.2	1.1	0.82
				10 ⁻³ in.lb.s ²	–	–	–	1,1	0,97	0,73
	G	24	J_1	kgcm ²	–	–	–	2	1,8	1,6
				10 ⁻³ in.lb.s ²	–	–	–	1,8	1,6	1,4
	H	28	J_1	kgcm ²	–	–	–	1,7	1,5	1,3
				10 ⁻³ in.lb.s ²	–	–	–	1,5	1,3	1,2
	I	32	J_1	kgcm ²	–	–	–	5,8	5,6	5,4
				10 ⁻³ in.lb.s ²	–	–	–	5,1	5	4,8
	K	38	J_1	kgcm ²	8.8	7.4	7.2	7	6,8	6,5
				10 ⁻³ in.lb.s ²	7.8	6.5	6.4	6,2	6	5,8

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft




1-stage

up to 38⁴⁾ (K)⁵⁾
clamping hub
diameter


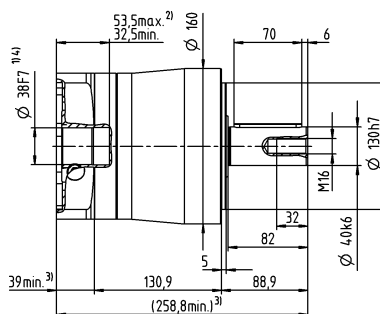



2-stage

up to 19/24/28⁴⁾
(E/G⁵⁾/H)
clamping hub
diameter

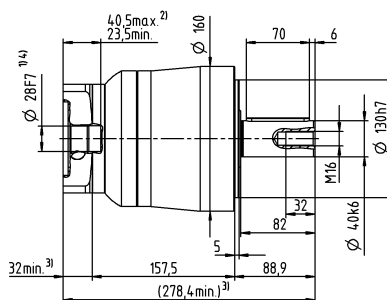


up to 32/38⁴⁾
(I/K)
clamping hub
diameter

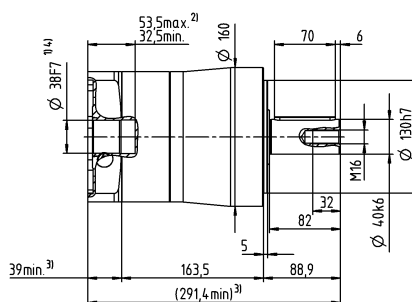

Motor shaft diameter [mm]

Other output variants

Smooth shaft



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

CPS 015 MF 1-stage

				1-stage						
Ratio		i			3	4	5	7	8	10
Max. torque ^{a) b) e)}		T_{2a}		Nm	48	56	58	58	56	56
				in.lb	425	496	513	513	496	496
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)		T_{2B}		Nm	30	35	40	40	35	35
				in.lb	266	310	354	354	310	310
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)		T_{2Not}		Nm	75	75	75	75	75	75
				in.lb	664	664	664	664	664	664
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)		n_{1N}		rpm	3300	3300	3300	4000	4000	4000
Max. input speed		n_{1Max}		rpm	7000	7000	7000	7000	7000	7000
Mean no load running torque ^{b)} (at n_1 =3000 rpm and 20 °C gearbox temperature)		T_{012}		Nm	0.25	0.2	0.17	0.15	0.14	0.13
				in.lb	2.2	1.8	1.5	1.3	1.2	1.2
Max. backlash		j_t		arcmin	≤ 12					
Torsional rigidity ^{b)}		C_{t21}		Nm/arcmin	2.1	2.1	2.1	2.1	1.9	1.9
				in.lb/arcmin	19	19	19	19	17	17
Max. axial force ^{c)}		F_{2AMax}		N	750					
				lb _f	169					
Max. lateral force ^{c)}		F_{2QMax}		N	500					
				lb _f	113					
Max. tilting moment		M_{2KMax}		Nm	17					
				in.lb	150					
Efficiency at full load		η		%	97					
Service life		L_h		h	> 20000					
Weight (incl. standard adapter plate)		m		kg	1.4					
				lb _m	3.1					
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)		L_{PA}		dB(A)	≤ 60					
Max. permitted housing temperature				°C	+90					
				°F	+194					
Ambient temperature				°C	–15 to +40					
				°F	+5 to +104					
Lubrication					Lubricated for life					
Direction of rotation					In- and output same direction					
Protection class					IP 64					
Elastomer coupling (recommended product type – validate sizing with cymex®)					ELC-0020BA014.000-X					
Bore diameter of coupling on the application side				mm	X = 008.000 - 025.000					
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	C	14	J_1	kgcm ²	0.23	0.2	0.18	0.15	0.15	0.15
				10 ⁻³ in.lb.s ²	0.2	0.18	0.16	0.13	0.13	0.13
	E	19	J_1	kgcm ²	0.43	0.4	0.39	0.38	0.38	0.37
				10 ⁻³ in.lb.s ²	0.38	0.35	0.35	0.34	0.34	0.33

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Valid for: Smooth shaft

1-stage

up to 14⁴⁾ (C)⁵⁾
clamping hub
diameter

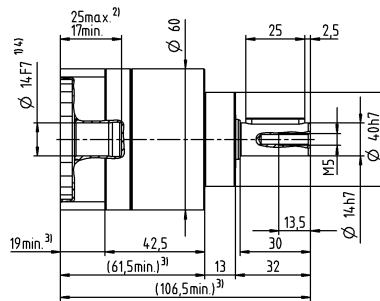

up to 19⁴⁾ (E)
clamping hub
diameter

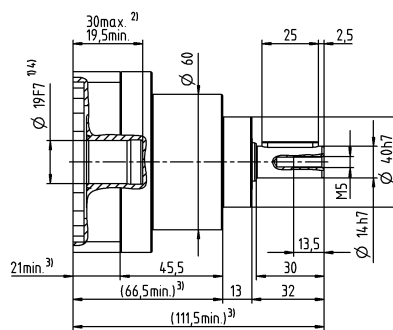


Motor shaft diameter [mm]


Planetary Gearboxes
Basic Line

Other output variants

Smooth shaft



Replaceable B5 output flange

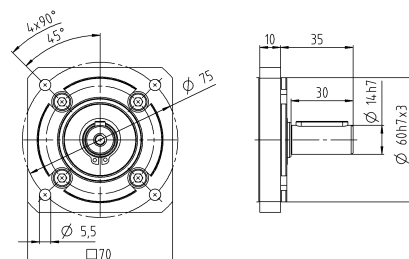

Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated

by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

CPS 015 MF 2-stage

				2-stage													
Ratio		i		9	12	15	16	20	25	28	30	35	40	50	70	100	
Max. torque ^{a) b) e)}		T_{2a}	Nm	48	48	48	56	56	58	56	48	58	56	58	58	56	
			$in.lb$	425	425	425	496	496	513	496	425	513	496	513	513	496	
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)		T_{2B}	Nm	30	30	30	35	35	40	35	30	40	35	40	40	35	
			$in.lb$	266	266	266	310	310	354	310	266	354	310	354	354	310	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)		T_{2Not}	Nm	75	75	75	75	75	75	75	75	75	75	75	75	75	
			$in.lb$	664	664	664	664	664	664	664	664	664	664	664	664	664	
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)		n_{1N}	rpm	3300	3300	3300	3300	3300	3300	3300	3300	3300	3300	3300	4000	4000	
Max. input speed		n_{1Max}	rpm	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	
Mean no load running torque ^{b)} (at n_1 =3000 rpm and 20 °C gearbox temperature)		T_{012}	Nm	0.33	0.28	0.26	0.25	0.22	0.21	0.2	0.21	0.18	0.17	0.16	0.15	0.14	
			$in.lb$	2.9	2.5	2.3	2.2	1.9	1.9	1.8	1.9	1.6	1.5	1.4	1.3	1.2	
Max. backlash		j_t	$arcmin$	≤ 15													
Torsional rigidity ^{b)}		C_{t21}	$Nm/arcmin$	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	1.9	
			$in.lb/arcmin$	19	19	19	19	19	19	19	19	19	19	19	19	19	17
Max. axial force ^{c)}		F_{2AMax}	N	750													
			lb_f	169													
Max. lateral force ^{c)}		F_{2QMMax}	N	500													
			lb_f	113													
Max. tilting moment		M_{2KMax}	Nm	17													
			$in.lb$	150													
Efficiency at full load		η	%	95													
Service life		L_h	h	> 20000													
Weight (incl. standard adapter plate)		m	kg	1.8													
			lb_m	4													
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)		L_{PA}	$dB(A)$	≤ 60													
Max. permitted housing temperature			°C	+90													
			°F	+194													
Ambient temperature			°C	–15 to +40													
			°F	+5 to +104													
Lubrication				Lubricated for life													
Direction of rotation				In- and output same direction													
Protection class				IP 64													
Elastomer coupling (recommended product type – validate sizing with cymex®)				ELC-0020BA014.000-X													
Bore diameter of coupling on the application side			mm	X = 008.000 - 025.000													
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	C	14	J_i	$kgcm^2$	0.22	0.22	0.21	0.2	0.19	0.18	0.17	0.19	0.16	0.17	0.16	0.15	0.15
				$10^{-3} in.lb.s^2$	0.19	0.19	0.19	0.18	0.17	0.16	0.15	0.17	0.14	0.15	0.14	0.13	0.13
	E	19	J_i	$kgcm^2$	0.43	0.42	0.42	0.4	0.4	0.39	0.39	0.41	0.39	0.39	0.38	0.38	0.37
				$10^{-3} in.lb.s^2$	0.38	0.37	0.37	0.35	0.35	0.35	0.35	0.36	0.35	0.35	0.34	0.34	0.33

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft




2-stage

up to 14⁴⁾ (C)⁵⁾
clamping hub
diameter

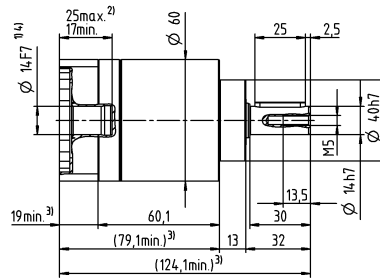

Planetary Gearboxes
Basic Line


up to 19⁴⁾ (E)
clamping hub
diameter

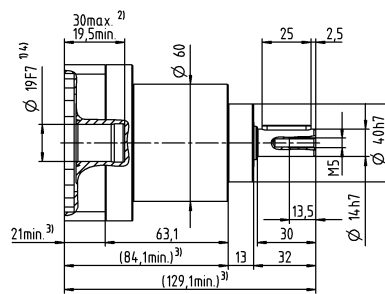



Motor shaft diameter [mm]

Other output variants

Smooth shaft



Replaceable B5 output flange



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated

by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

CPS 025 MF 1-stage

			1-stage							
Ratio		i		3	4	5	7	8	10	
Max. torque ^{a) b) e)}		T_{2a}	Nm	112	150	150	150	144	144	
			in.lb	991	1328	1328	1328	1275	1275	
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)		T_{2B}	Nm	70	95	100	100	90	90	
			in.lb	620	841	885	885	797	797	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)		T_{2Not}	Nm	114	152	187	187	187	187	
			in.lb	1009	1345	1655	1655	1655	1655	
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)		n_{1N}	rpm	3100	3100	3100	3600	3600	3600	
Max. input speed		n_{1Max}	rpm	7000	7000	7000	7000	7000	7000	
Mean no load running torque ^{b)} (at n_1 =3000 rpm and 20 °C gearbox temperature)		T_{012}	Nm	0.38	0.3	0.26	0.23	0.21	0.19	
			in.lb	3.4	2.7	2.3	2	1.9	1.7	
Max. backlash		j_t	arcmin	≤ 12						
Torsional rigidity ^{b)}		C_{t21}	Nm/arcmin	6.1	6.1	6.1	6.1	5.5	5.5	
			in.lb/arcmin	54	54	54	54	49	49	
Max. axial force ^{c)}		F_{2AMax}	N	1600						
			lb _f	360						
Max. lateral force ^{c)}		F_{2QMMax}	N	1200						
			lb _f	270						
Max. tilting moment		M_{2KMMax}	Nm	54						
			in.lb	478						
Efficiency at full load		η	%	97						
Service life		L_h	h	> 20000						
Weight (incl. standard adapter plate)		m	kg	2.9						
			lb _m	6.4						
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)		L_{PA}	dB(A)	≤ 62						
Max. permitted housing temperature			°C	+90						
			°F	+194						
Ambient temperature			°C	–15 to +40						
			°F	+5 to +104						
Lubrication				Lubricated for life						
Direction of rotation				In- and output same direction						
Protection class				IP 64						
Elastomer coupling (recommended product type – validate sizing with cymex®)				ELC-0060BA020.000-X						
Bore diameter of coupling on the application side			mm	X = 012.000 - 032.000						
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	E	19	J_1	kgcm ²	0.66	0.53	0.48	0.43	0.41	0.4
				10 ⁻³ in.lb.s ²	0.58	0.47	0.42	0.38	0.36	0.35
	G	24	J_1	kgcm ²	1.5	1.4	1.3	1.3	1.3	1.3
				10 ⁻³ in.lb.s ²	1.3	1.2	1.2	1.2	1.2	1.2

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Valid for: Smooth shaft

1-stage

up to 19⁴⁾ (E)⁵⁾
clamping hub
diameter

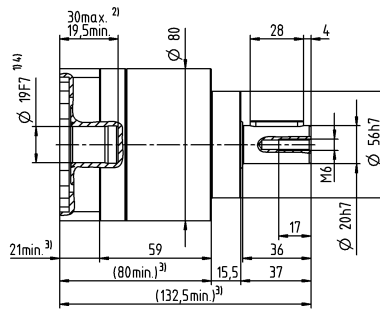

up to 24⁴⁾ (G)
clamping hub
diameter

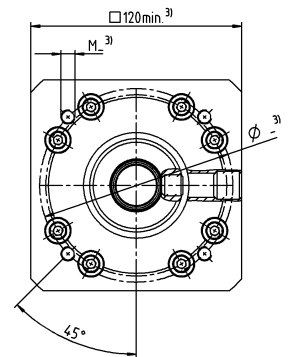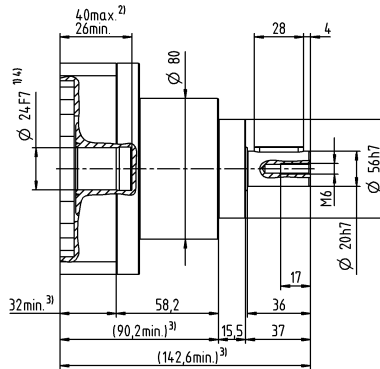


Motor shaft diameter [mm]


Planetary Gearboxes
Basic Line

Other output variants

Smooth shaft



Replaceable B5 output flange

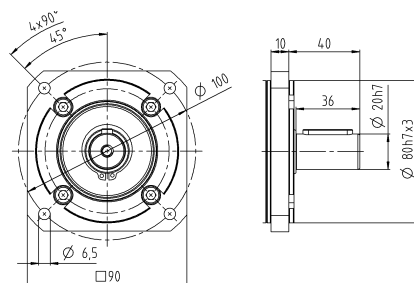

Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

CPS 025 MF 2-stage

				2-stage													
Ratio		i		9	12	15	16	20	25	28	30	35	40	50	70	100	
Max. torque ^{a) b) e)}		T_{2a}	Nm	112	112	112	150	150	150	150	112	150	150	150	150	144	
			$in.lb$	991	991	991	1328	1328	1328	1328	991	1328	1328	1328	1328	1275	
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)		T_{2B}	Nm	70	70	70	95	95	95	95	70	100	95	100	100	90	
			$in.lb$	620	620	620	841	841	841	841	620	885	841	885	885	797	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)		T_{2Not}	Nm	187	187	187	187	187	187	187	187	187	187	187	187	187	
			$in.lb$	1655	1655	1655	1655	1655	1655	1655	1655	1655	1655	1655	1655	1655	
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)		n_{1N}	rpm	3100	3100	3100	3100	3100	3100	3100	3100	3100	3100	3100	3600	3600	
Max. input speed		n_{1Max}	rpm	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	
Mean no load running torque ^{b)} (at n_1 =3000 rpm and 20 °C gearbox temperature)		T_{012}	Nm	0.5	0.43	0.39	0.38	0.34	0.32	0.3	0.31	0.28	0.26	0.24	0.22	0.21	
			$in.lb$	4.4	3.8	3.5	3.4	3	2.8	2.7	2.7	2.5	2.3	2.1	1.9	1.9	
Max. backlash		j_t	$arcmin$	≤ 15													
Torsional rigidity ^{b)}		C_{t21}	$Nm/arcmin$	6.1	6.1	6.1	6.1	6.1	6.1	6.1	6.1	6.1	6.1	6.1	6.1	5.5	
			$in.lb/arcmin$	54	54	54	54	54	54	54	54	54	54	54	54	49	
Max. axial force ^{c)}		F_{2AMax}	N	1600													
			lb_f	360													
Max. lateral force ^{c)}		F_{2QMax}	N	1200													
			lb_f	270													
Max. tilting moment		M_{2KMx}	Nm	54													
			$in.lb$	478													
Efficiency at full load		η	%	95													
Service life		L_h	h	> 20000													
Weight (incl. standard adapter plate)		m	kg	3.7													
			lb_m	8.2													
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)		L_{PA}	$dB(A)$	≤ 62													
Max. permitted housing temperature			°C	+90													
			°F	+194													
Ambient temperature			°C	–15 to +40													
			°F	+5 to +104													
Lubrication				Lubricated for life													
Direction of rotation				In- and output same direction													
Protection class				IP 64													
Elastomer coupling (recommended product type – validate sizing with cymex®)				ELC-0060BA020.000-X													
Bore diameter of coupling on the application side			mm	X = 012.000 - 032.000													
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	E	19	J_1	$kgcm^2$	0.66	1.4	1.6	0.98	1.1	0.82	1.2	2.1	0.88	1.4	1	0.71	0.54
				$10^{-3} in.lb.s^2$	0.58	1.2	1.4	0.87	0.97	0.73	1.1	1.9	0.78	1.2	0.89	0.63	0.48
	G	24	J_1	$kgcm^2$	1.5	2.3	2.4	1.8	1.9	1.7	2	3	1.7	2.2	1.9	1.6	1.4
				$10^{-3} in.lb.s^2$	1.3	2	2.1	1.6	1.7	1.5	1.8	2.7	1.5	1.9	1.7	1.4	1.2

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Valid for: Smooth shaft

2-stage

up to 19⁴⁾ (E)⁵⁾
clamping hub
diameter

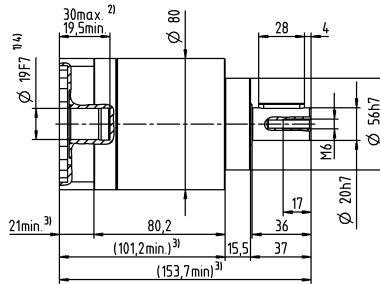

up to 24⁴⁾ (G)
clamping hub
diameter

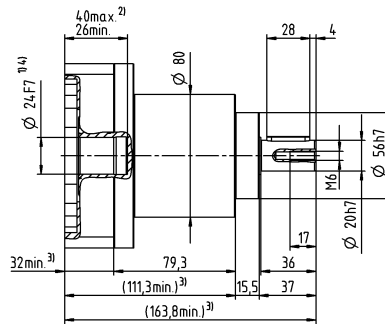


Motor shaft diameter [mm]


Planetary Gearboxes
Basic Line

Other output variants

Smooth shaft



Replaceable B5 output flange

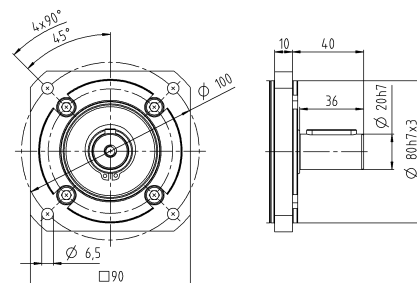

Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated

by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

CPS 035 MF 1-stage

				1-stage						
Ratio		i		3	4	5	7	8	10	
Max. torque ^{a) b) e)}		T_{2a}	Nm	272	272	272	272	272	272	
			in.lb	2407	2407	2407	2407	2407	2407	
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)		T_{2B}	Nm	175	255	250	250	220	220	
			in.lb	1549	2257	2213	2213	1947	1947	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)		T_{2Not}	Nm	460	480	480	480	470	480	
			in.lb	4071	4248	4248	4248	4160	4248	
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)		n_{1N}	rpm	2300	2300	2300	2800	2800	2800	
Max. input speed		n_{1Max}	rpm	5500	5500	5500	5500	5500	5500	
Mean no load running torque ^{b)} (at n_1 =3000 rpm and 20 °C gearbox temperature)		T_{012}	Nm	0.95	0.76	0.66	0.57	0.52	0.48	
			in.lb	8.4	6.7	5.8	5	4.6	4.2	
Max. backlash		j_t	arcmin	≤ 12						
Torsional rigidity ^{b)}		C_{t21}	Nm/arcmin	16	16	16	16	14	14	
			in.lb/arcmin	142	142	142	142	124	124	
Max. axial force ^{c)}		F_{2AMax}	N	2500						
			lb _f	563						
Max. lateral force ^{c)}		F_{2QMax}	N	1750						
			lb _f	394						
Max. tilting moment		M_{2KMax}	Nm	98						
			in.lb	867						
Efficiency at full load		η	%	97						
Service life		L_h	h	> 20000						
Weight (incl. standard adapter plate)		m	kg	7.5						
			lb _m	17						
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)		L_{PA}	dB(A)	≤ 66						
Max. permitted housing temperature			°C	+90						
			°F	+194						
Ambient temperature			°C	–15 to +40						
			°F	+5 to +104						
Lubrication				Lubricated for life						
Direction of rotation				In- and output same direction						
Protection class				IP 64						
Elastomer coupling (recommended product type – validate sizing with cymex®)				ELC-0150BA025.000-X						
Bore diameter of coupling on the application side			mm	X = 019.000 - 036.000						
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	G	24	J_1	kgcm ²	2.6	1.9	1.7	1.5	1.4	1.4
				10 ⁻³ in.lb.s ²	2.3	1.7	1.5	1.3	1.2	1.2
	K	38	J_1	kgcm ²	7.8	7.1	6.9	6.7	6.6	6.5
				10 ⁻³ in.lb.s ²	6.9	6.3	6.1	5.9	5.8	5.8

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft




1-stage

up to 24⁴⁾ (G)⁵⁾
clamping hub
diameter

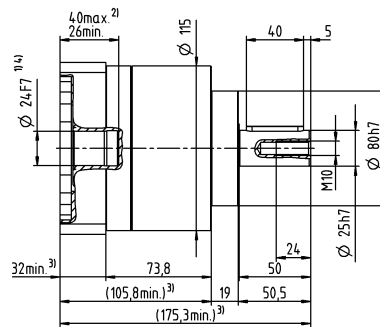

Planetary Gearboxes
Basic Line


up to 38⁴⁾ (K)
clamping hub
diameter

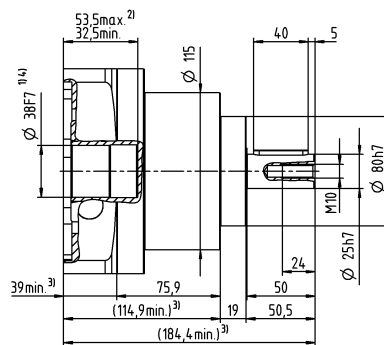


Motor shaft diameter [mm]

Other output variants

Smooth shaft



Replaceable B5 output flange

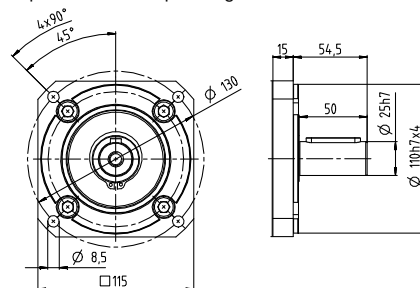

Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

CPS 035 MF 2-stage

				2-stage													
Ratio		i		9	12	15	16	20	25	28	30	35	40	50	70	100	
Max. torque ^{a) b) e)}		T_{2a}	Nm	272	272	272	272	272	272	272	272	272	272	272	272	272	
			$in.lb$	2407	2407	2407	2407	2407	2407	2407	2407	2407	2407	2407	2407	2407	2407
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)		T_{2B}	Nm	175	175	175	255	255	250	255	175	250	255	250	250	220	
			$in.lb$	1549	1549	1549	2257	2257	2213	2257	1549	2213	2257	2213	2213	1947	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)		T_{2Not}	Nm	480	480	480	480	480	480	480	315	480	480	480	480	480	
			$in.lb$	4248	4248	4248	4248	4248	4248	4248	2788	4248	4248	4248	4248	4248	
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)		n_{1N}	rpm	2300	2300	2300	2300	2300	2300	2300	2300	2300	2300	2300	2800	2800	
Max. input speed		n_{1Max}	rpm	5500	5500	5500	5500	5500	5500	5500	5500	5500	5500	5500	5500	5500	
Mean no load running torque ^{b)} (at n_1 =3000 rpm and 20 °C gearbox temperature)		T_{012}	Nm	1.3	1.1	0.98	0.95	0.85	0.8	0.76	0.79	0.7	0.66	0.61	0.56	0.52	
			$in.lb$	12	9.7	8.7	8.4	7.5	7.1	6.7	7	6.2	5.8	5.4	5	4.6	
Max. backlash		j_t	$arcmin$	≤ 15													
Torsional rigidity ^{b)}		C_{t21}	$Nm/arcmin$	16	16	16	16	16	16	16	16	16	16	16	16	14	
			$in.lb/arcmin$	142	142	142	142	142	142	142	142	142	142	142	142	124	
Max. axial force ^{c)}		F_{2AMax}	N	2500													
			lb_f	563													
Max. lateral force ^{c)}		F_{2QMMax}	N	1750													
			lb_f	394													
Max. tilting moment		M_{2KMax}	Nm	98													
			$in.lb$	867													
Efficiency at full load		η	%	95													
Service life		L_h	h	> 20000													
Weight (incl. standard adapter plate)		m	kg	9.6													
			lb_m	21													
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)		L_{PA}	$dB(A)$	≤ 66													
Max. permitted housing temperature			°C	+90													
			°F	+194													
Ambient temperature			°C	–15 to +40													
			°F	+5 to +104													
Lubrication				Lubricated for life													
Direction of rotation				In- and output same direction													
Protection class				IP 64													
Elastomer coupling (recommended product type – validate sizing with cymex®)				ELC-0150BA025.000-X													
Bore diameter of coupling on the application side			mm	X = 019.000 - 036.000													
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	G	24	J_1	$kgcm^2$	2.7	2.5	2.5	2.3	2.3	2.1	2.4	3.1	2.2	2.6	2.2	1.9	1.7
				$10^{-3} in.lb.s^2$	2.4	2.2	2.2	2	2	1.9	2.1	2.7	1.9	2.3	1.9	1.7	1.5
	K	38	J_1	$kgcm^2$	7.9	7.7	7.8	7.5	7.5	7.3	7.5	8.3	7.4	7.8	7.4	7.1	6.9
				$10^{-3} in.lb.s^2$	7	6.8	6.9	6.6	6.6	6.5	6.6	7.3	6.5	6.9	6.5	6.3	6.1

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Valid for: Smooth shaft

2-stage

up to 24⁴⁾ (G)⁵⁾
clamping hub
diameter

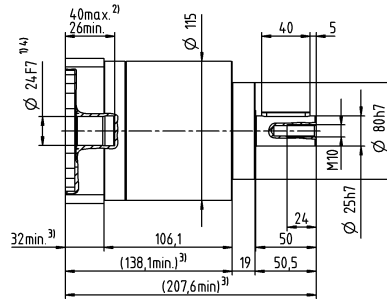


up to 38⁴⁾ (K)
clamping hub
diameter

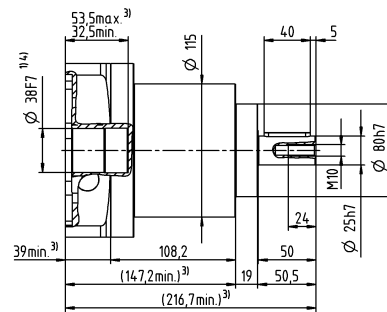



Motor shaft diameter [mm]

Other output variants

Smooth shaft



Replaceable B5 output flange



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated


by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter


alpha Basic Line

BEVEL GEARBOXES CPK / CPSK


The bevel gearboxes of the alpha Basic Line achieve a high power density thanks to the specially designed toothing. Thus they can optimally combine the benefits of a planetary gearbox and an angle section. The extremely compact design also enables use in confined installation situations.

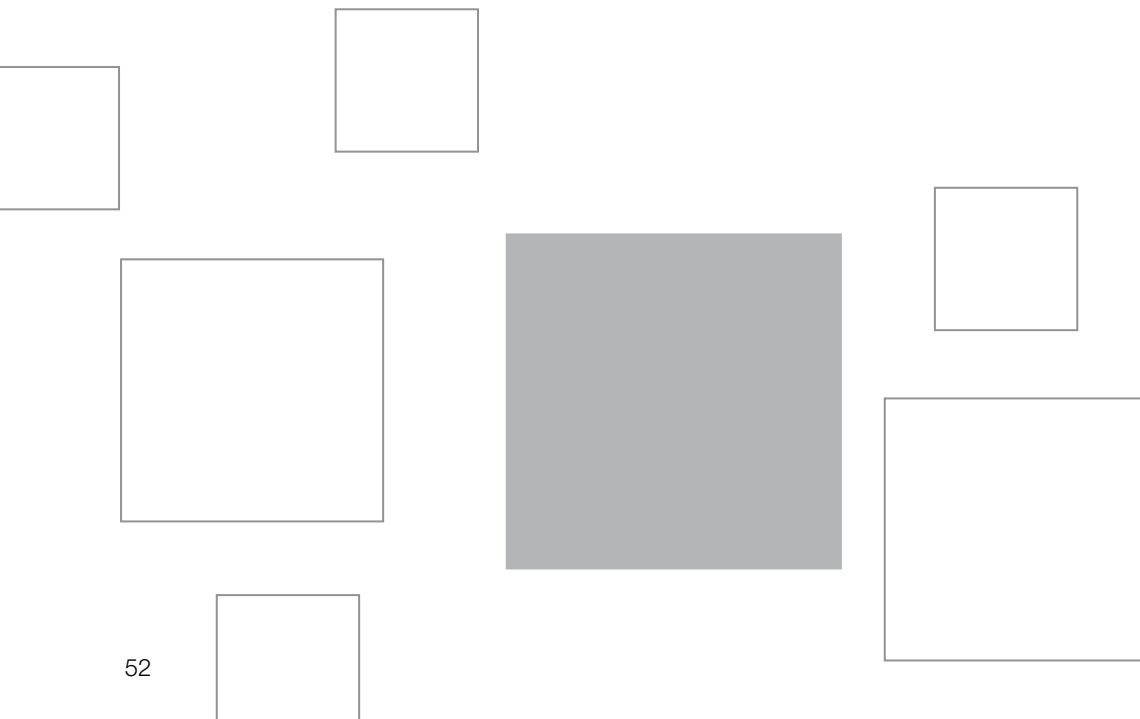


CPK

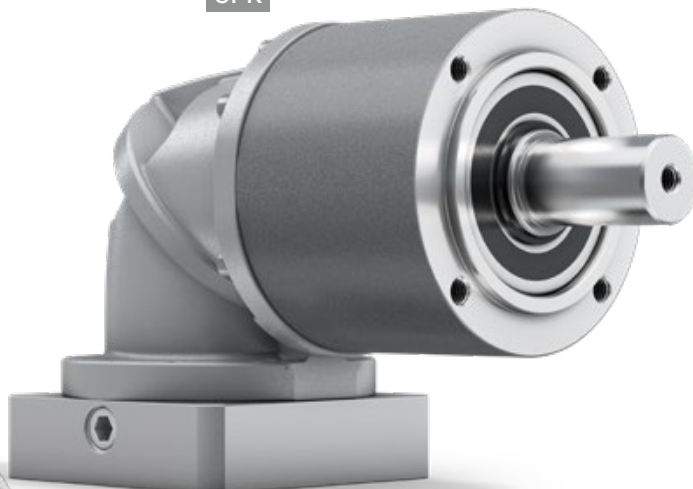

CPSK

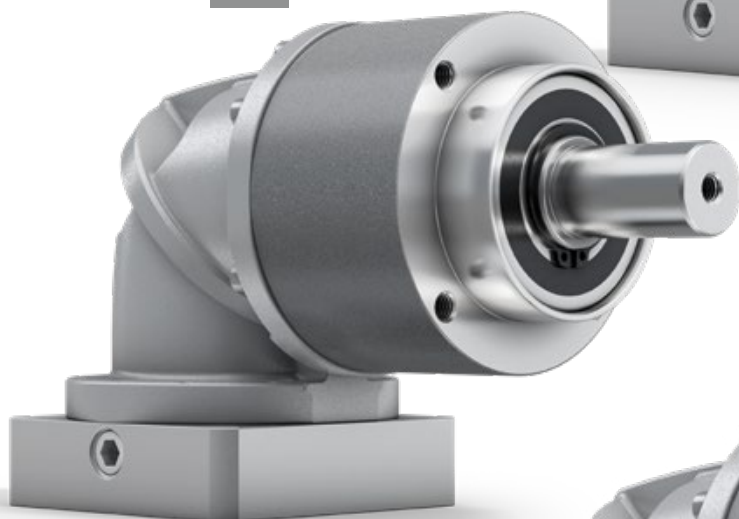


CPSK *

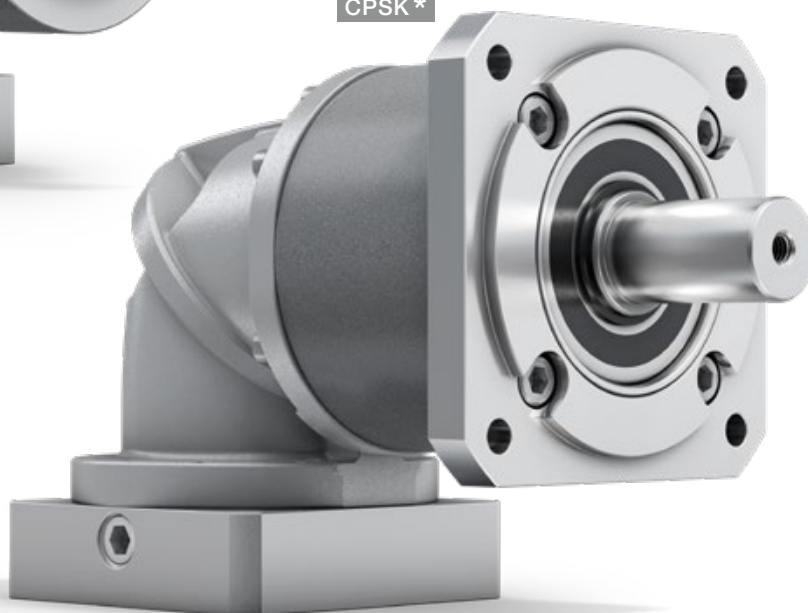

* CPSK with replaceable B5 output flange


CPK / CPSK – Geared up to Fit

CPK

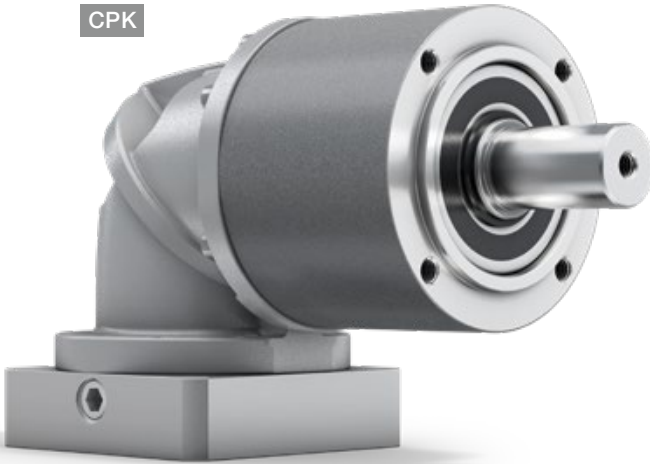

Economically around the corner. The right-angle gearboxes of the alpha Basic Line are specially designed for applications with medium requirements for positioning accuracy. The extremely compact bevel gear stage enables use in applications with space constraints.

PRODUCT HIGHLIGHTS



High flexibility

Various output variants offer design freedom tailored to individual requirements.



Maximum economy

The alpha Basic Line is extremely economical to purchase and highly efficient in operation.




High power density

The gearboxes offer high power density in the smallest installation space.



Quick sizing


Efficient online sizing within seconds in the SIZING ASSISTANT on the basis of the application data or the motor.



CPSK – bevel gearbox with replaceable B5 output flange



CPSK – bevel gearbox with long centering

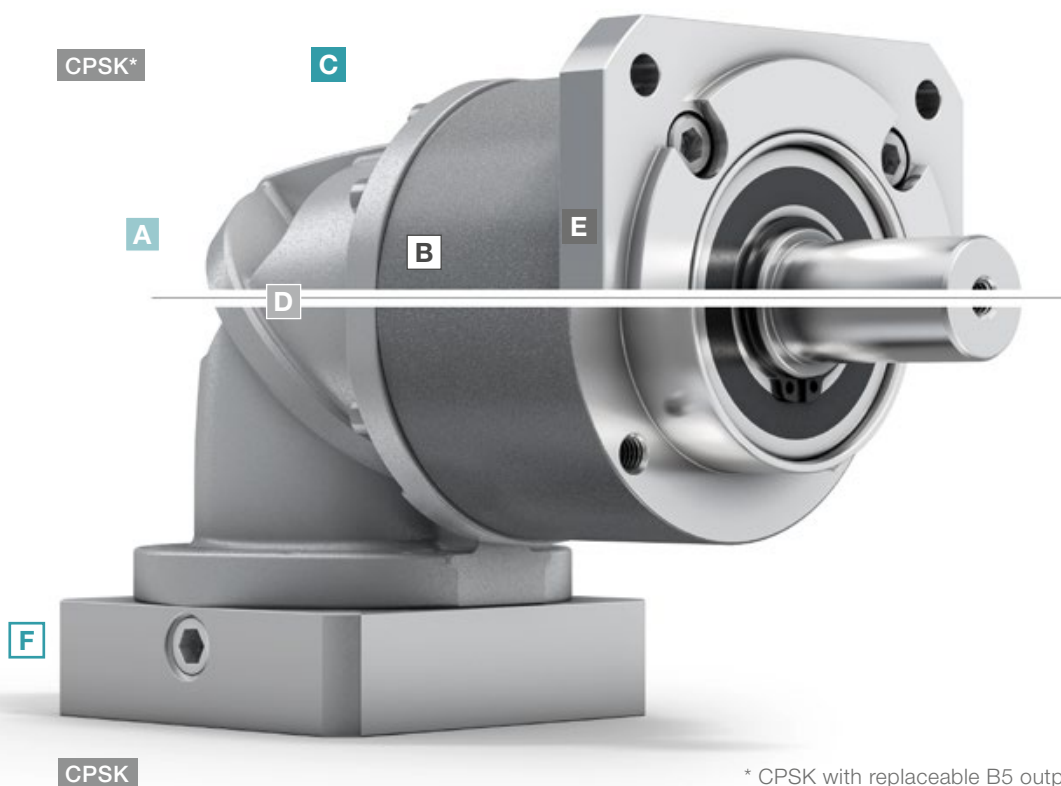

* CPSK with replaceable B5 output flange

- A Variety of sizes**
- CPK available in five different sizes (005 – 045)
 - CPSK available in three different sizes (015 – 035)

- B High ratio variation**
- Large number of ratios ($i=3$ to $i=100$)
 - Available in the common binary ratios

- C Design**
- The elegant design underlines the dynamics of the gearbox and sets new standards on the market

- D Compactness**
- The extremely compact design of the angle section enables use in very confined installation spaces

- E Variable application connection**
- Shortened installation space and maximum compactness thanks to a long centering
 - Flange attachment for B5 mounting

- F Flexible motor connection**
- As with the planetary gearboxes of the alpha Basic Line, mounting of all common servo motors takes place by means of a flexible and screw-fastened adapter plate
 - Large number of motor shaft diameters connectable



CPK – bevel gearbox with elastomer coupling



SIZING ASSISTANT
YOUR GEARBOX WITHIN SECONDS

Efficient gearbox sizing within seconds – online and without login
www.sizing-assistant.com

CPK 005 MF 2-stage

			2-stage				
Ratio	i		4	5	7	8	10
Max. torque ^{a) b) e)}	T_{2a}	Nm	14	17	21	20	20
		in.lb	124	150	186	177	177
Max. acceleration torque ^{b)} (max. 1000 cycles per hour)	T_{2B}	Nm	6.8	8.5	12	13	13
		in.lb	60	75	106	115	115
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	17	21	26	26	26
		in.lb	150	186	230	230	230
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)	n_{1N}	rpm	3800	3800	3800	3800	3800
Max. input speed	n_{1Max}	rpm	5000	5000	5000	5000	5000
Mean no load running torque ^{b)} (at $n_1=3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	0.25	0.25	0.25	0.25	0.25
		in.lb	2.2	2.2	2.2	2.2	2.2
Max. backlash	j_t	arcmin	≤ 17				
Torsional rigidity ^{b)}	C_{t21}	Nm/arcmin	0.5	0.5	0.5	0.5	0.5
		in.lb/arcmin	4.4	4.4	4.4	4.4	4.4
Max. axial force ^{c)}	F_{2AMax}	N	240				
		lb _f	54				
Max. lateral force ^{c) f)}	F_{2QMMax}	N	170				
		lb _f	38				
Max. tilting moment	M_{2KMMax}	Nm	4				
		in.lb	35				
Efficiency at full load	η	%	95				
Service life	L_h	h	> 20000				
Weight (incl. standard adapter plate)	m	kg	0.86				
		lb _m	1.9				
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 68				
Max. permitted housing temperature		°C	+90				
		°F	+194				
Ambient temperature		°C	0 to +40				
		°F	+32 to +104				
Lubrication			Lubricated for life				
Direction of rotation			In- and output same direction				
Protection class			IP 64				
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0005BA010.000-X				
Bore diameter of coupling on the application side		mm	X = 004.000 - 012.700				
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	B 11	J_1	kgcm ²	0.13	0.13	0.13	0.13
			10 ⁻³ in.lb.s ²	0.12	0.12	0.12	0.12

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com
Please consider the maximum permissible tilting moment caused by the motor M_{1KMot} – see sizing

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures



^{e)} Valid for: Smooth shaft

^{f)} At increased lateral forces – see glossary

Motor shaft diameter [mm]

2-stage


up to 11⁴⁾ (B)⁵⁾
clamping hub
diameter

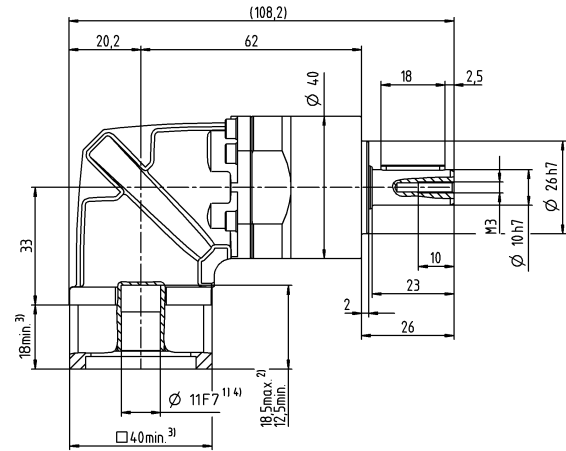

Bevel Gearboxes
Basic Line

Other output variants

Smooth shaft



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated

by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

CPK 005 MF 3-stage

			3-stage								
Ratio	i		16	20	25	28	35	40	50	70	100
Max. torque ^{a) b) e)}	T_{2a}	Nm	17	17	21	17	21	17	21	21	20
		in.lb	150	150	186	150	186	150	186	186	177
Max. acceleration torque ^{b)} (max. 1000 cycles per hour)	T_{2B}	Nm	11	11	14	11	14	11	14	14	13
		in.lb	97	97	124	97	124	97	124	124	115
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	26	26	26	26	26	26	26	26	26
		in.lb	230	230	230	230	230	230	230	230	230
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)	n_{1N}	rpm	3800	3800	3800	3800	3800	3800	3800	3800	3800
Max. input speed	n_{1Max}	rpm	5000	5000	5000	5000	5000	5000	5000	5000	5000
Mean no load running torque ^{b)} (at $n_1=3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	0.27	0.27	0.27	0.27	0.27	0.27	0.27	0.27	0.27
		in.lb	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4
Max. backlash	j_t	arcmin	≤ 20								
Torsional rigidity ^{b)}	C_{t21}	Nm/arcmin	0.57	0.57	0.57	0.57	0.57	0.57	0.57	0.57	0.57
		in.lb/arcmin	5	5	5	5	5	5	5	5	5
Max. axial force ^{c)}	F_{2AMax}	N	240								
		lb _f	54								
Max. lateral force ^{c) f)}	F_{2QMMax}	N	170								
		lb _f	38								
Max. tilting moment	M_{2KMax}	Nm	4								
		in.lb	35								
Efficiency at full load	η	%	94								
Service life	L_h	h	> 20000								
Weight (incl. standard adapter plate)	m	kg	0.92								
		lb _m	2.0								
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 68								
Max. permitted housing temperature		°C	+90								
		°F	+194								
Ambient temperature		°C	0 to +40								
		°F	+32 to +104								
Lubrication			Lubricated for life								
Direction of rotation			In- and output same direction								
Protection class			IP 64								
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0005BA010.000-X								
Bore diameter of coupling on the application side		mm	X = 004.000 - 012.700								
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	B 11	J_1	kgcm ²	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13
			10 ⁻³ in.lb.s ²	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com
Please consider the maximum permissible tilting moment caused by the motor M_{1KMot} – see sizing

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures



^{e)} Valid for: Smooth shaft

^{f)} At increased lateral forces – see glossary

Motor shaft diameter [mm]

3-stage


up to 11⁴⁾ (B)⁵⁾
clamping hub
diameter

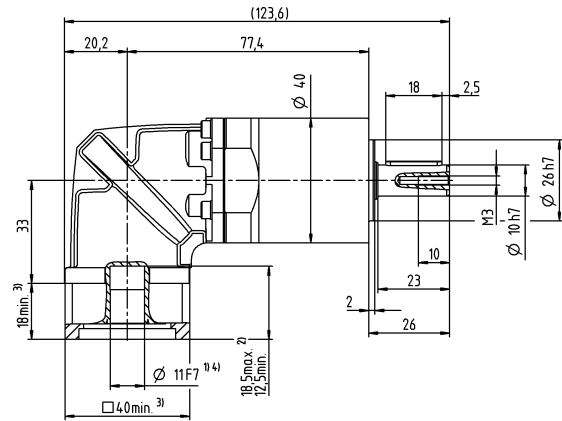

Bevel Gearboxes
Basic Line

Other output variants

Smooth shaft



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated

by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

CPK 015 MF 2-stage

			2-stage					
Ratio	i		3	4	5	7	8	10
Max. torque ^{a) b) e)}	T_{2a}	Nm	33	44	55	58	56	56
		in.lb	292	389	487	513	496	496
Max. acceleration torque ^{b)} (max. 1000 cycles per hour)	T_{2B}	Nm	16	21	27	37	35	35
		in.lb	142	186	239	327	310	310
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	41	55	69	75	75	75
		in.lb	363	487	611	664	664	664
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)	n_{1N}	rpm	3300	3300	3300	3300	3300	3300
Max. input speed	n_{1Max}	rpm	5000	5000	5000	5000	5000	5000
Mean no load running torque ^{b)} (at $n_1=3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	0.55	0.55	0.55	0.55	0.55	0.55
		in.lb	4.9	4.9	4.9	4.9	4.9	4.9
Max. backlash	j_t	arcmin	≤ 17					
Torsional rigidity ^{b)}	C_{t21}	Nm/arcmin	1.7	1.7	1.7	1.7	1.7	1.7
		in.lb/arcmin	15	15	15	15	15	15
Max. axial force ^{c)}	F_{2AMax}	N	750					
		lb _f	169					
Max. lateral force ^{c) f)}	F_{2QMax}	N	500					
		lb _f	113					
Max. tilting moment	M_{2KMax}	Nm	17					
		in.lb	150					
Efficiency at full load	η	%	95					
Service life	L_h	h	> 20000					
Weight (incl. standard adapter plate)	m	kg	1.6					
		lb _m	3.5					
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 70					
Max. permitted housing temperature		°C	+90					
		°F	+194					
Ambient temperature		°C	0 to +40					
		°F	+32 to +104					
Lubrication			Lubricated for life					
Direction of rotation			In- and output same direction					
Protection class			IP 64					
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0020BA014.000-X					
Bore diameter of coupling on the application side		mm	X = 008.000 - 025.000					
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	C 14	J_1	kgcm ²	0.3	0.3	0.3	0.3	0.3
			10 ⁻³ in.lb.s ²	0.27	0.27	0.27	0.27	0.27

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com
Please consider the maximum permissible tilting moment caused by the motor M_{1KMot} – see sizing

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures



^{e)} Valid for: Smooth shaft

^{f)} At increased lateral forces – see glossary

Motor shaft diameter [mm]

2-stage


up to 14⁴⁾ (C)⁵⁾
clamping hub
diameter

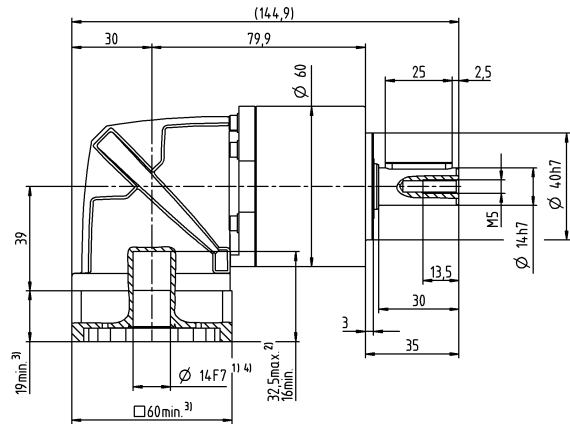

Bevel Gearboxes
Basic Line

Other output variants

Smooth shaft



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

CPK 015 MF 3-stage

			3-stage												
Ratio	i		9	12	15	16	20	25	28	30	35	40	50	70	100
Max. torque ^{a) b) e)}	T_{2a}	Nm	48	48	48	56	56	58	56	48	58	56	58	58	56
		in.lb	425	425	425	496	496	513	496	425	513	496	513	513	496
Max. acceleration torque ^{b)} (max. 1000 cycles per hour)	T_{2B}	Nm	30	30	30	35	35	40	35	30	40	35	40	40	35
		in.lb	266	266	266	310	310	354	310	266	354	310	354	354	310
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	75	75	75	75	75	75	75	75	75	75	75	75	75
		in.lb	664	664	664	664	664	664	664	664	664	664	664	664	664
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)	n_{1N}	rpm	3300	3300	3300	3300	3300	3300	3300	3300	3300	3300	3300	3300	3300
Max. input speed	n_{1Max}	rpm	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000
Mean no load running torque ^{b)} (at $n_1=3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	0.63	0.63	0.63	0.63	0.63	0.63	0.63	0.63	0.63	0.63	0.63	0.63	0.63
		in.lb	5.6	5.6	5.6	5.6	5.6	5.6	5.6	5.6	5.6	5.6	5.6	5.6	5.6
Max. backlash	j_t	arcmin	≤ 17												
Torsional rigidity ^{b)}	C_{t21}	Nm/arcmin	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1
		in.lb/arcmin	19	19	19	19	19	19	19	19	19	19	19	19	19
Max. axial force ^{c)}	F_{2AMax}	N	750												
		lb _f	169												
Max. lateral force ^{c) f)}	F_{2QMMax}	N	500												
		lb _f	113												
Max. tilting moment	M_{2KMMax}	Nm	17												
		in.lb	150												
Efficiency at full load	η	%	94												
Service life	L_h	h	> 20000												
Weight (incl. standard adapter plate)	m	kg	1.8												
		lb _m	4												
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 70												
Max. permitted housing temperature		°C	+90												
		°F	+194												
Ambient temperature		°C	0 to +40												
		°F	+32 to +104												
Lubrication			Lubricated for life												
Direction of rotation			In- and output same direction												
Protection class			IP 64												
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0020BA014.000-X												
Bore diameter of coupling on the application side		mm	X = 008.000 - 025.000												
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	C 14	J_1	kgcm ²	0.31	0.31	0.31	0.31	0.31	0.31	0.31	0.31	0.31	0.31	0.31	0.31
			10 ⁻³ in.lb.s ²	0.27	0.27	0.27	0.27	0.27	0.27	0.27	0.27	0.27	0.27	0.27	0.27



Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com
Please consider the maximum permissible tilting moment caused by the motor M_{1KMot} – see sizing

- ^{a)} Valid for torque transmission only
- ^{b)} Valid for standard clamping hub diameter
- ^{c)} Refers to center of the output shaft or flange
- ^{d)} Please reduce input speed at higher ambient temperatures
- ^{e)} Valid for: Smooth shaft
- ^{f)} At increased lateral forces – see glossary

Motor shaft diameter [mm]

3-stage


up to 14 ⁴⁾ (C) ⁵⁾
clamping hub
diameter

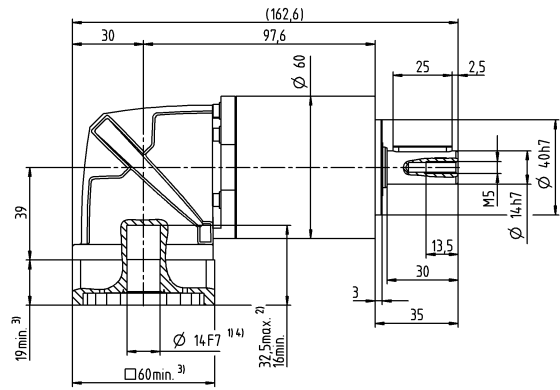

Bevel Gearboxes
Basic Line

Other output variants

Smooth shaft



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

CPK 025 MF 2-stage

			2-stage					
Ratio	i		3	4	5	7	8	10
Max. torque ^{a) b) e)}	T_{2a}	Nm	60	80	100	140	144	144
		in.lb	531	708	885	1239	1275	1275
Max. acceleration torque ^{b)} (max. 1000 cycles per hour)	T_{2B}	Nm	35	47	58	82	90	90
		in.lb	310	416	513	726	797	797
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	90	120	150	187	187	187
		in.lb	797	1062	1328	1655	1655	1655
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)	n_{1N}	rpm	3000	3000	3000	3000	3000	3000
Max. input speed	n_{1Max}	rpm	5000	5000	5000	5000	5000	5000
Mean no load running torque ^{b)} (at $n_1=3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	0.98	0.98	0.98	0.98	0.98	0.98
		in.lb	8.7	8.7	8.7	8.7	8.7	8.7
Max. backlash	j_t	arcmin	≤ 17					
Torsional rigidity ^{b)}	C_{t21}	Nm/arcmin	4.5	4.5	4.5	4.5	4.5	4.5
		in.lb/arcmin	40	40	40	40	40	40
Max. axial force ^{c)}	F_{2AMax}	N	1600					
		lb _f	360					
Max. lateral force ^{c)}	F_{2QMax}	N	1200					
		lb _f	270					
Max. tilting moment	M_{2KMax}	Nm	54					
		in.lb	478					
Efficiency at full load	η	%	95					
Service life	L_h	h	> 20000					
Weight (incl. standard adapter plate)	m	kg	4.2					
		lb _m	9.3					
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 73					
Max. permitted housing temperature		°C	+90					
		°F	+194					
Ambient temperature		°C	0 to +40					
		°F	+32 to +104					
Lubrication			Lubricated for life					
Direction of rotation			In- and output same direction					
Protection class			IP 64					
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0060BA020.000-X					
Bore diameter of coupling on the application side		mm	X = 012.000 - 032.000					
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	E 19	J_1	kgcm ²	0.86	0.86	0.86	0.86	0.86
			10 ⁻³ in.lb.s ²	0.76	0.76	0.76	0.76	0.76

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com
Please consider the maximum permissible tilting moment caused by the motor M_{1KMot} – see sizing

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange



^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft

Motor shaft diameter [mm]

2-stage


up to 19⁴⁾ (E)⁵⁾
clamping hub
diameter

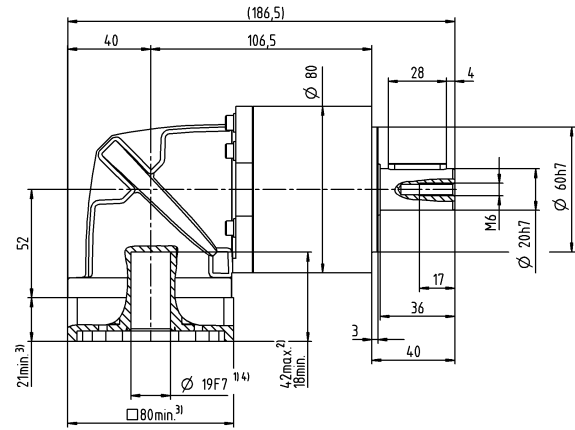

Bevel Gearboxes
Basic Line

Other output variants

Smooth shaft



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

CPK 025 MF 3-stage

			3-stage												
Ratio	i		9	12	15	16	20	25	28	30	35	40	50	70	100
Max. torque ^{a) b) e)}	T_{2a}	Nm	112	112	112	150	150	150	150	112	150	150	150	150	144
		in.lb	991	991	991	1328	1328	1328	1328	991	1328	1328	1328	1328	1275
Max. acceleration torque ^{a)} (max. 1000 cycles per hour)	T_{2B}	Nm	70	70	70	95	95	95	95	70	100	95	100	100	90
		in.lb	620	620	620	841	841	841	841	620	885	841	885	885	797
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	187	187	187	187	187	187	187	187	187	187	187	187	187
		in.lb	1655	1655	1655	1655	1655	1655	1655	1655	1655	1655	1655	1655	1655
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)	n_{1N}	rpm	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000
Max. input speed	n_{1Max}	rpm	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000
Mean no load running torque ^{b)} (at $n_1=3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1
		in.lb	9.7	9.7	9.7	9.7	9.7	9.7	9.7	9.7	9.7	9.7	9.7	9.7	9.7
Max. backlash	j_t	arcmin	≤ 18												
Torsional rigidity ^{b)}	C_{t21}	Nm/arcmin	5.9	5.9	5.9	5.9	5.9	5.9	5.9	5.9	5.9	5.9	5.9	5.9	5.9
		in.lb/arcmin	52	52	52	52	52	52	52	52	52	52	52	52	52
Max. axial force ^{c)}	F_{2AMax}	N	1600												
		lb _f	360												
Max. lateral force ^{c)}	F_{2QMax}	N	1200												
		lb _f	270												
Max. tilting moment	M_{2KMax}	Nm	54												
		in.lb	478												
Efficiency at full load	η	%	94												
Service life	L_h	h	> 20000												
Weight (incl. standard adapter plate)	m	kg	4.5												
		lb _m	9.9												
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 73												
Max. permitted housing temperature		°C	+90												
		°F	+194												
Ambient temperature		°C	0 to +40												
		°F	+32 to +104												
Lubrication			Lubricated for life												
Direction of rotation			In- and output same direction												
Protection class			IP 64												
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0060BA020.000-X												
Bore diameter of coupling on the application side		mm	X = 012.000 - 032.000												
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	E 19	J_1	kgcm ²	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
			10 ⁻³ in.lb.s ²	0.81	0.81	0.81	0.81	0.81	0.81	0.81	0.81	0.81	0.81	0.81	0.81

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com
Please consider the maximum permissible tilting moment caused by the motor M_{1KMot} – see sizing

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange



^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft

Motor shaft diameter [mm]

3-stage


up to 19⁴⁾ (E)⁵⁾
clamping hub
diameter

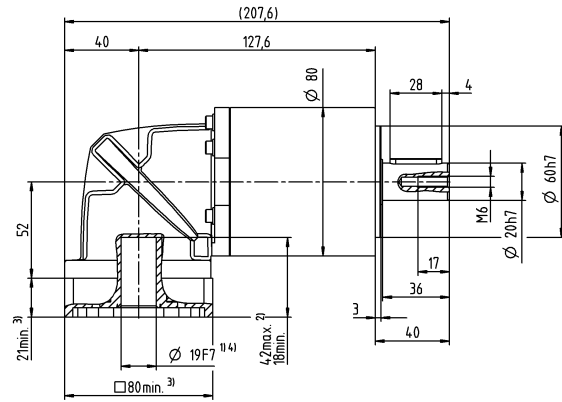

Bevel Gearboxes
Basic Line

Other output variants

Smooth shaft



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

CPK 035 MF 2-stage

			2-stage					
Ratio	i		3	4	5	7	8	10
Max. torque ^{a) b) e)}	T_{2a}	Nm	150	200	250	272	272	272
		in.lb	1328	1770	2213	2407	2407	2407
Max. acceleration torque ^{b)} (max. 1000 cycles per hour)	T_{2B}	Nm	93	124	155	217	220	220
		in.lb	823	1097	1372	1921	1947	1947
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	238	318	397	480	477	480
		in.lb	2106	2815	3514	4248	4222	4248
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)	n_{1N}	rpm	2000	2000	2000	2000	2000	2000
Max. input speed	n_{1Max}	rpm	4500	4500	4500	4500	4500	4500
Mean no load running torque ^{b)} (at $n_1=3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	3.5	3.5	3.5	3.5	3.5	3.5
		in.lb	31	31	31	31	31	31
Max. backlash	j_t	arcmin	≤ 15					
Torsional rigidity ^{b)}	C_{t21}	Nm/arcmin	13	13	13	13	13	13
		in.lb/arcmin	115	115	115	115	115	115
Max. axial force ^{c)}	F_{2AMax}	N	2500					
		lb _f	563					
Max. lateral force ^{c)}	F_{2QMax}	N	1750					
		lb _f	394					
Max. tilting moment	M_{2KMax}	Nm	98					
		in.lb	867					
Efficiency at full load	η	%	95					
Service life	L_h	h	> 20000					
Weight (incl. standard adapter plate)	m	kg	8.8					
		lb _m	19					
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 74					
Max. permitted housing temperature		°C	+90					
		°F	+194					
Ambient temperature		°C	0 to +40					
		°F	+32 to +104					
Lubrication			Lubricated for life					
Direction of rotation			In- and output same direction					
Protection class			IP 64					
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0150BA025.000-X					
Bore diameter of coupling on the application side		mm	X = 019.000 - 036.000					
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	H 28	J_1	kgcm ²	6.1	6.1	6.1	6.1	6.1
			10 ⁻³ in.lb.s ²	5.4	5.4	5.4	5.4	5.4

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com
Please consider the maximum permissible tilting moment caused by the motor M_{1KMot} – see sizing

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange



^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft

Motor shaft diameter [mm]

2-stage


up to 28⁴⁾ (H)⁵⁾
clamping hub
diameter

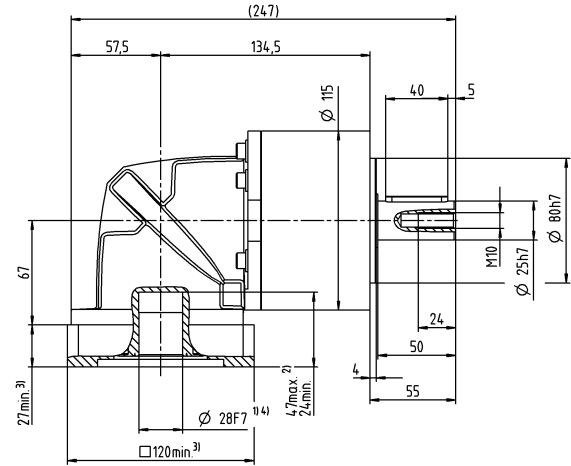

Bevel Gearboxes
Basic Line

Other output variants

Smooth shaft



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

CPK 035 MF 3-stage

				3-stage														
Ratio		i		9	12	15	16	20	25	28	30	32	35	40	50	64	70	100
Max. torque ^{a) b) e)}		T_{2a}	Nm	272	272	272	272	272	272	272	272	272	272	272	272	272	272	272
			in.lb	2407	2407	2407	2407	2407	2407	2407	2407	2407	2407	2407	2407	2407	2407	2407
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)		T_{2B}	Nm	175	175	175	255	255	250	255	175	255	250	255	250	220	250	220
			in.lb	1549	1549	1549	2257	2257	2213	2257	1549	2257	2213	2257	2213	1947	2213	1947
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)		T_{2Not}	Nm	480	480	480	480	480	480	480	315	480	480	480	480	477	480	480
			in.lb	4248	4248	4248	4248	4248	4248	4248	2788	4248	4248	4248	4248	4222	4248	4248
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)		n_{1N}	rpm	2000	2000	2000	2000	2000	2000	2000	2000	2000	2000	2000	2000	2000	2000	2000
Max. input speed		n_{1Max}	rpm	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500
Mean no load running torque ^{b)} (at n_1 =3000 rpm and 20 °C gearbox temperature)		T_{012}	Nm	3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8
			in.lb	34	34	34	34	34	34	34	34	34	34	34	34	34	34	34
Max. backlash		j_t	arcmin	≤ 17														
Torsional rigidity ^{b)}		C_{t21}	Nm/arcmin	16	16	16	16	16	16	16	16	16	16	16	16	16	16	16
			in.lb/arcmin	142	142	142	142	142	142	142	142	142	142	142	142	142	142	142
Max. axial force ^{c)}		F_{2AMax}	N	2500														
			lb _f	563														
Max. lateral force ^{c)}		F_{2QMMax}	N	1750														
			lb _f	394														
Max. tilting moment		M_{2KMMax}	Nm	98														
			in.lb	867														
Efficiency at full load		η	%	94														
Service life		L_h	h	> 20000														
Weight (incl. standard adapter plate)		m	kg	10														
			lb _m	22														
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)		L_{PA}	dB(A)	≤ 74														
Max. permitted housing temperature			°C	+90														
			°F	+194														
Ambient temperature			°C	0 to +40														
			°F	+32 to +104														
Lubrication				Lubricated for life														
Direction of rotation				In- and output same direction														
Protection class				IP 64														
Elastomer coupling (recommended product type – validate sizing with cymex®)				ELC-0150BA025.000-X														
Bore diameter of coupling on the application side			mm	X = 019.000 - 036.000														
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	H	28	J_1	kgcm ²	6.3	6.3	6.3	6.3	6.3	6.3	6.3	6.3	6.3	6.3	6.3	6.3	6.3	6.3
				10 ⁻³ in.lb.s ²	5.6	5.6	5.6	5.6	5.6	5.6	5.6	5.6	5.6	5.6	5.6	5.6	5.6	5.6

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com
Please consider the maximum permissible tilting moment caused by the motor M_{1KMot} – see sizing

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange



^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft

Motor shaft diameter [mm]

3-stage


up to 28⁴⁾ (H)⁵⁾
clamping hub
diameter

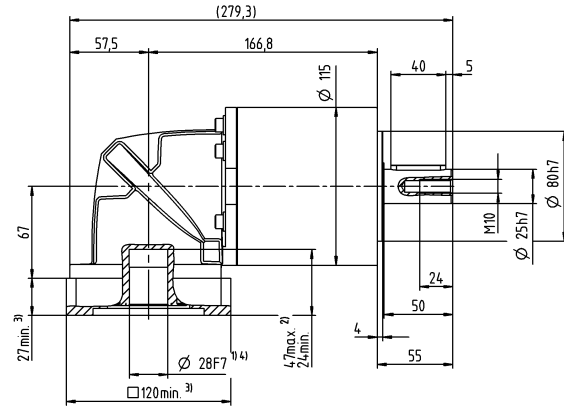

Bevel Gearboxes
Basic Line

Other output variants

Smooth shaft



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

CPK 045 MF 2- / 3-stage



				2-stage			3-stage			
Ratio		i			5	8	10	25	50	100
Max. torque ^{a) b) e)}		T_{2a}	Nm	500	640	640	700	700	640	
			$in.lb$	4425	5665	5665	6196	6196	5665	
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)		T_{2B}	Nm	399	400	400	500	500	400	
			$in.lb$	3531	3540	3540	4425	4425	3540	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)		T_{2Not}	Nm	1000	1000	1000	1000	1000	1000	
			$in.lb$	8851	8851	8851	8851	8851	8851	
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)		n_{1N}	rpm	1600	1600	1600	2000	2000	2000	
Max. input speed		n_{1Max}	rpm	4000	4000	4000	4500	4500	4500	
Mean no load running torque ^{b)} (at n_1 =3000 rpm and 20 °C gearbox temperature)		T_{012}	Nm	6.9	6.9	6.9	3.6	3.6	3.6	
			$in.lb$	61	61	61	32	32	32	
Max. backlash		j_t	$arcmin$	≤ 13			≤ 16			
Torsional rigidity ^{b)}		C_{t21}	$Nm/arcmin$	48	48	48	54	54	54	
			$in.lb/arcmin$	425	425	425	478	478	478	
Max. axial force ^{c)}		F_{2AMax}	N	6000			6000			
			lb_f	1350			1350			
Max. lateral force ^{c)}		F_{2QMax}	N	8000			8000			
			lb_f	1800			1800			
Max. tilting moment		M_{2KMax}	Nm	704			704			
			$in.lb$	6231			6231			
Efficiency at full load		η	%	95			94			
Service life		L_h	h	> 20000			> 20000			
Weight (incl. standard adapter plate)		m	kg	24			21			
			lb_m	53			46			
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)		L_{PA}	$dB(A)$	≤ 74			≤ 78			
Max. permitted housing temperature			°C	+90			+90			
			°F	+194			+194			
Ambient temperature			°C	0 to +40			0 to +40			
			°F	+32 to +104			+32 to +104			
Lubrication				Lubricated for life						
Direction of rotation				In- and output same direction						
Protection class				IP 64						
Elastomer coupling (recommended product type – validate sizing with cymex®)				ELC-0300BA040.000-X						
Bore diameter of coupling on the application side			mm	X = 020.000 - 045.000						
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	H	28	J_1	$kgcm^2$	–	–	–	6.8	6.8	6.8
				$10^{-3} in.lb.s^2$	–	–	–	6	6	6
	K	38	J_1	$kgcm^2$	17	17	17	–	–	–
				$10^{-3} in.lb.s^2$	15	15	15	–	–	–

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com
Please consider the maximum permissible tilting moment caused by the motor M_{1KMot} – see sizing

- ^{a)} Valid for torque transmission only
- ^{b)} Valid for standard clamping hub diameter
- ^{c)} Refers to center of the output shaft or flange
- ^{d)} Please reduce input speed at higher ambient temperatures
- ^{e)} Valid for: Smooth shaft



2-stage

up to 38⁴⁾ (K)⁵⁾
clamping hub
diameter

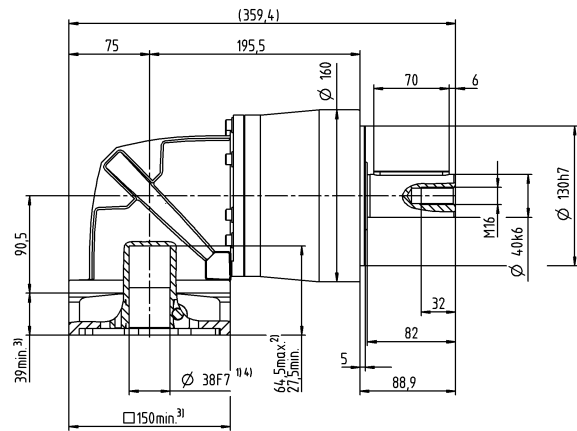

3-stage


up to 28⁴⁾ (H)⁵⁾
clamping hub
diameter

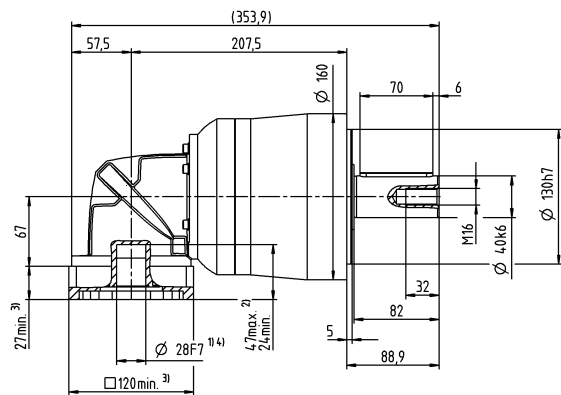

Motor shaft diameter [mm]

Other output variants

Smooth shaft



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

CPSK 015 MF 2-stage

			2-stage					
Ratio	i		3	4	5	7	8	10
Max. torque ^{a) b) e)}	T_{2a}	Nm	33	44	55	58	56	56
		in.lb	292	389	487	513	496	496
Max. acceleration torque ^{b)} (max. 1000 cycles per hour)	T_{2B}	Nm	16	21	27	37	35	35
		in.lb	142	186	239	327	310	310
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	41	55	69	75	75	75
		in.lb	363	487	611	664	664	664
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)	n_{1N}	rpm	3300	3300	3300	3300	3300	3300
Max. input speed	n_{1Max}	rpm	5000	5000	5000	5000	5000	5000
Mean no load running torque ^{b)} (at $n_1=3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	0.55	0.55	0.55	0.55	0.55	0.55
		in.lb	4.9	4.9	4.9	4.9	4.9	4.9
Max. backlash	j_t	arcmin	≤ 17					
Torsional rigidity ^{b)}	C_{t21}	Nm/arcmin	1.7	1.7	1.7	1.7	1.7	1.7
		in.lb/arcmin	15	15	15	15	15	15
Max. axial force ^{c)}	F_{2AMax}	N	750					
		lb _f	169					
Max. lateral force ^{c)}	F_{2QMax}	N	500					
		lb _f	113					
Max. tilting moment	M_{2KMax}	Nm	17					
		in.lb	150					
Efficiency at full load	η	%	95					
Service life	L_h	h	> 20000					
Weight (incl. standard adapter plate)	m	kg	1.6					
		lb _m	3.5					
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 70					
Max. permitted housing temperature		°C	+90					
		°F	+194					
Ambient temperature		°C	0 to +40					
		°F	+32 to +104					
Lubrication			Lubricated for life					
Direction of rotation			In- and output same direction					
Protection class			IP 64					
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0020BA014.000-X					
Bore diameter of coupling on the application side		mm	X = 008.000 - 025.000					
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	C 14	J_1	kgcm ²	0.3	0.3	0.3	0.3	0.3
			10 ⁻³ in.lb.s ²	0.27	0.27	0.27	0.27	0.27

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com
Please consider the maximum permissible tilting moment caused by the motor M_{1KMot} – see sizing

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange


^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft

Motor shaft diameter [mm]

2-stage


up to 14⁴⁾ (C)⁵⁾
clamping hub
diameter

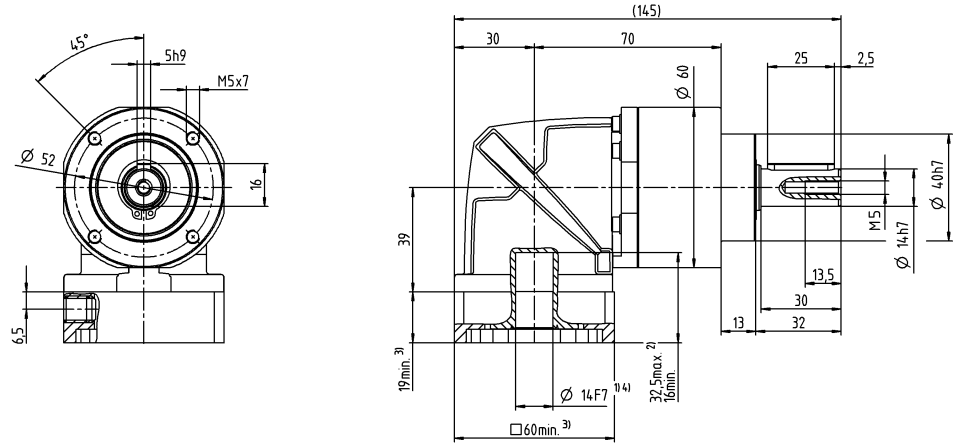


Bevel Gearboxes
Basic Line

Other output variants

Smooth shaft



Replaceable B5 output flange

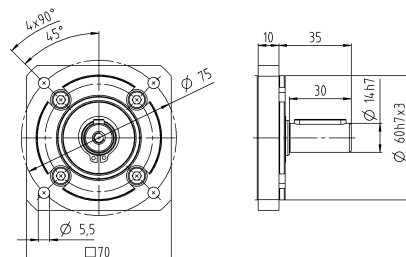

Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

CPSK 015 MF 3-stage

			3-stage												
Ratio	i		9	12	15	16	20	25	28	30	35	40	50	70	100
Max. torque ^{a) b) e)}	T_{2a}	Nm	48	48	48	56	56	58	56	48	58	56	58	58	56
		in.lb	425	425	425	496	496	513	496	425	513	496	513	513	496
Max. acceleration torque ^{a)} (max. 1000 cycles per hour)	T_{2B}	Nm	30	30	30	35	35	40	35	30	40	35	40	40	35
		in.lb	266	266	266	310	310	354	310	266	354	310	354	354	310
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	75	75	75	75	75	75	75	75	75	75	75	75	75
		in.lb	664	664	664	664	664	664	664	664	664	664	664	664	664
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)	n_{1N}	rpm	3300	3300	3300	3300	3300	3300	3300	3300	3300	3300	3300	3300	3300
Max. input speed	n_{1Max}	rpm	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000
Mean no load running torque ^{b)} (at $n_1=3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	0.63	0.63	0.63	0.63	0.63	0.63	0.63	0.63	0.63	0.63	0.63	0.63	0.63
		in.lb	5.6	5.6	5.6	5.6	5.6	5.6	5.6	5.6	5.6	5.6	5.6	5.6	5.6
Max. backlash	j_t	arcmin	≤ 17												
Torsional rigidity ^{b)}	C_{t21}	Nm/arcmin	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1
		in.lb/arcmin	19	19	19	19	19	19	19	19	19	19	19	19	19
Max. axial force ^{c)}	F_{2AMax}	N	750												
		lb _f	169												
Max. lateral force ^{c)}	F_{2QMMax}	N	500												
		lb _f	113												
Max. tilting moment	M_{2KMax}	Nm	17												
		in.lb	150												
Efficiency at full load	η	%	94												
Service life	L_n	h	> 20000												
Weight (incl. standard adapter plate)	m	kg	1.8												
		lb _m	4												
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 70												
Max. permitted housing temperature		°C	+90												
		°F	+194												
Ambient temperature		°C	0 to +40												
		°F	+32 to +104												
Lubrication			Lubricated for life												
Direction of rotation			In- and output same direction												
Protection class			IP 64												
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0020BA014.000-X												
Bore diameter of coupling on the application side		mm	X = 008.000 - 025.000												
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	C 14	J_t	kgcm ²	0.31	0.31	0.31	0.31	0.31	0.31	0.31	0.31	0.31	0.31	0.31	0.31
			10 ⁻³ in.lb.s ²	0.27	0.27	0.27	0.27	0.27	0.27	0.27	0.27	0.27	0.27	0.27	0.27

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com
Please consider the maximum permissible tilting moment caused by the motor M_{1KMot} – see sizing

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange



^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft

Motor shaft diameter [mm]

3-stage


up to 14⁴⁾ (C)⁵⁾
clamping hub
diameter

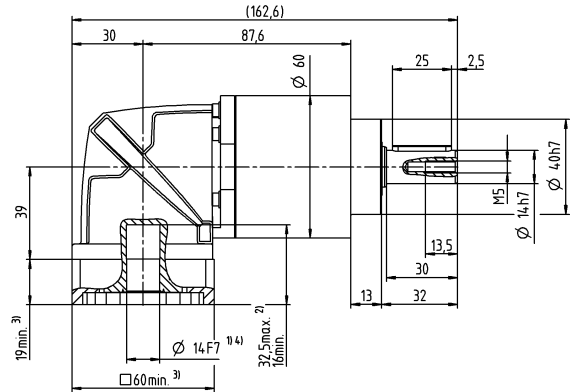


Bevel Gearboxes
Basic Line

Other output variants

Smooth shaft



Replaceable B5 output flange

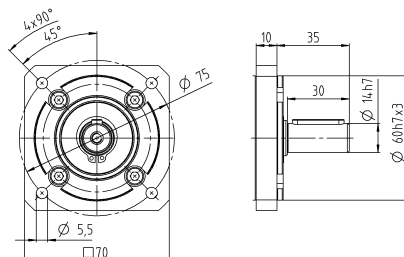

Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated

by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

CPSK 025 MF 2-stage

			2-stage					
Ratio	i		3	4	5	7	8	10
Max. torque ^{a) b) e)}	T_{2a}	Nm	60	80	100	140	144	144
		in.lb	531	708	885	1239	1275	1275
Max. acceleration torque ^{b)} (max. 1000 cycles per hour)	T_{2B}	Nm	35	47	58	82	90	90
		in.lb	310	416	513	726	797	797
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	90	120	150	187	187	187
		in.lb	797	1062	1328	1655	1655	1655
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)	n_{1N}	rpm	3000	3000	3000	3000	3000	3000
Max. input speed	n_{1Max}	rpm	5000	5000	5000	5000	5000	5000
Mean no load running torque ^{b)} (at $n_1=3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	0.98	0.98	0.98	0.98	0.98	0.98
		in.lb	8.7	8.7	8.7	8.7	8.7	8.7
Max. backlash	j_t	arcmin	≤ 17					
Torsional rigidity ^{b)}	C_{t21}	Nm/arcmin	4.5	4.5	4.5	4.5	4.5	4.5
		in.lb/arcmin	40	40	40	40	40	40
Max. axial force ^{c)}	F_{2AMax}	N	1600					
		lb _f	360					
Max. lateral force ^{c)}	F_{2QMax}	N	1200					
		lb _f	270					
Max. tilting moment	M_{2KMax}	Nm	54					
		in.lb	478					
Efficiency at full load	η	%	95					
Service life	L_h	h	> 20000					
Weight (incl. standard adapter plate)	m	kg	4.2					
		lb _m	9.3					
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 73					
Max. permitted housing temperature		°C	+90					
		°F	+194					
Ambient temperature		°C	0 to +40					
		°F	+32 to +104					
Lubrication			Lubricated for life					
Direction of rotation			In- and output same direction					
Protection class			IP 64					
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0060BA020.000-X					
Bore diameter of coupling on the application side		mm	X = 012.000 - 032.000					
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	E 19	J_1	kgcm ²	0.86	0.86	0.86	0.86	0.86
			10 ⁻³ in.lb.s ²	0.76	0.76	0.76	0.76	0.76

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com
Please consider the maximum permissible tilting moment caused by the motor M_{1KMot} – see sizing

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter


^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft


Motor shaft diameter [mm]

up to 19⁴⁾ (E)⁵⁾
clamping hub
diameter

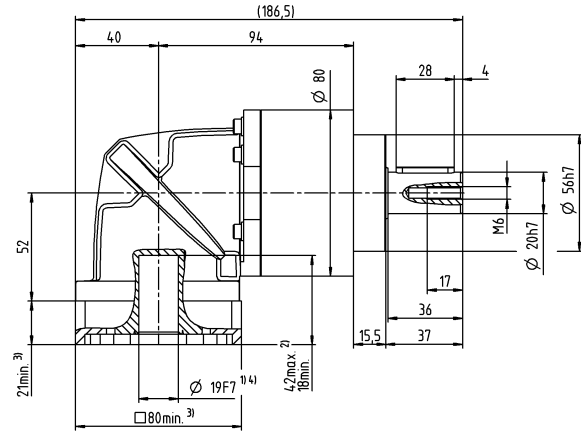

Other output variants

Replaceable B5 output flange

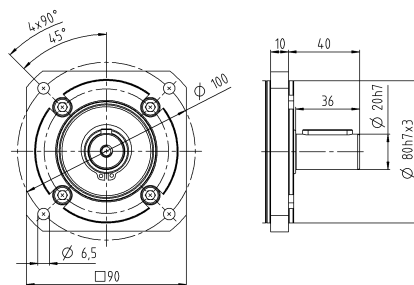

79

CPSK 025 MF 3-stage

			3-stage												
Ratio	i		9	12	15	16	20	25	28	30	35	40	50	70	100
Max. torque ^{a) b) e)}	T_{2a}	Nm	112	112	112	150	150	150	150	112	150	150	150	150	144
		in.lb	991	991	991	1328	1328	1328	1328	991	1328	1328	1328	1328	1275
Max. acceleration torque ^{a)} (max. 1000 cycles per hour)	T_{2B}	Nm	70	70	70	95	95	95	95	70	100	95	100	100	90
		in.lb	620	620	620	841	841	841	841	620	885	841	885	885	797
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	187	187	187	187	187	187	187	187	187	187	187	187	187
		in.lb	1655	1655	1655	1655	1655	1655	1655	1655	1655	1655	1655	1655	1655
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)	n_{1N}	rpm	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000
Max. input speed	n_{1Max}	rpm	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000
Mean no load running torque ^{b)} (at $n_1=3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1
		in.lb	9.7	9.7	9.7	9.7	9.7	9.7	9.7	9.7	9.7	9.7	9.7	9.7	9.7
Max. backlash	j_t	arcmin	≤ 18												
Torsional rigidity ^{b)}	C_{t21}	Nm/arcmin	5.9	5.9	5.9	5.9	5.9	5.9	5.9	5.9	5.9	5.9	5.9	5.9	5.9
		in.lb/arcmin	52	52	52	52	52	52	52	52	52	52	52	52	52
Max. axial force ^{c)}	F_{2AMax}	N	1600												
		lb _f	360												
Max. lateral force ^{c)}	F_{2QMax}	N	1200												
		lb _f	270												
Max. tilting moment	M_{2KMax}	Nm	54												
		in.lb	478												
Efficiency at full load	η	%	94												
Service life	L_h	h	> 20000												
Weight (incl. standard adapter plate)	m	kg	4.5												
		lb _m	9.9												
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 73												
Max. permitted housing temperature		°C	+90												
		°F	+194												
Ambient temperature		°C	0 to +40												
		°F	+32 to +104												
Lubrication			Lubricated for life												
Direction of rotation			In- and output same direction												
Protection class			IP 64												
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0060BA020.000-X												
Bore diameter of coupling on the application side		mm	X = 012.000 - 032.000												
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	E 19	J_1	kgcm ²	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
			10 ⁻³ in.lb.s ²	0.81	0.81	0.81	0.81	0.81	0.81	0.81	0.81	0.81	0.81	0.81	0.81

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com
Please consider the maximum permissible tilting moment caused by the motor M_{1KMot} – see sizing

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange



^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft

Motor shaft diameter [mm]

3-stage


up to 19⁴⁾ (E)⁵⁾
clamping hub
diameter

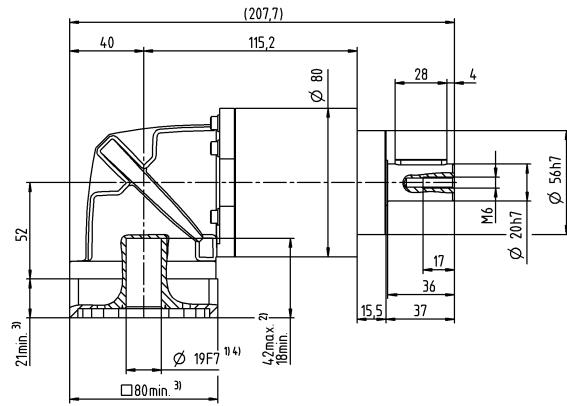


Bevel Gearboxes
Basic Line

Other output variants

Smooth shaft



Replaceable B5 output flange

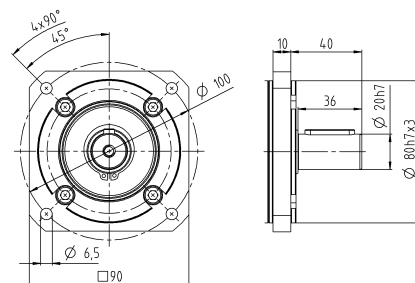

Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

CPSK 035 MF 2-stage

			2-stage					
Ratio	i		3	4	5	7	8	10
Max. torque ^{a) b) e)}	T_{2a}	Nm	150	200	250	272	272	272
		in.lb	1328	1770	2213	2407	2407	2407
Max. acceleration torque ^{b)} (max. 1000 cycles per hour)	T_{2B}	Nm	93	124	155	217	220	220
		in.lb	823	1097	1372	1921	1947	1947
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	238	318	397	480	477	480
		in.lb	2106	2815	3514	4248	4222	4248
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)	n_{1N}	rpm	2000	2000	2000	2000	2000	2000
Max. input speed	n_{1Max}	rpm	4500	4500	4500	4500	4500	4500
Mean no load running torque ^{b)} (at $n_1=3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	3.5	3.5	3.5	3.5	3.5	3.5
		in.lb	31	31	31	31	31	31
Max. backlash	j_t	arcmin	≤ 15					
Torsional rigidity ^{b)}	C_{t21}	Nm/arcmin	13	13	13	13	13	13
		in.lb/arcmin	115	115	115	115	115	115
Max. axial force ^{c)}	F_{2AMax}	N	2500					
		lb _f	563					
Max. lateral force ^{c)}	F_{2QMax}	N	1750					
		lb _f	394					
Max. tilting moment	M_{2KMax}	Nm	98					
		in.lb	867					
Efficiency at full load	η	%	95					
Service life	L_h	h	> 20000					
Weight (incl. standard adapter plate)	m	kg	8.8					
		lb _m	19					
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 74					
Max. permitted housing temperature		°C	+90					
		°F	+194					
Ambient temperature		°C	0 to +40					
		°F	+32 to +104					
Lubrication			Lubricated for life					
Direction of rotation			In- and output same direction					
Protection class			IP 64					
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0150BA025.000-X					
Bore diameter of coupling on the application side		mm	X = 019.000 - 036.000					
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	H 28	J_1	kgcm ²	6.1	6.1	6.1	6.1	6.1
			10 ⁻³ in.lb.s ²	5.4	5.4	5.4	5.4	5.4

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com
Please consider the maximum permissible tilting moment caused by the motor M_{1KMot} – see sizing

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange



^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft

Motor shaft diameter [mm]

2-stage


up to 28⁴⁾ (H)⁵⁾
clamping hub
diameter

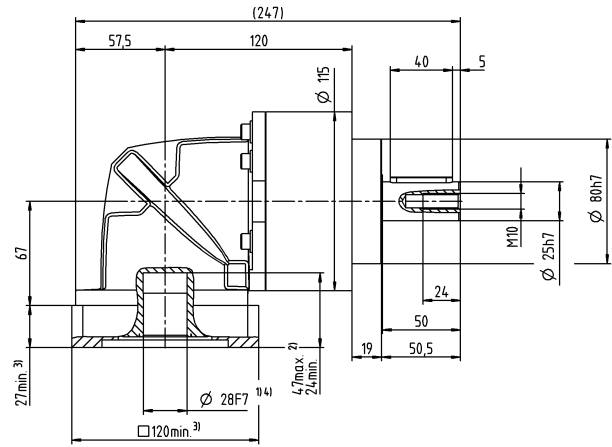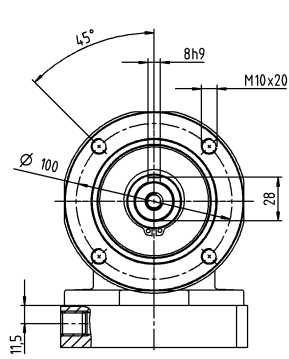


Bevel Gearboxes
Basic Line

Other output variants

Smooth shaft



Replaceable B5 output flange

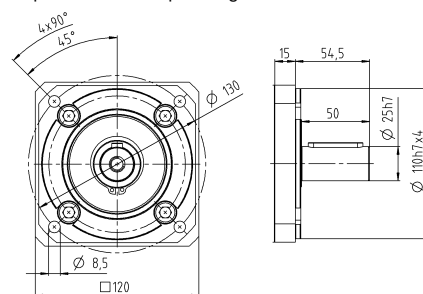

Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated

by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

CPSK 035 MF 3-stage

			3-stage												
Ratio	i		9	12	15	16	20	25	28	30	35	40	50	70	100
Max. torque ^{a) b) e)}	T_{2a}	Nm	272	272	272	272	272	272	272	272	272	272	272	272	272
		in.lb	2407	2407	2407	2407	2407	2407	2407	2407	2407	2407	2407	2407	2407
Max. acceleration torque ^{a)} (max. 1000 cycles per hour)	T_{2B}	Nm	175	175	175	255	255	250	255	175	250	255	250	250	220
		in.lb	1549	1549	1549	2257	2257	2213	2257	1549	2213	2257	2213	2213	1947
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	480	480	480	480	480	480	480	315	480	480	480	480	480
		in.lb	4248	4248	4248	4248	4248	4248	4248	2788	4248	4248	4248	4248	4248
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)	n_{1N}	rpm	2000	2000	2000	2000	2000	2000	2000	2000	2000	2000	2000	2000	2000
Max. input speed	n_{1Max}	rpm	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500
Mean no load running torque ^{b)} (at $n_1=3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8
		in.lb	34	34	34	34	34	34	34	34	34	34	34	34	34
Max. backlash	j_t	arcmin	≤ 17												
Torsional rigidity ^{b)}	C_{t21}	Nm/arcmin	16	16	16	16	16	16	16	16	16	16	16	16	16
		in.lb/arcmin	142	142	142	142	142	142	142	142	142	142	142	142	142
Max. axial force ^{c)}	F_{2AMax}	N	2500												
		lb _f	563												
Max. lateral force ^{c)}	F_{2QMMax}	N	1750												
		lb _f	394												
Max. tilting moment	M_{2KMMax}	Nm	98												
		in.lb	867												
Efficiency at full load	η	%	94												
Service life	L_h	h	> 20000												
Weight (incl. standard adapter plate)	m	kg	10												
		lb _m	22												
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 74												
Max. permitted housing temperature		°C	+90												
		°F	+194												
Ambient temperature		°C	0 to +40												
		°F	+32 to +104												
Lubrication			Lubricated for life												
Direction of rotation			In- and output same direction												
Protection class			IP 64												
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0150BA025.000-X												
Bore diameter of coupling on the application side		mm	X = 019.000 - 036.000												
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	H 28	J_1	kgcm ²	6.3	6.3	6.3	6.3	6.3	6.3	6.3	6.3	6.3	6.3	6.3	6.3
			10 ⁻³ in.lb.s ²	5.6	5.6	5.6	5.6	5.6	5.6	5.6	5.6	5.6	5.6	5.6	5.6



Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com
Please consider the maximum permissible tilting moment caused by the motor M_{1KMot} – see sizing

- ^{a)} Valid for torque transmission only
- ^{b)} Valid for standard clamping hub diameter
- ^{c)} Refers to center of the output shaft or flange
- ^{d)} Please reduce input speed at higher ambient temperatures
- ^{e)} Valid for: Smooth shaft

Motor shaft diameter [mm]

3-stage


up to 28⁴⁾ (H)⁵⁾
clamping hub
diameter

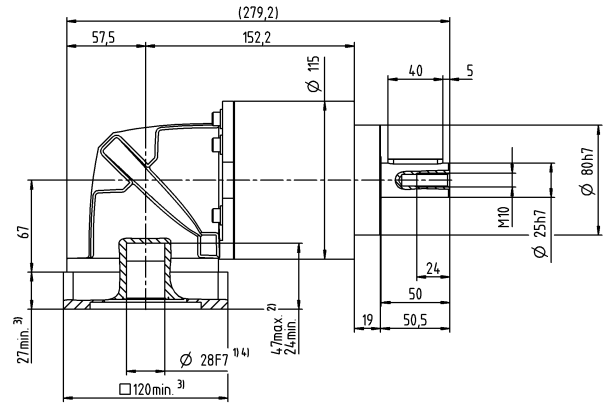


Bevel Gearboxes
Basic Line

Other output variants

Smooth shaft



Replaceable B5 output flange

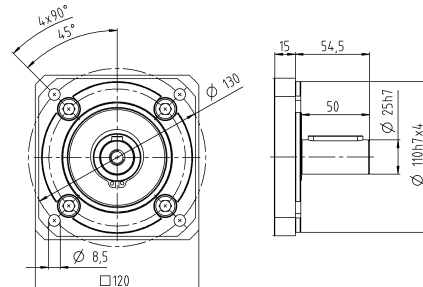

Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor


⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter


alpha Basic Line

WORM GEARBOXES CVH / CVS


If the focus is on smooth running, smooth synchronization properties, and continuous operation, the V-Drive Basic is the right choice for you.

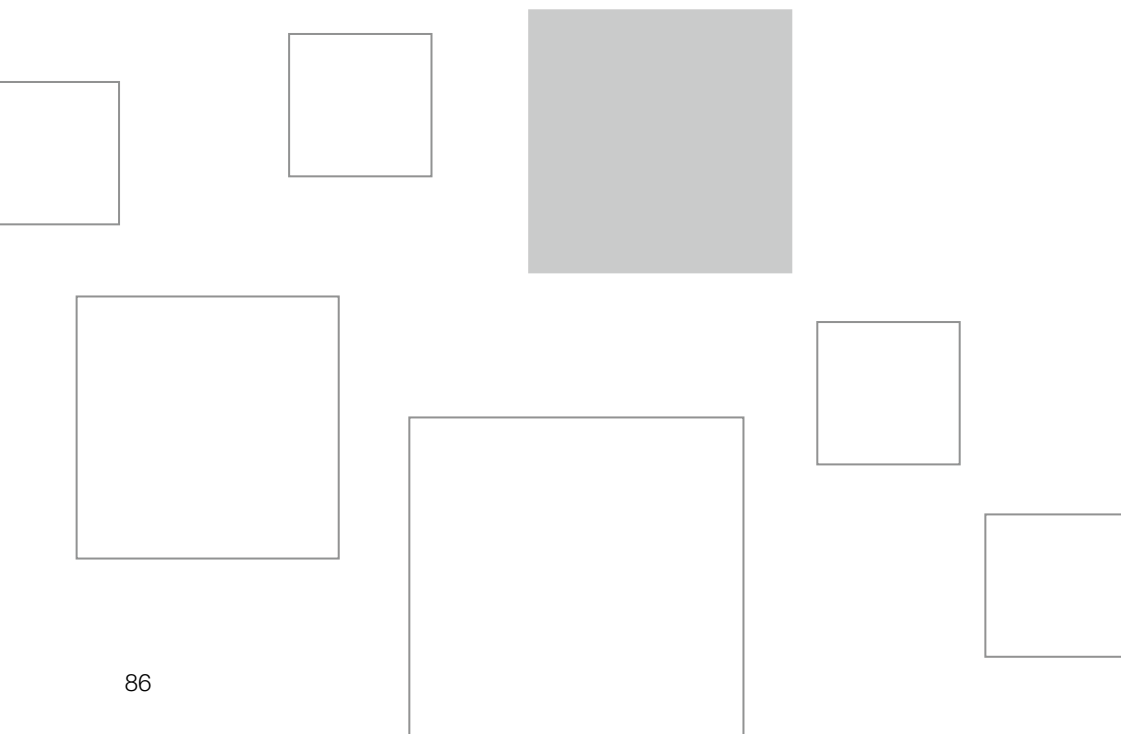

CVH

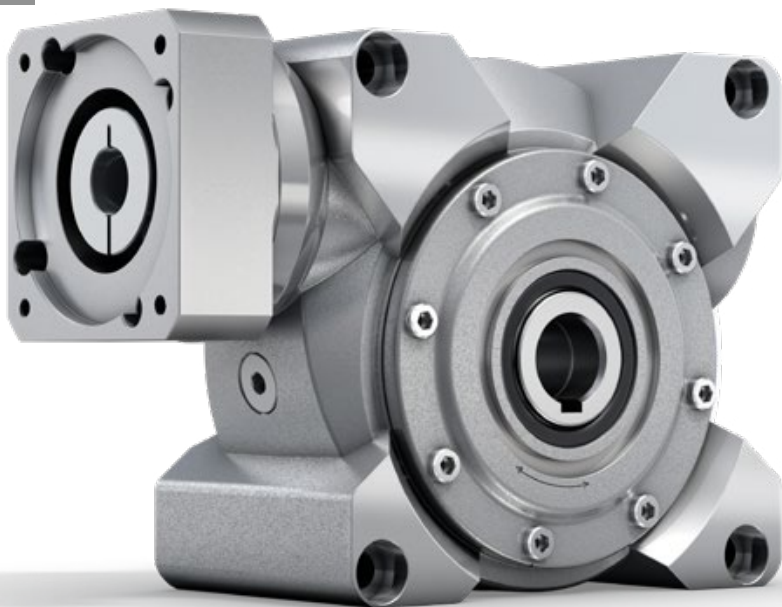

CVS

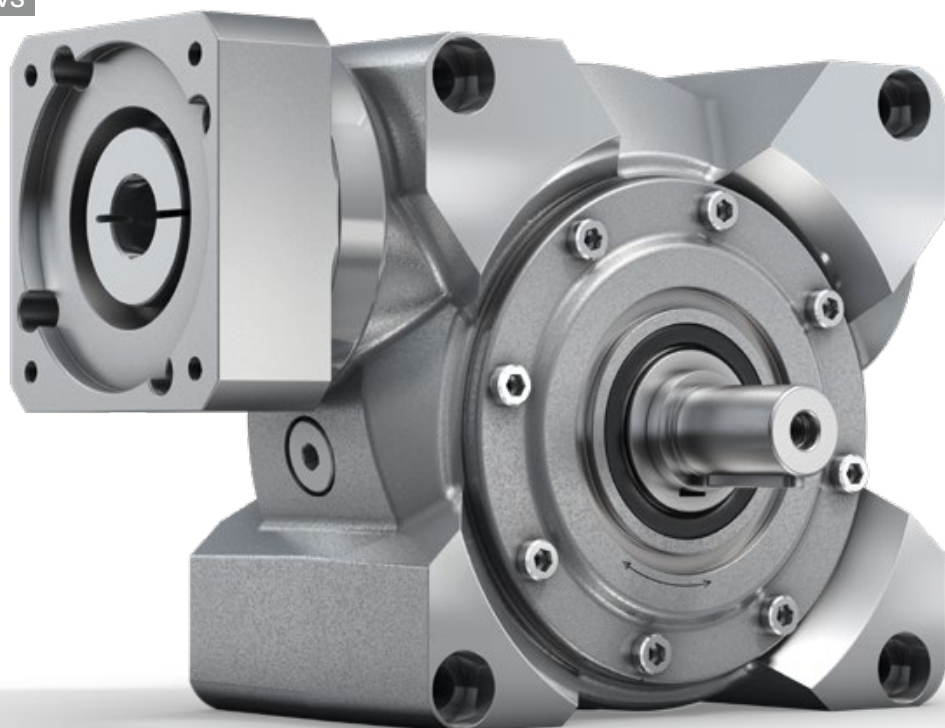


alpha Basic Line in action

COMPACT AND HIGH-PERFORMANCE WORM GEARBOX in electronics production

When developing our customer's new rotary converter series, we had to meet three main objectives: offer the ability to dynamically adapt the conversion rate, minimize the cycle times, and improve the positioning accuracy.

With the V-Drive Basic by WITTENSTEIN alpha, the decision was made in favor of a high-performance servo worm gearbox which can be perfectly integrated into the system thanks to its compact design form.


This is made possible by a newly developed involute gearing of the worm gear set, which delivers a significant improvement in positioning and repetition accuracy with increased efficiency and very good running characteristics compared to the other converters. This provides a reduction in cycle times and therefore an increase in throughput performance in the application for feeding workpiece carriers or masks into various assembly, production, and inspection processes.

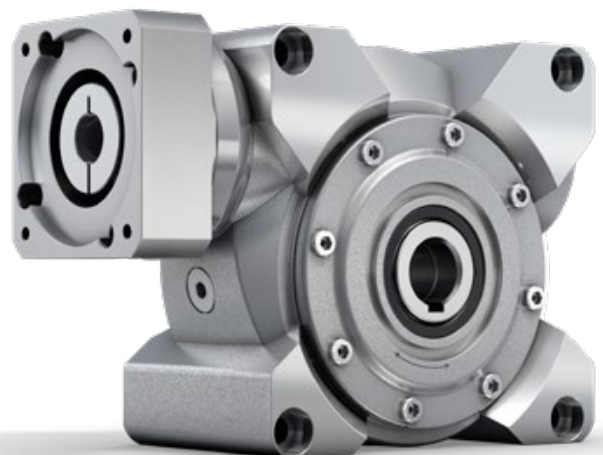



CVH / CVS – We drive the Performance

CVH

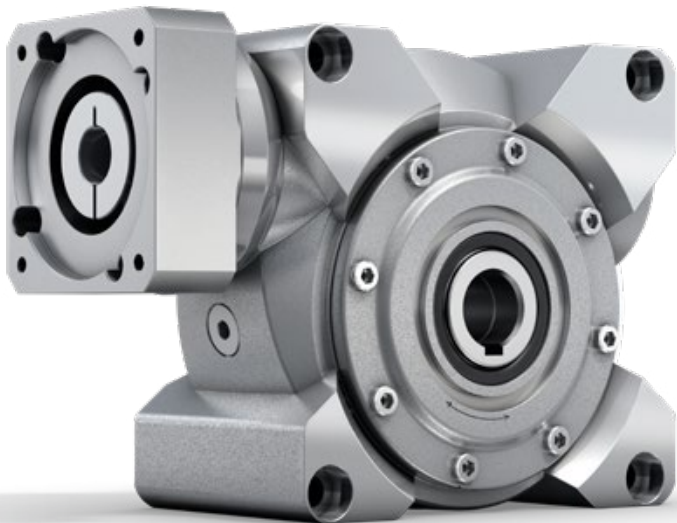

The V-Drive Basic is characterized by a specially developed toothing that minimizes operating noise during S1 operation and offers enormous power. And all with a top price/performance ratio.

PRODUCT HIGHLIGHTS



Optimized output bearings

The V-Drive Basic features an optimized output bearing tailored to the most diverse areas of application. For increased requirements for the absorption of external forces, the reinforced bearing option is used.




Specially developed toothing

The operating noise during S1 operation has been minimized by means of a specially developed toothing featuring high torques, good synchronization, and very low operating noise.




Top price/performance ratio

A top price/performance ratio is achieved with short delivery times and "made in Germany" quality.



CVS – worm gearbox with pinion




CVS – worm gearbox with elastomer coupling



SIZING ASSISTANT
YOUR GEARBOX WITHIN SECONDS

Efficient gearbox sizing within seconds –
online without login
www.sizing-assistant.com

CVS

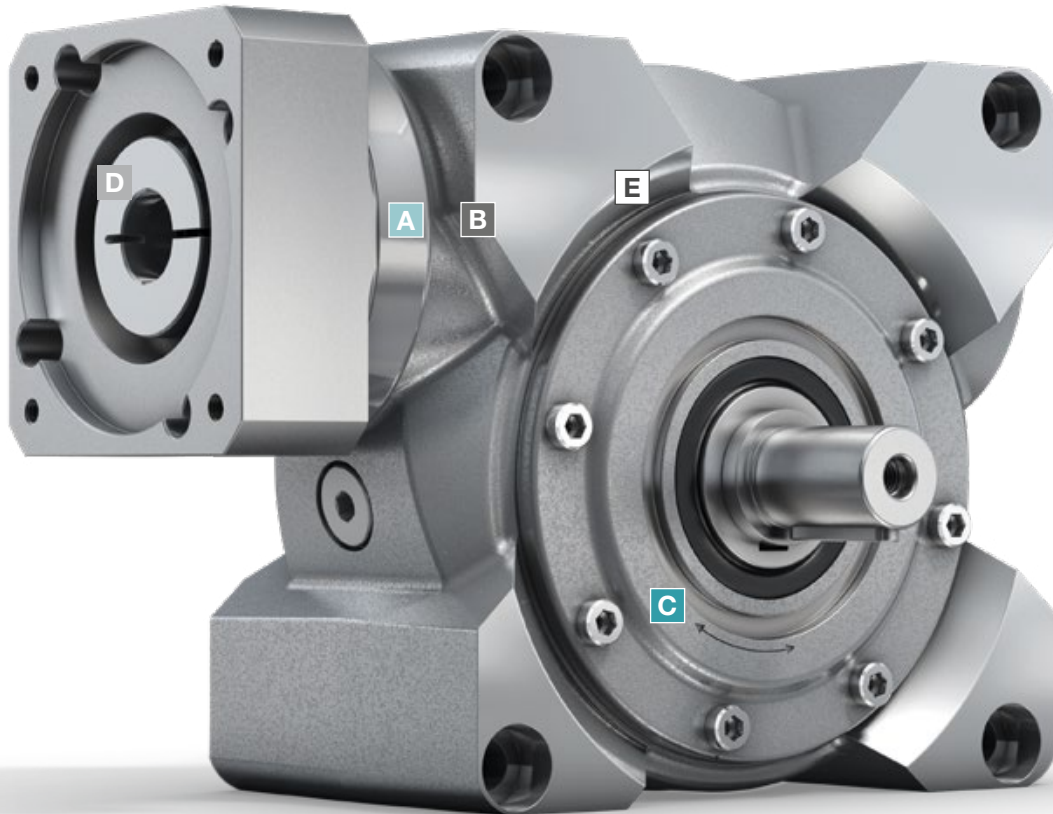

- A Radial shaft seal**
- Very long service life
 - Optimized for continuous operation

- B Input bearing**
- Bearing package to absorb axial and radial forces
 - Very well suited to high input speeds

- C Output bearing**
- Tailored to the most diverse areas of application

- D Metal bellows coupling**
- Completely backlash free
 - Lifetime durable and maintenance free
 - Easy assembly
 - Protects the motor through thermal linear expansion compensation

- E Tothing**
- Specially developed tothing, for high torques, good synchronization, and low operating noise

CVH 040 MF 1-stage

				1-stage					
Ratio	<i>i</i>		7	10	16	28	40		
Max. torque ^{a) b)} (at n ₁ = 500 rpm)	<i>T</i> _{2a}	Nm	68	76	78	82	76		
		in.lb	602	673	690	726	673		
Emergency stop torque ^{a) b)} (permitted 1000 times during the service life of the gearbox)	<i>T</i> _{2Not}	Nm	126	125	129	134	122		
		in.lb	1115	1106	1142	1186	1080		
Permitted average input speed ^{d)} (at 20 °C ambient temperature)	<i>n</i> _{1N}	rpm	4000						
Max. input speed	<i>n</i> _{1Max}	rpm	6000						
Mean no load running torque ^{b)} (at n ₁ = 3000 rpm and 20 °C gearbox temperature)	<i>T</i> ₀₁₂	Nm	0.7	0.6	0.5	0.4	0.4		
		in.lb	6.2	5.3	4.4	3.5	3.5		
Max. backlash	<i>j</i> _t	arcmin	≤ 15						
Torsional rigidity ^{b)}	<i>C</i> _{t21}	Nm/arcmin	3.5	3.5	3.5	3.5	3.5		
		in.lb/arcmin	31	31	31	31	31		
Max. axial force ^{c)} (Standard / HIGH FORCES)	<i>F</i> _{2AMax}	N	1200 / 3000						
		lb _f	270 / 675						
Max. lateral force ^{b)} (Standard / HIGH FORCES)	<i>F</i> _{2QMax}	N	1000 / 2400						
		lb _f	225 / 540						
Max. tilting moment (Standard / HIGH FORCES)	<i>M</i> _{2KMax}	Nm	97 / 205						
		in.lb	858 / 1814						
Efficiency at full load (at n ₁ = 500 rpm)	<i>η</i>	%	89	87	81	72	66		
Service life	<i>L</i> _h	h	> 15000						
Weight (incl. standard adapter plate)	<i>m</i>	kg	4.5						
		lb _m	10						
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	<i>L</i> _{PA}	dB(A)	≤ 54						
Max. permitted housing temperature		°C	+90						
		°F	+194						
Ambient temperature		°C	–15 to +40						
		°F	+5 to +104						
Lubrication			Lubricated for life						
Direction of rotation			See drawing						
Protection class			IP 65						
Shrink disc (Standard Version)			SD 024x050 S2						
Max. torque (without axial force)	<i>T</i> _{max}	Nm	250						
		in.lb	2213						
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	C	14	<i>J</i> _I	kgcm ²	0.38	0.38	0.34	0.32	0.31
				10 ⁻³ in.lb.s ²	0.34	0.34	0.30	0.28	0.27
	E	19	<i>J</i> _I	kgcm ²	0.40	0.37	0.35	0.34	0.33
				10 ⁻³ in.lb.s ²	0.35	0.33	0.31	0.30	0.29

Please use our sizing software cymex[®] for a detailed sizing – www.wittenstein-cymex.com

^{a)} At max. 10 % F_{2QMax}

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures

Motor shaft diameter [mm]


1-stage

up to 14/19 ⁴⁾ (C ⁶⁾/E)
clamping hub
diameter

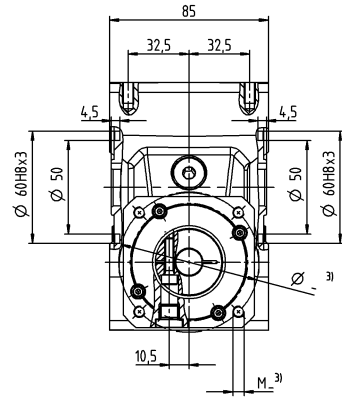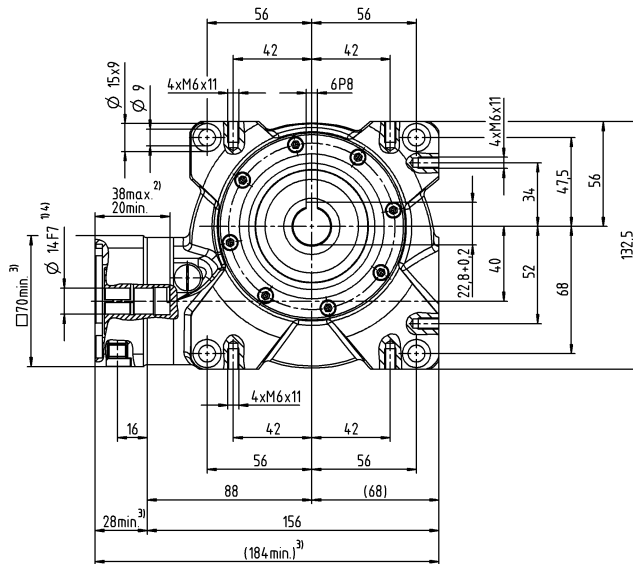

Other output variants

Hollow shaft interfaces on both sides

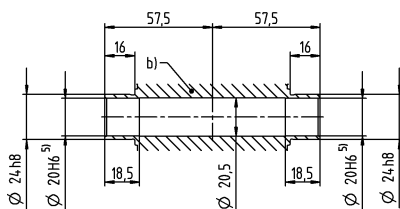

- a) Hollow shaft, keyed on both sides
- b) Hollow shaft interfaces on both sides
- c) End disc for screw M6 (on request)
- d) End disc as forcing washer for screw M8 (on request)
- e) Locking ring – DIN 472 (on request)

See technical data sheet for available clamping hub diameters (mass moment of inertia). Dimensions available on request.

Non-tolerated dimensions are nominal dimensions

- ¹⁾ Check motor shaft fit
- ²⁾ Min./Max. permissible motor shaft length
Longer motor shafts are adaptable, please contact us
- ³⁾ The dimensions depend on the motor
- ⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm
- ⁵⁾ Tolerance h6 for mounted shaft
- ⁶⁾ Standard clamping hub diameter

CVH 050 MF 1- stage

			1-stage				
Ratio	i		7	10	16	28	40
Max. torque ^{a) b)} (at $n_1 = 500$ rpm)	T_{2a}	Nm	125	127	131	140	116
		in.lb	1106	1124	1159	1239	1027
Emergency stop torque ^{a) b)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	242	242	250	262	236
		in.lb	2142	2142	2213	2319	2089
Permitted average input speed ^{d)} (at 20 °C ambient temperature)	n_{1N}	rpm	4000				
Max. input speed	n_{1Max}	rpm	6000				
Mean no load running torque ^{b)} (at $n_1 = 3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	2.2	1.6	1.5	1.2	1.1
		in.lb	19.5	14.2	13.3	10.6	9.7
Max. backlash	j_t	arcmin	≤ 15				
Torsional rigidity ^{b)}	C_{t21}	Nm/arcmin	5.5	5.5	5.5	5.5	5.5
		in.lb/arcmin	49	49	49	49	49
Max. axial force ^{c)} (Standard / HIGH FORCES)	F_{2AMax}	N	1500 / 5000				
		lb _f	337.5 / 1125				
Max. lateral force ^{b)} (Standard / HIGH FORCES)	F_{2QMax}	N	1200 / 3800				
		lb _f	270 / 855				
Max. tilting moment (Standard / HIGH FORCES)	M_{2KMax}	Nm	130 / 409				
		in.lb	1150 / 3620				
Efficiency at full load (at $n_1 = 500$ rpm)	η	%	89	85	80	70	63
Service life	L_h	h	> 15000				
Weight (incl. standard adapter plate)	m	kg	8				
		lb _m	18				
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 62				
Max. permitted housing temperature		°C	+90				
		°F	+194				
Ambient temperature		°C	-15 to +40				
		°F	+5 to +104				
Lubrication			Lubricated for life				
Direction of rotation			See drawing				
Protection class			IP 65				
Shrink disc (Standard Version)			SD 030x060 S2V				
Max. torque (without axial force)	T_{max}	Nm	550				
		in.lb	4868				
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	E 19 J_1	kgcm ²	1.22	1.17	1.06	1.05	1.01
		10 ⁻³ in.lb.s ²	1.08	1.04	0.94	0.93	0.89

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} At max. 10 % F_{2QMax}

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures

Motor shaft diameter [mm]


1-stage

up to 19 ⁴⁾ (E) ⁶⁾
clamping hub
diameter

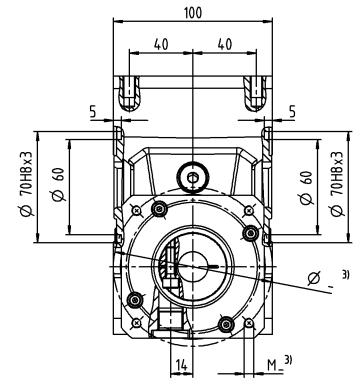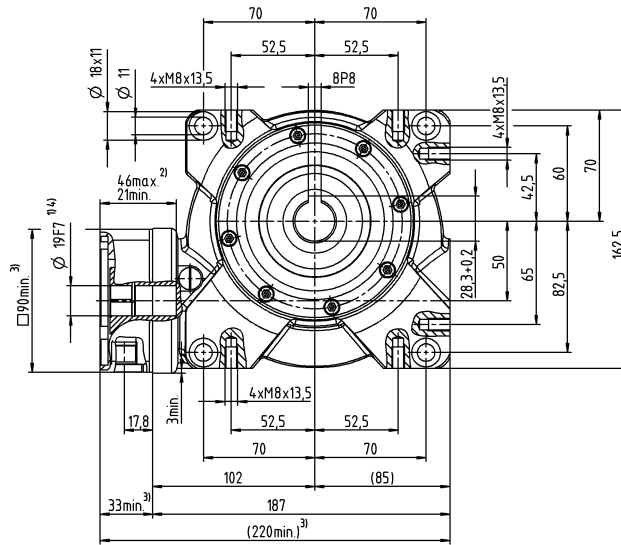

Other output variants

Hollow shaft interfaces on both sides

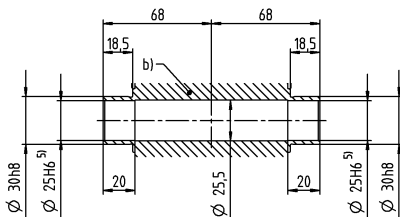

- a) Hollow shaft, keyed on both sides
- b) Hollow shaft interfaces on both sides
- c) End disc for screw M10 (on request)
- d) End disc as forcing washer for screw M12 (on request)
- e) Locking ring – DIN 472 (on request)

See technical data sheet for available clamping hub diameters (mass moment of inertia). Dimensions available on request.

Non-tolerated dimensions are nominal dimensions

- ¹⁾ Check motor shaft fit
- ²⁾ Min./Max. permissible motor shaft length
Longer motor shafts are adaptable, please contact us
- ³⁾ The dimensions depend on the motor
- ⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm
- ⁵⁾ Tolerance h6 for mounted shaft
- ⁶⁾ Standard clamping hub diameter

CVH 063 MF 1- stage

			1-stage				
Ratio	<i>i</i>		7	10	16	28	40
Max. torque ^{a) b)} (at $n_1 = 500$ rpm)	T_{2a}	Nm	265	270	280	301	282
		in.lb	2345	2390	2478	2664	2496
Emergency stop torque ^{a) b)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	484	491	494	518	447
		in.lb	4283	4345	4372	4584	3956
Permitted average input speed ^{d)} (at 20 °C ambient temperature)	n_{1N}	rpm	4000				
Max. input speed	n_{1Max}	rpm	4500				
Mean no load running torque ^{b)} (at $n_1 = 3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	3.1	3	2.4	2.3	2.2
		in.lb	27.4	26.6	21.2	20.4	19.5
Max. backlash	j_t	arcmin	≤ 15				
Torsional rigidity ^{b)}	C_{t21}	Nm/arcmin	23	23	23	23	23
		in.lb/arcmin	204	204	204	204	204
Max. axial force ^{c)} (Standard / HIGH FORCES)	F_{2AMax}	N	2000 / 8250				
		lb _f	450 / 1856				
Max. lateral force ^{b)} (Standard / HIGH FORCES)	F_{2QMax}	N	2000 / 6000				
		lb _f	450 / 1350				
Max. tilting moment (Standard / HIGH FORCES)	M_{2KMax}	Nm	281 / 843				
		in.lb	2487 / 7461				
Efficiency at full load (at $n_1 = 500$ rpm)	η	%	90	87	82	73	67
Service life	L_h	h	> 15000				
Weight (incl. standard adapter plate)	m	kg	13				
		lb _m	29				
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 64				
Max. permitted housing temperature		°C	+90				
		°F	+194				
Ambient temperature		°C	-15 to +40				
		°F	+5 to +104				
Lubrication			Lubricated for life				
Direction of rotation			See drawing				
Protection class			IP 65				
Shrink disc (Standard Version)			SD 036x072 S2V				
Max. torque (without axial force)	T_{max}	Nm	640				
		in.lb	5664				
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	H 28 J_1	kgcm ²	3.75	3.61	3.52	3.48	3.36
		10 ⁻³ in.lb.s ²	3.32	3.19	3.12	3.08	2.97

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} At max. 10 % F_{2QMax}

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures

Motor shaft diameter [mm]


1-stage

up to 28 ⁴⁾ (H) ⁶⁾
clamping hub
diameter

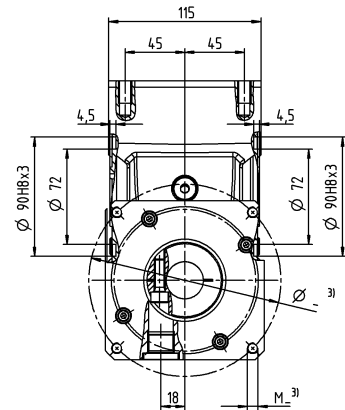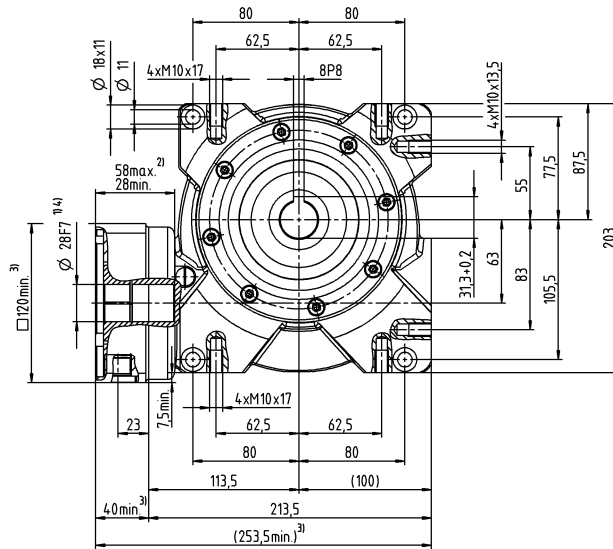

Other output variants

Hollow shaft interfaces on both sides

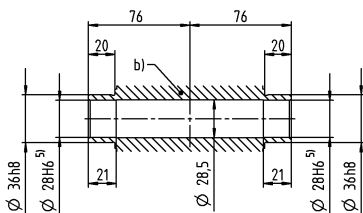

- a) Hollow shaft, keyed on both sides
- b) Hollow shaft interfaces on both sides
- c) End disc for screw M10 (on request)
- d) End disc as forcing washer for screw M12 (on request)
- e) Locking ring – DIN 472 (on request)

See technical data sheet for available clamping hub diameters (mass moment of inertia). Dimensions available on request.

Non-tolerated dimensions are nominal dimensions

- ¹⁾ Check motor shaft fit
- ²⁾ Min./Max. permissible motor shaft length
Longer motor shafts are adaptable, please contact us
- ³⁾ The dimensions depend on the motor
- ⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm
- ⁵⁾ Tolerance h6 for mounted shaft
- ⁶⁾ Standard clamping hub diameter

CVS 040 MF 1-stage

				1-stage				
Ratio	i			7	10	16	28	40
Max. torque ^{a) b) e)} (at $n_1 = 500$ rpm)	T_{2a}	Nm		68	76	78	82	76
		in.lb		602	673	690	726	673
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm		126	125	129	134	122
		in.lb		1115	1106	1142	1186	1080
Permitted average input speed ^{d)} (at 20 °C ambient temperature)	n_{1N}	rpm		4000				
Max. input speed	n_{1Max}	rpm		6000				
Mean no load running torque ^{b)} (at $n_1 = 3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm		0.7	0.6	0.5	0.4	0.4
		in.lb		6.2	5.3	4.4	3.5	3.5
Max. backlash	j_t	arcmin		≤ 15				
Torsional rigidity ^{b)}	C_{t21}	Nm/arcmin		3.5	3.5	3.5	3.5	3.5
		in.lb/arcmin		31	31	31	31	31
Max. axial force ^{c)} (Standard / HIGH FORCES)	F_{2AMax}	N		1200 / 3000				
		lb _f		270 / 675				
Max. lateral force ^{b)} (Standard / HIGH FORCES)	F_{2QMax}	N		1000 / 2400				
		lb _f		225 / 540				
Max. tilting moment (Standard / HIGH FORCES)	M_{2KMax}	Nm		97 / 205				
		in.lb		858 / 1814				
Efficiency at full load (at $n_1 = 500$ rpm)	η	%		89	87	81	72	66
Service life	L_h	h		> 15000				
Weight (incl. standard adapter plate)	m	kg		4.5				
		lb _m		10				
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)		≤ 54				
Max. permitted housing temperature		°C		+90				
		°F		+194				
Ambient temperature		°C		-15 to +40				
		°F		+5 to +104				
Lubrication				Lubricated for life				
Direction of rotation				See drawing				
Protection class				IP 65				
Elastomer coupling (recommended product type – validate sizing with cymex®)				ELC - 00060B - 016.000 - X				
Bore diameter of coupling on the application side		mm		X = 016.000 - 032.000				
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	C	14	J_1	kgcm ²	0.38	0.38	0.34	0.32
				10 ⁻³ in.lb.s ²	0.34	0.34	0.30	0.28
	E	19	J_1	kgcm ²	0.40	0.37	0.35	0.34
				10 ⁻³ in.lb.s ²	0.35	0.33	0.31	0.30

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} At max. 10 % F_{2QMax}

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange



^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft

Motor shaft diameter [mm]



1-stage

up to 14/19 ⁴⁾ (C ⁶⁾/E)
clamping hub
diameter

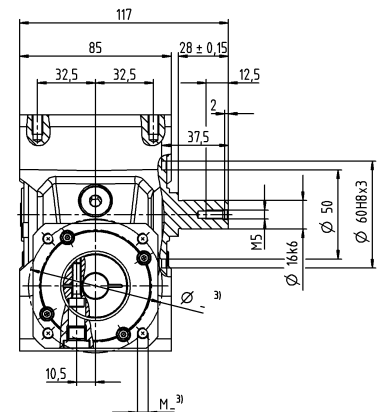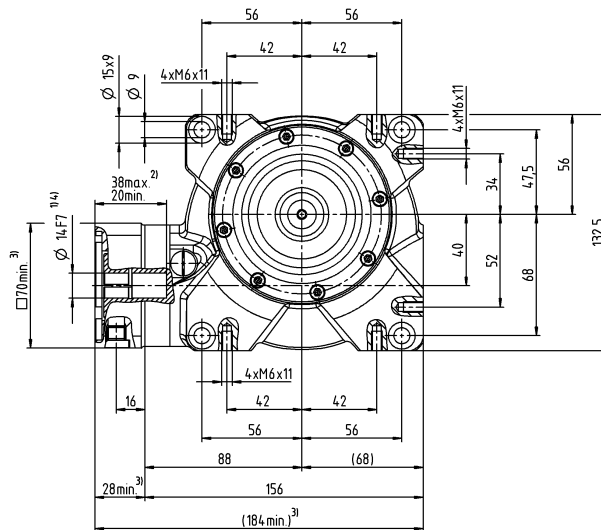

A ⁵⁾

B ⁵⁾

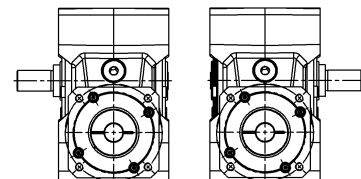


Worm Gearboxes
Basic Line

Optional dual-shaft output. Drawings available on request.
Involute gearing is not possible.

Other output variants

Shaft with key



See technical data sheet for available clamping hub diameters
(mass moment of inertia). Dimensions available on request.

Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min./Max. permissible motor shaft length

Longer motor shafts are adaptable, please contact us

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a
bushing with a minimum thickness of 1 mm

⁵⁾ Output side

⁶⁾ Standard clamping hub diameter

CVS 050 MF 1-stage

				1-stage				
Ratio	i		7	10	16	28	40	
Max. torque ^{a) b) e)} (at n_1 = 500 rpm)	T_{2a}	Nm	125	127	131	140	116	
		in.lb	1106	1124	1159	1239	1027	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	242	242	250	262	236	
		in.lb	2142	2142	2213	2319	2089	
Permitted average input speed ^{d)} (at 20 °C ambient temperature)	n_{1N}	rpm	4000					
Max. input speed	n_{1Max}	rpm	6000					
Mean no load running torque ^{b)} (at n_1 = 3000 rpm and 20 °C gearbox temperature)	T_{012}	Nm	2.2	1.6	1.5	1.2	1.1	
		in.lb	19.5	14.2	13.3	10.6	9.7	
Max. backlash	j_t	arcmin	≤ 15					
Torsional rigidity ^{b)}	C_{t21}	Nm/arcmin	5.5	5.5	5.5	5.5	5.5	
		in.lb/arcmin	49	49	49	49	49	
Max. axial force ^{c)} (Standard / HIGH FORCES)	F_{2AMax}	N	1500 / 5000					
		lb _f	337.5 / 1125					
Max. lateral force ^{b)} (Standard / HIGH FORCES)	F_{2QMax}	N	1200 / 3800					
		lb _f	270 / 855					
Max. tilting moment (Standard / HIGH FORCES)	M_{2KMMax}	Nm	130 / 409					
		in.lb	1150 / 3620					
Efficiency at full load (at n_1 = 500 rpm)	η	%	89	85	80	70	63	
Service life	L_h	h	> 15000					
Weight (incl. standard adapter plate)	m	kg	8					
		lb _m	18					
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 62					
Max. permitted housing temperature		°C	+90					
		°F	+194					
Ambient temperature		°C	–15 to +40					
		°F	+5 to +104					
Lubrication			Lubricated for life					
Direction of rotation			See drawing					
Protection class			IP 65					
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC - 00150B - 022.000 - X					
Bore diameter of coupling on the application side		mm	X = 022.000 - 036.000					
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	E 19	J_i	kgcm ²	1.22	1.17	1.06	1.05	1.01
			10 ⁻³ in.lb.s ²	1.08	1.04	0.94	0.93	0.89

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} At max. 10 % F_{2QMax}

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange




^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft

Motor shaft diameter [mm]

1-stage


up to 19⁴⁾ (E)⁶⁾
clamping hub
diameter

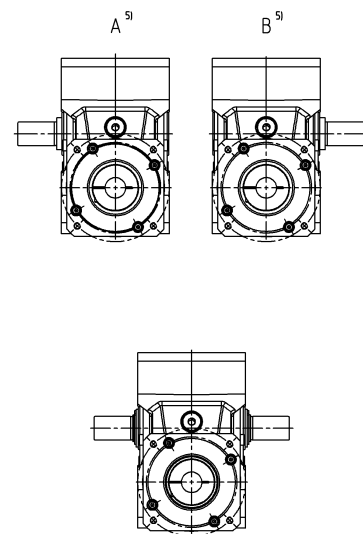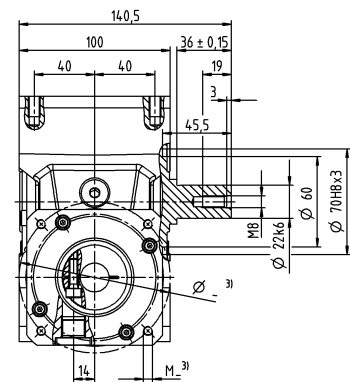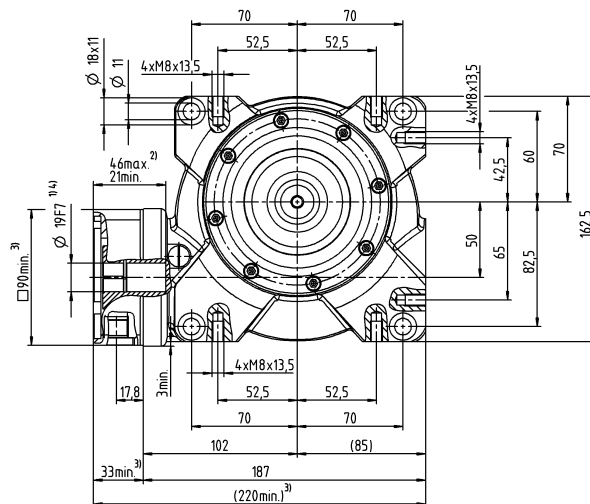

Optional dual-shaft output. Drawings available on request.
Involute gearing is not possible.

Other output variants

Shaft with key



See technical data sheet for available clamping hub diameters
(mass moment of inertia). Dimensions available on request.

Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min./Max. permissible motor shaft length

Longer motor shafts are adaptable, please contact us

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a
bushing with a minimum thickness of 1 mm

⁵⁾ Output side

⁶⁾ Standard clamping hub diameter

CVS 063 MF 1-stage

				1-stage				
Ratio	<i>i</i>		7	10	16	28	40	
Max. torque ^{a) b) e)} (at n ₁ = 500 rpm)	<i>T</i> _{2a}	Nm	265	270	280	301	282	
		in.lb	2345	2390	2478	2664	2496	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	<i>T</i> _{2Not}	Nm	484	491	494	518	447	
		in.lb	4283	4345	4372	4584	3956	
Permitted average input speed ^{d)} (at 20 °C ambient temperature)	<i>n</i> _{1N}	rpm	4000					
Max. input speed	<i>n</i> _{1Max}	rpm	4500					
Mean no load running torque ^{b)} (at n ₁ = 3000 rpm and 20 °C gearbox temperature)	<i>T</i> ₀₁₂	Nm	3.1	3	2.4	2.3	2.2	
		in.lb	27.4	26.6	21.2	20.4	19.5	
Max. backlash	<i>j</i> _t	arcmin	≤ 15					
Torsional rigidity ^{b)}	<i>C</i> _{t21}	Nm/arcmin	23	23	23	23	23	
		in.lb/arcmin	204	204	204	204	204	
Max. axial force ^{c)} (Standard / HIGH FORCES)	<i>F</i> _{2AMax}	N	2000 / 8250					
		lb _f	450 / 1856					
Max. lateral force ^{b)} (Standard / HIGH FORCES)	<i>F</i> _{2QMax}	N	2000 / 6000					
		lb _f	450 / 1350					
Max. tilting moment (Standard / HIGH FORCES)	<i>M</i> _{2KMax}	Nm	281 / 843					
		in.lb	2487 / 7461					
Efficiency at full load (at n ₁ = 500 rpm)	<i>η</i>	%	90	87	82	73	67	
Service life	<i>L</i> _h	h	> 15000					
Weight (incl. standard adapter plate)	<i>m</i>	kg	13					
		lb _m	29					
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	<i>L</i> _{PA}	dB(A)	≤ 64					
Max. permitted housing temperature		°C	+90					
		°F	+194					
Ambient temperature		°C	–15 to +40					
		°F	+5 to +104					
Lubrication			Lubricated for life					
Direction of rotation			See drawing					
Protection class			IP 65					
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC - 00150B - 032.000 - X					
Bore diameter of coupling on the application side		mm	X = 032.000 - 036.000					
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	H 28	<i>J</i> _i	kgcm ²	3.75	3.61	3.52	3.48	3.36
			10 ⁻³ in.lb.s ²	3.32	3.19	3.12	3.08	2.97

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} At max. 10 % F_{2QMax}

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange




^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft

Motor shaft diameter [mm]

1-stage

up to 28 ⁴⁾ (H) ⁶⁾
clamping hub
diameter

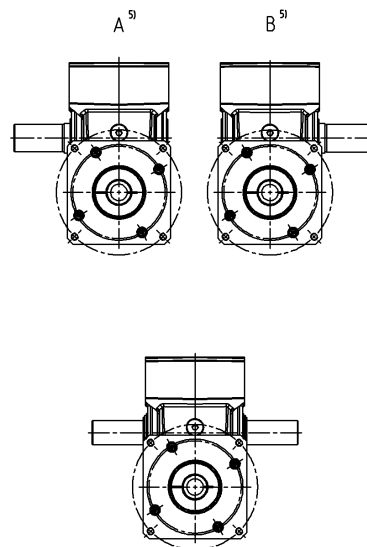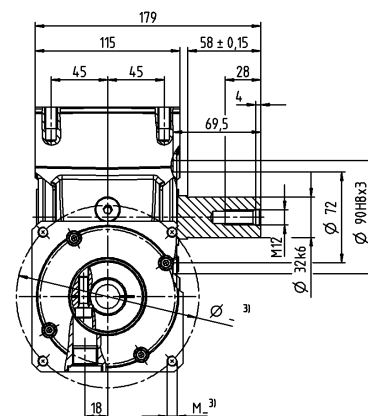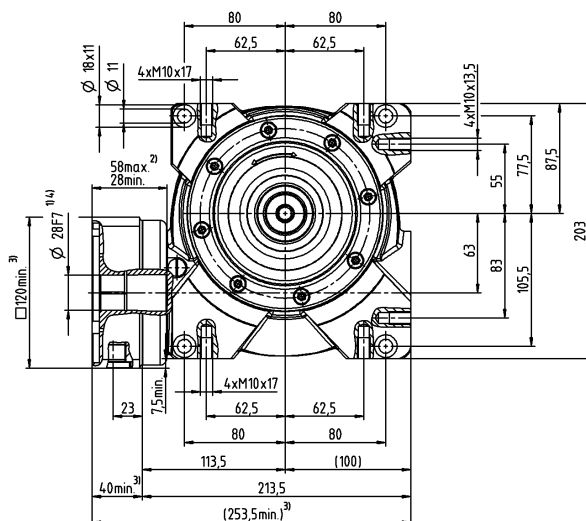



Worm Gearboxes
Basic Line

Optional dual-shaft output. Drawings available on request.
Involute gearing is not possible.

Other output variants

Shaft with key

Shaft with parallel key on both sides

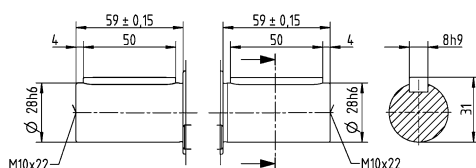

See technical data sheet for available clamping hub diameters
(mass moment of inertia). Dimensions available on request.


Non-tolerated dimensions are nominal dimensions

- ¹⁾ Check motor shaft fit
- ²⁾ Min./Max. permissible motor shaft length
Longer motor shafts are adaptable, please contact us
- ³⁾ The dimensions depend on the motor
- ⁴⁾ Smaller motor shaft diameter is compensated by a
bushing with a minimum thickness of 1 mm
- ⁵⁾ Output side
- ⁶⁾ Standard clamping hub diameter

alpha Value Line

PLANETARY GEARBOXES NP / NPL / NPS / NPT / NPR

The strength of the planetary gearboxes of the alpha Value Line lies in the combination of economy and variety of output variants. Additionally, the gearboxes are suitable for very diverse applications – thanks to the range of ratios and the optimal positioning accuracy.

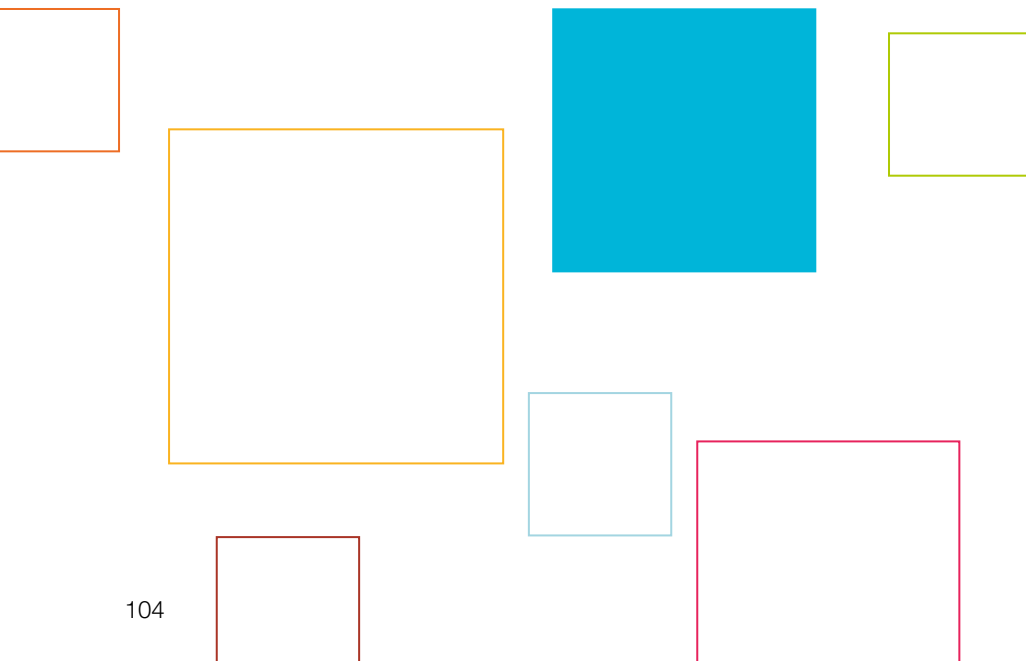

NP



NPL



NPS



NPR



NPT



alpha Value Line in action

INDIVIDUAL TALENTS – for trend-setting research

The planetary gearboxes of the alpha Value Line are suitable for universal application and offer the best economical solution for almost every requirement – on each axis and for all industries.

But the NP servo gearbox is also used outside the typical industrial environment: For research purposes, the planetary gearboxes are used in installations for the simulation of tides or tsunamis as well as for coastline and port basin optimization. With the wave simulators, shipyards or research centers can simulate and investigate the behavior of ships at sea or in a port, in ordinary but also in extreme situations.

The low-backlash NP planetary gearboxes of the alpha Value Line drive axes optimally in installations of multi-servo axes in wave tanks worldwide – for example in Great Britain, the USA, China and Italy.

Each wave simulator has a certain number of paddles for generating very special wave types and frequencies. Depending on the size of the simulator and the type of wave to be simulated – deep and shallow water, sea, current and storm conditions or river mouths – a belt drive, ball screw or rack and pinion drive are used. The size of the individual paddles can vary from a few centimeters to several meters.

Technical support, quality and flexibility were the decisive factors for the decision to cooperate with WITTENSTEIN in the simulation system. The NP gearboxes of the alpha Value Line offer the customer the ideal mix of precision, dynamic performance and price.





NP / NPL / NPS / NPT / NPR

– Individual Talents

NP



The planetary gearboxes of the NP series are universally applicable and offer the best economical solution for almost every requirement, in each axis in every sector. The various drives and output interfaces are offered as a compatible extension to the existing portfolio of WITTENSTEIN alpha – for maximum flexibility in design, assembly, and use.

PRODUCT HIGHLIGHTS



Unique modularity in this segment

With five series including five different output interfaces, the NP series offers maximum flexibility. From a simple machine connection using a B5 or B14 output flange to a flange connection or adjustment via slotted holes – the suitable solution for your machine requirements.



High economy

The gearboxes of the alpha Value Line are very economical to purchase, unbeatably efficient in operation, and maintenance free over their entire service life.



High flexibility

Modular configuration of the interfaces to the motor and to the application. The gearboxes are available with different clamping hub diameters, drive stages, design and mounting options.



Highest power density

The HIGH TORQUE version provides gearboxes with the highest power density.



Fast sizing


Efficient online sizing within seconds in the SIZING ASSISTANT on the basis of the application data or the motor.



NPS – planetary gearbox with SP* output geometry



NPL – planetary gearbox with reinforced bearings and B14 output geometry



NPT – planetary gearbox with TP* output geometry



More information about the alpha Value Line: simply scan the QR code using your smartphone.

<https://alpha.wittenstein.de/en-en/alpha-value-line/>



A Two-piece clamping hub system of the high-end segment

- Labeled with the tightening torques for secure, fast motor mounting
- Guarantees best synchronization properties

B Various output shapes

- Five variants of the NP series available: including with B5 flange mounting, output flange, etc.
- Higher external forces possible with NPL, NPS, and NPR

C High ratio variation

- Large number of ratios ($i=3$ to $i=100$)
- Available in the common binary ratios

D Differentiated power density

- The HIGH TORQUE version permits an even higher torque density for sizes 015 – 035



SIZING ASSISTANT
YOUR GEARBOX WITHIN SECONDS

NP 005 MF 1-stage

				1-stage					
Ratio	i		4	5	7	8	10		
Max. torque ^{a) b) e)}	T_{2a}	Nm	18	22	22	21	21		
		$in.lb$	159	195	195	186	186		
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}	Nm	11	14	14	13	13		
		$in.lb$	97	124	124	115	115		
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	26	26	26	26	26		
		$in.lb$	230	230	230	230	230		
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)	n_{1N}	rpm	3800	4000	4300	4400	4600		
Max. input speed	n_{1Max}	rpm	10000	10000	10000	10000	10000		
Mean no load running torque ^{b)} (at n_1 =3000 rpm and 20 °C gearbox temperature)	T_{012}	Nm	0.1	0.09	0.08	0.08	0.08		
		$in.lb$	0.89	0.8	0.71	0.71	0.71		
Max. backlash	j_t	$arcmin$	≤ 10						
Torsional rigidity ^{b)}	C_{t21}	$Nm/arcmin$	1.2	1.2	1.2	0.85	0.85		
		$in.lb/arcmin$	11	11	11	7.5	7.5		
Max. axial force ^{c)}	F_{2AMax}	N	700						
		lb_f	158						
Max. lateral force ^{c)}	F_{2QMMax}	N	800						
		lb_f	180						
Max. tilting moment	M_{2KMMax}	Nm	23						
		$in.lb$	204						
Efficiency at full load	η	%	97						
Service life	L_h	h	> 20000						
Weight (incl. standard adapter plate)	m	kg	0.7						
		lb_m	1.5						
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	$dB(A)$	≤ 58						
Max. permitted housing temperature		°C	+90						
		°F	+194						
Ambient temperature		°C	–15 to +40						
		°F	+5 to +104						
Lubrication			Lubricated for life						
Direction of rotation			In- and output same direction						
Protection class			IP 64						
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0005BA012.000-X						
Bore diameter of coupling on the application side		mm	X = 004.000 - 012.700						
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	Z	8	J_1	$kgcm^2$	0.03	0.03	0.03	0.02	0.02
				$10^{-3} in.lb.s^2$	0.03	0.03	0.03	0.02	0.02
	A	9	J_1	$kgcm^2$	0.03	0.03	0.03	0.03	0.02
				$10^{-3} in.lb.s^2$	0.03	0.03	0.03	0.03	0.02
	B	11	J_1	$kgcm^2$	0.05	0.05	0.04	0.04	0.04
				$10^{-3} in.lb.s^2$	0.04	0.04	0.04	0.04	0.04
C	14	J_1	$kgcm^2$	0.14	0.13	0.13	0.13	0.13	
			$10^{-3} in.lb.s^2$	0.12	0.12	0.12	0.12	0.12	

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Valid for: Smooth shaft

1-stage

up to 11⁴⁾ (B)⁵⁾
clamping hub
diameter

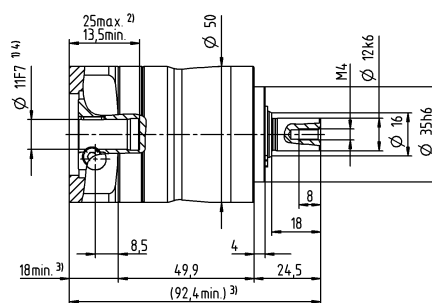

up to 14⁴⁾ (C)
clamping hub
diameter

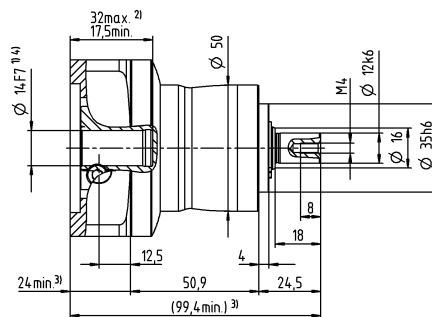


Motor shaft diameter [mm]

Planetary Gearboxes
Value Line

Other output variants

Shaft with key



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NP 005 MF 2-stage

			2-stage									
Ratio	i		16	20	25	28	35	40	50	64	70	100
Max. torque ^{a) b) e)}	T_{2a}	Nm	18	18	22	18	22	18	22	21	22	21
		in.lb	159	159	195	159	195	159	195	186	195	186
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}	Nm	11	11	14	11	14	11	14	13	14	13
		in.lb	97	97	124	97	124	97	124	115	124	115
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	26	26	26	26	26	26	26	26	26	26
		in.lb	230	230	230	230	230	230	230	230	230	230
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}	rpm	4000	4000	4000	4300	4300	4600	4600	4400	4600	4600
Max. input speed	n_{1Max}	rpm	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000
Mean no load running torque ^{b)} (at n_1 = 3000 rpm and 20 °C gearbox temperature)	T_{012}	Nm	0.11	0.1	0.1	0.09	0.09	0.08	0.08	0.08	0.08	0.08
		in.lb	0.97	0.89	0.89	0.8	0.8	0.71	0.71	0.71	0.71	0.71
Max. backlash	j_t	arcmin	≤ 13									
Torsional rigidity ^{b)}	C_{t21}	Nm/arcmin	1.2	1.2	1.2	1.2	1.2	1.2	1.2	0.85	1.2	0.85
		in.lb/arcmin	11	11	11	11	11	11	11	7.5	11	7.5
Max. axial force ^{c)}	F_{2AMax}	N	700									
		lb _f	158									
Max. lateral force ^{c)}	F_{2QMMax}	N	800									
		lb _f	180									
Max. tilting moment	M_{2KMMax}	Nm	23									
		in.lb	204									
Efficiency at full load	η	%	95									
Service life	L_h	h	> 20000									
Weight (incl. standard adapter plate)	m	kg	0.9									
		lb _m	2									
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 58									
Max. permitted housing temperature		°C	+90									
		°F	+194									
Ambient temperature		°C	-15 to +40									
		°F	+5 to +104									
Lubrication			Lubricated for life									
Direction of rotation			In- and output same direction									
Protection class			IP 64									
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0005BA012.000-X									
Bore diameter of coupling on the application side		mm	X = 004.000 - 012.700									
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	Z	8	J_1	kgcm ²	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02
				10 ⁻³ in.lb.s ²	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02
	A	9	J_1	kgcm ²	0.03	0.03	0.02	0.03	0.03	0.02	0.02	0.02
				10 ⁻³ in.lb.s ²	0.03	0.03	0.02	0.03	0.03	0.02	0.02	0.02
	B	11	J_1	kgcm ²	0.05	0.05	0.04	0.05	0.04	0.04	0.04	0.04
				10 ⁻³ in.lb.s ²	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04
	C	14	J_1	kgcm ²	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13
				10 ⁻³ in.lb.s ²	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Valid for: Smooth shaft

2-stage

up to 11⁴⁾ (B)⁵⁾
clamping hub
diameter

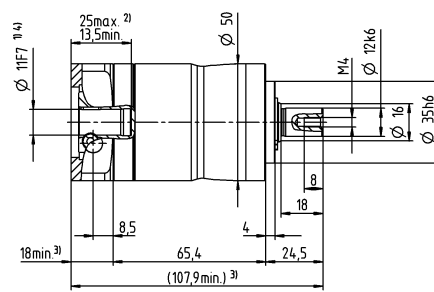

up to 14⁴⁾ (C)
clamping hub
diameter

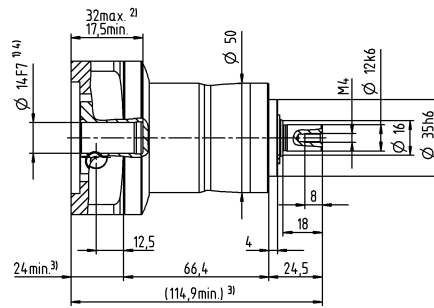


Motor shaft diameter [mm]

Planetary Gearboxes
Value Line

Other output variants

Shaft with key



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NP 015 MF 1-stage

				1-stage						
Ratio		i		3	4	5	7	8	10	
Max. torque ^{a) b) e)}		T_{2a}	Nm	51	56	64	64	56	56	
			$in.lb$	451	496	566	566	496	496	
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)		T_{2B}	Nm	32	35	40	40	35	35	
			$in.lb$	283	310	354	354	310	310	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)		T_{2Not}	Nm	80	80	80	80	80	80	
			$in.lb$	708	708	708	708	708	708	
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)		n_{1N}	rpm	3300	3500	3700	4000	4100	4300	
Max. input speed		n_{1Max}	rpm	8000	8000	8000	8000	8000	8000	
Mean no load running torque ^{b)} (at n_1 = 3000 rpm and 20 °C gearbox temperature)		T_{012}	Nm	0.24	0.2	0.17	0.14	0.13	0.12	
			$in.lb$	2.1	1.8	1.5	1.2	1.2	1.1	
Max. backlash		j_t	$arcmin$	≤ 8						
Torsional rigidity ^{b)}		C_{t21}	$Nm/arcmin$	3.3	3.3	3.3	3.3	2.8	2.8	
			$in.lb/arcmin$	29	29	29	29	25	25	
Max. axial force ^{c)}		F_{2AMax}	N	1550						
			lb_f	349						
Max. lateral force ^{c)}		F_{2QMMax}	N	1700						
			lb_f	383						
Max. tilting moment		M_{2KMMax}	Nm	72						
			$in.lb$	637						
Efficiency at full load		η	%	97						
Service life		L_h	h	> 20000						
Weight (incl. standard adapter plate)		m	kg	1.9						
			lb_m	4.2						
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)		L_{PA}	$dB(A)$	≤ 59						
Max. permitted housing temperature			°C	+90						
			°F	+194						
Ambient temperature			°C	–15 to +40						
			°F	+5 to +104						
Lubrication				Lubricated for life						
Direction of rotation				In- and output same direction						
Protection class				IP 64						
Elastomer coupling (recommended product type – validate sizing with cymex®)				ELC-0060BA016.000-X						
Bore diameter of coupling on the application side			mm	X = 012.000 - 032.000						
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	A	9	J_1	$kgcm^2$	0.22	0.18	0.16	0.14	0.14	0.13
				$10^{-3} in.lb.s^2$	0.19	0.16	0.14	0.12	0.12	0.12
	B	11	J_1	$kgcm^2$	0.24	0.19	0.18	0.16	0.15	0.15
				$10^{-3} in.lb.s^2$	0.21	0.17	0.16	0.14	0.13	0.13
	C	14	J_1	$kgcm^2$	0.32	0.27	0.25	0.23	0.23	0.22
				$10^{-3} in.lb.s^2$	0.28	0.24	0.22	0.2	0.2	0.19
	D	16	J_1	$kgcm^2$	0.45	0.4	0.38	0.36	0.36	0.35
				$10^{-3} in.lb.s^2$	0.4	0.35	0.34	0.32	0.32	0.31
E	19	J_1	$kgcm^2$	0.53	0.48	0.46	0.44	0.44	0.43	
			$10^{-3} in.lb.s^2$	0.47	0.42	0.41	0.39	0.39	0.38	

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Valid for: Smooth shaft

1-stage

up to 14⁴⁾ (C)⁵⁾
clamping hub
diameter

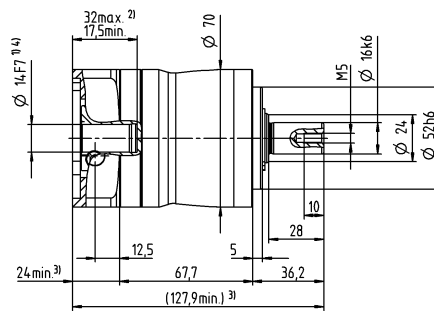

up to 19⁴⁾ (E)
clamping hub
diameter

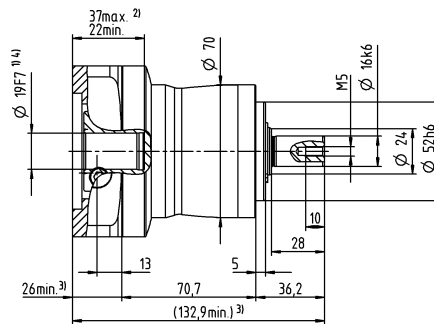


Motor shaft diameter [mm]

Planetary Gearboxes
Value Line

Other output variants

Shaft with key



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NP 015 MF 2-stage

			2-stage													
Ratio	i		12	15	16	20	25	28	30	32	35	40	50	64	70	100
Max. torque ^{a) b) e)}	T_{2a}	Nm	51	51	56	56	64	56	51	56	64	56	64	56	64	56
		in.lb	451	451	496	496	566	496	451	496	566	496	566	496	566	496
Max. acceleration torque ^{a)} (max. 1000 cycles per hour)	T_{2B}	Nm	32	32	35	35	40	35	32	35	40	35	40	35	40	35
		in.lb	283	283	310	310	354	310	283	310	354	310	354	310	354	310
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	80	80	80	80	80	80	80	80	80	80	80	80	80	80
		in.lb	708	708	708	708	708	708	708	708	708	708	708	708	708	708
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}	rpm	3800	4000	3800	4000	4000	4300	4600	4400	4300	4600	4600	4400	4600	4600
Max. input speed	n_{1Max}	rpm	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000
Mean no load running torque ^{b)} (at $n_1=3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	0.13	0.11	0.12	0.11	0.1	0.09	0.09	0.09	0.09	0.08	0.08	0.08	0.08	0.08
		in.lb	1.2	0.97	1.1	0.97	0.89	0.8	0.8	0.8	0.8	0.71	0.71	0.71	0.71	0.71
Max. backlash	j_t	arcmin	≤ 10													
Torsional rigidity ^{b)}	C_{t21}	Nm/arcmin	3.3	3.3	3.3	3.3	3.3	3.3	4	3.3	3.3	3.3	3.3	2.8	3.3	2.8
		in.lb/arcmin	29	29	29	29	29	29	35	29	29	29	29	25	29	25
Max. axial force ^{c)}	F_{2AMax}	N	1550													
		lb _f	349													
Max. lateral force ^{c)}	F_{2QMMax}	N	1700													
		lb _f	383													
Max. tilting moment	M_{2KMMax}	Nm	72													
		in.lb	637													
Efficiency at full load	η	%	95													
Service life	L_h	h	> 20000													
Weight (incl. standard adapter plate)	m	kg	1.9													
		lb _m	4.2													
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex [®])	L_{PA}	dB(A)	≤ 58													
Max. permitted housing temperature		°C	+90													
		°F	+194													
Ambient temperature		°C	-15 to +40													
		°F	+5 to +104													
Lubrication			Lubricated for life													
Direction of rotation			In- and output same direction													
Protection class			IP 64													
Elastomer coupling (recommended product type – validate sizing with cymex [®])			ELC-0060BA016.000-X													
Bore diameter of coupling on the application side		mm	X = 012.000 - 032.000													
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	Z	8	J_1	kgcm ²	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02
				10 ⁻³ in.lb.s ²	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02
	A	9	J_1	kgcm ²	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02
				10 ⁻³ in.lb.s ²	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02
	B	11	J_1	kgcm ²	0.06	0.05	0.05	0.05	0.05	0.05	0.05	0.04	0.05	0.04	0.04	0.04
				10 ⁻³ in.lb.s ²	0.05	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04
	C	14	J_1	kgcm ²	0.14	0.14	0.14	0.13	0.13	0.13	0.14	0.13	0.13	0.13	0.13	0.13
				10 ⁻³ in.lb.s ²	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12

Please use our sizing software cymex[®] for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Valid for: Smooth shaft

2-stage

up to 11⁴⁾ (B)⁵⁾
clamping hub
diameter

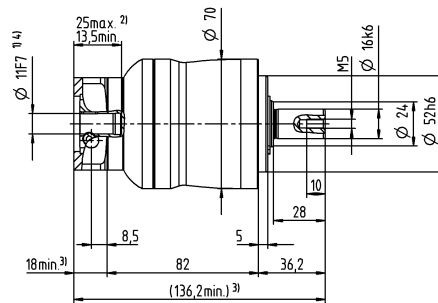

up to 14⁴⁾ (C)
clamping hub
diameter

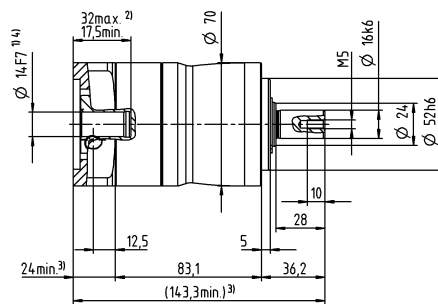


Motor shaft diameter [mm]

Planetary Gearboxes
Value Line

Other output variants

Shaft with key



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NP 025 MF 1-stage

				1-stage						
Ratio	i				3	4	5	7	8	10
Max. torque ^{a) b) e)}	T_{2a}			Nm	128	152	160	160	144	144
				in.lb	1133	1345	1416	1416	1275	1275
Max. acceleration torque ^{a)} (max. 1000 cycles per hour)	T_{2B}			Nm	80	95	100	100	90	90
				in.lb	708	841	885	885	797	797
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}			Nm	190	190	190	190	190	190
				in.lb	1682	1682	1682	1682	1682	1682
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)	n_{1N}			rpm	3100	3300	3400	3600	3700	3900
Max. input speed	n_{1Max}			rpm	7000	7000	7000	7000	7000	7000
Mean no load running torque ^{b)} (at n_1 = 3000 rpm and 20 °C gearbox temperature)	T_{012}			Nm	0.38	0.31	0.26	0.21	0.19	0.17
				in.lb	3.4	2.7	2.3	1.9	1.7	1.5
Max. backlash	j_t			arcmin	≤ 8					
Torsional rigidity ^{b)}	C_{t21}			Nm/arcmin	9.5	9.5	9.5	9.5	8.5	8.5
				in.lb/arcmin	84	84	84	84	75	75
Max. axial force ^{c)}	F_{2AMax}			N	1900					
				lb _f	428					
Max. lateral force ^{c)}	F_{2QMax}			N	2800					
				lb _f	630					
Max. tilting moment	M_{2KMax}			Nm	137					
				in.lb	1213					
Efficiency at full load	η			%	97					
Service life	L_h			h	> 20000					
Weight (incl. standard adapter plate)	m			kg	3.8					
				lb _m	8.4					
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}			dB(A)	≤ 61					
Max. permitted housing temperature				°C	+90					
				°F	+194					
Ambient temperature				°C	–15 to +40					
				°F	+5 to +104					
Lubrication					Lubricated for life					
Direction of rotation					In- and output same direction					
Protection class					IP 64					
Elastomer coupling (recommended product type – validate sizing with cymex®)					ELC-0060BA022.000-X					
Bore diameter of coupling on the application side					mm					
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	C	14	J_1	kgcm ²	0.57	0.46	0.37	0.3	0.27	0.25
				10 ⁻³ in.lb.s ²	0.5	0.41	0.33	0.27	0.24	0.22
	D	16	J_1	kgcm ²	0.71	0.61	0.52	0.43	0.42	0.4
				10 ⁻³ in.lb.s ²	0.63	0.54	0.46	0.38	0.37	0.35
	E	19	J_1	kgcm ²	0.8	0.7	0.61	0.53	0.51	0.49
				10 ⁻³ in.lb.s ²	0.71	0.62	0.54	0.47	0.45	0.43
	G	24	J_1	kgcm ²	1.8	1.7	1.6	1.6	1.5	1.5
				10 ⁻³ in.lb.s ²	1.6	1.5	1.4	1.4	1.3	1.3
	H	28	J_1	kgcm ²	1.5	1.4	1.3	1.3	1.2	1.2
				10 ⁻³ in.lb.s ²	1.3	1.2	1.2	1.2	1.1	1.1

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Valid for: Smooth shaft

1-stage

up to 19⁴⁾ (E)⁵⁾
clamping hub
diameter

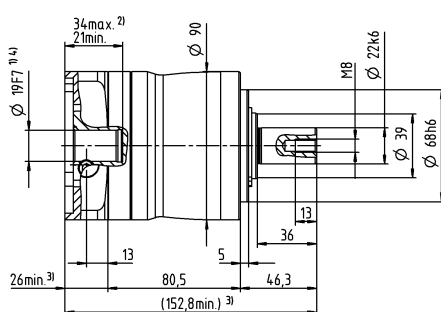

up to 28⁴⁾ (H)
clamping hub
diameter

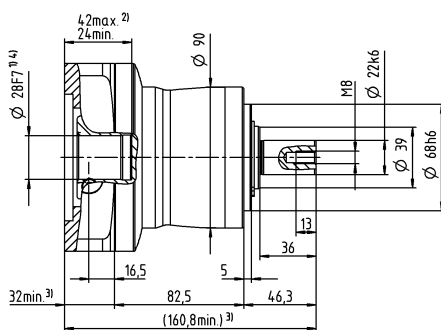


Motor shaft diameter [mm]

Planetary Gearboxes
Value Line

Other output variants

Shaft with key



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NP 025 MF 2-stage

			2-stage														
Ratio	i		9	12	15	16	20	25	28	30	32	35	40	50	64	70	100
Max. torque ^{a) b) e)}	T_{2a}	Nm	128	128	128	152	152	160	152	128	152	160	152	160	144	160	144
		in.lb	1133	1133	1133	1345	1345	1416	1345	1133	1345	1416	1345	1416	1275	1416	1275
Max. acceleration torque ^{a)} (max. 1000 cycles per hour)	T_{2B}	Nm	80	80	80	95	95	100	95	80	95	100	95	100	90	100	90
		in.lb	708	708	708	841	841	885	841	708	841	885	841	885	797	885	797
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	190	190	190	190	190	190	190	190	190	190	190	190	190	190	190
		in.lb	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}	rpm	3300	3500	3700	3500	3700	3700	4000	4300	4100	4000	4300	4300	4100	4300	4300
Max. input speed	n_{1Max}	rpm	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000
Mean no load running torque ^{b)} (at $n_1 = 3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	0.22	0.18	0.16	0.16	0.15	0.14	0.12	0.12	0.12	0.12	0.11	0.1	0.1	0.1	0.09
		in.lb	1.9	1.6	1.4	1.4	1.3	1.2	1.1	1.1	1.1	1.1	0.97	0.89	0.89	0.89	0.8
Max. backlash	j_t	arcmin	≤ 10														
Torsional rigidity ^{b)}	C_{t21}	Nm/arcmin	9.5	9.5	9.5	9.5	9.5	9.5	9.5	9.5	9.5	9.5	9.5	9.5	8.5	9.5	8.5
		in.lb/arcmin	84	84	84	84	84	84	84	84	84	84	84	84	75	84	75
Max. axial force ^{c)}	F_{2AMax}	N	1900														
		lb _f	428														
Max. lateral force ^{c)}	F_{2QMMax}	N	2800														
		lb _f	630														
Max. tilting moment	M_{2KMMax}	Nm	137														
		in.lb	1213														
Efficiency at full load	η	%	95														
Service life	L_h	h	> 20000														
Weight (incl. standard adapter plate)	m	kg	4.1														
		lb _m	9.1														
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 59														
Max. permitted housing temperature		°C	+90														
		°F	+194														
Ambient temperature		°C	-15 to +40														
		°F	+5 to +104														
Lubrication			Lubricated for life														
Direction of rotation			In- and output same direction														
Protection class			IP 64														
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0060BA022.000-X														
Bore diameter of coupling on the application side		mm	X = 012.000 - 032.000														
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	A	9	J_1	kgcm ²	0.26	0.22	0.21	0.21	0.2	0.2	0.19	0.19	0.19	0.19	0.19	0.19	0.19
				10 ⁻³ in.lb.s ²	0.23	0.19	0.19	0.19	0.18	0.18	0.17	0.17	0.17	0.17	0.17	0.17	0.17
	B	11	J_1	kgcm ²	0.28	0.24	0.23	0.23	0.22	0.22	0.21	0.21	0.21	0.21	0.21	0.21	0.21
				10 ⁻³ in.lb.s ²	0.25	0.21	0.2	0.2	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.19
	C	14	J_1	kgcm ²	0.35	0.31	0.3	0.3	0.3	0.29	0.29	0.28	0.28	0.28	0.28	0.28	0.28
				10 ⁻³ in.lb.s ²	0.31	0.27	0.27	0.27	0.27	0.26	0.26	0.25	0.25	0.25	0.25	0.25	0.25
	D	16	J_1	kgcm ²	0.48	0.44	0.43	0.43	0.42	0.42	0.41	0.41	0.41	0.41	0.41	0.41	0.41
				10 ⁻³ in.lb.s ²	0.42	0.39	0.38	0.38	0.37	0.37	0.36	0.36	0.36	0.36	0.36	0.36	0.36
	E	19	J_1	kgcm ²	0.56	0.52	0.51	0.51	0.51	0.5	0.5	0.5	0.5	0.5	0.49	0.49	0.49
				10 ⁻³ in.lb.s ²	0.5	0.46	0.45	0.45	0.45	0.44	0.44	0.44	0.44	0.44	0.43	0.43	0.43

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Valid for: Smooth shaft

2-stage

up to 14⁴⁾ (C)⁵⁾
clamping hub
diameter

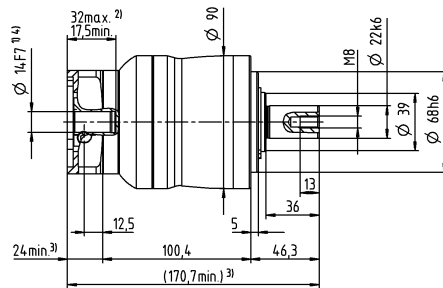


up to 19⁴⁾ (E)
clamping hub
diameter

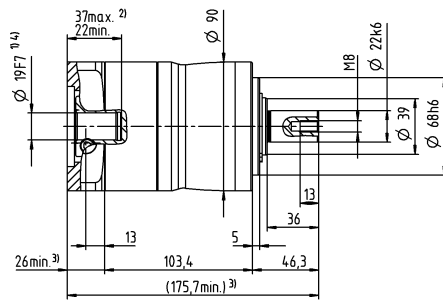

Motor shaft diameter [mm]

Other output variants

Shaft with key



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NP 035 MF 1-stage

				1-stage						
Ratio		i		3	4	5	7	8	10	
Max. torque ^{a) b) e)}		T_{2a}	Nm	320	408	400	400	352	352	
			$in.lb$	2832	3611	3540	3540	3115	3115	
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)		T_{2B}	Nm	200	255	250	250	220	220	
			$in.lb$	1770	2257	2213	2213	1947	1947	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)		T_{2Not}	Nm	500	500	500	500	500	500	
			$in.lb$	4425	4425	4425	4425	4425	4425	
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)		n_{1N}	rpm	2300	2500	2600	2800	2900	3000	
Max. input speed		n_{1Max}	rpm	6000	6000	6000	6000	6000	6000	
Mean no load running torque ^{b)} (at n_1 = 3000 rpm and 20 °C gearbox temperature)		T_{012}	Nm	1	0.85	0.76	0.66	0.63	0.58	
			$in.lb$	8.9	7.5	6.7	5.8	5.6	5.1	
Max. backlash		j_t	$arcmin$	≤ 8						
Torsional rigidity ^{b)}		C_{t21}	$Nm/arcmin$	22	25	25	25	22	22	
			$in.lb/arcmin$	195	221	221	221	195	195	
Max. axial force ^{c)}		F_{2AMax}	N	4000						
			lb_f	900						
Max. lateral force ^{c)}		F_{2QMMax}	N	5000						
			lb_f	1125						
Max. tilting moment		M_{2KMMax}	Nm	345						
			$in.lb$	3054						
Efficiency at full load		η	%	97						
Service life		L_h	h	> 20000						
Weight (incl. standard adapter plate)		m	kg	9.4						
			lb_m	21						
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)		L_{PA}	$dB(A)$	≤ 65						
Max. permitted housing temperature			°C	+90						
			°F	+194						
Ambient temperature			°C	–15 to +40						
			°F	+5 to +104						
Lubrication				Lubricated for life						
Direction of rotation				In- and output same direction						
Protection class				IP 64						
Elastomer coupling (recommended product type – validate sizing with cymex®)				ELC-0150BA032.000-X						
Bore diameter of coupling on the application side			mm	X = 019.000 - 036.000						
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	E	19	J_1	$kgcm^2$	2.6	1.7	1.4	1	1	0.9
				$10^{-3} in.lb.s^2$	2.3	1.5	1.2	0.89	0.89	0.8
	G	24	J_1	$kgcm^2$	3.4	2.5	2.2	1.8	1.7	1.7
				$10^{-3} in.lb.s^2$	3	2.2	1.9	1.6	1.5	1.5
	H	28	J_1	$kgcm^2$	3.1	2.2	1.9	1.5	1.4	1.4
				$10^{-3} in.lb.s^2$	2.7	1.9	1.7	1.3	1.2	1.2
	I	32	J_1	$kgcm^2$	7.2	6.3	5.9	5.6	5.5	5.4
				$10^{-3} in.lb.s^2$	6.4	5.6	5.2	5	4.9	4.8
K	38	J_1	$kgcm^2$	8.3	7.4	7.1	6.8	6.7	6.6	
			$10^{-3} in.lb.s^2$	7.3	6.5	6.3	6	5.9	5.8	

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter


^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures






^{e)} Valid for: Smooth shaft

1-stage

up to 24/28⁴⁾
(G⁵⁾/H)
clamping hub
diameter



up to 38⁴⁾ (K)
clamping hub
diameter

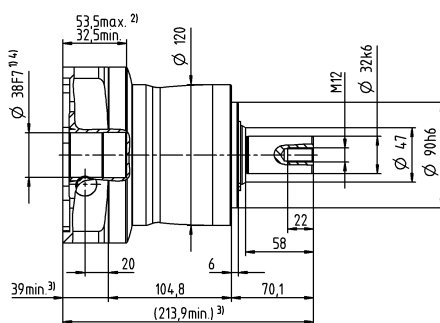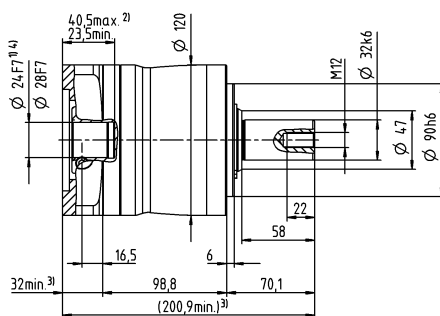


Motor shaft diameter [mm]

Planetary Gearboxes
Value Line

Other output variants

Shaft with key



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NP 035 MF 2-stage

				2-stage															
Ratio	i			9	12	15	16	20	25	28	30	32	35	40	50	64	70	100	
Max. torque ^{a) b) e)}	T_{2a}		Nm	320	320	320	408	408	400	408	320	408	400	408	400	352	400	352	
			in.lb	2832	2832	2832	3611	3611	3540	3611	2832	3611	3540	3611	3540	3115	3540	3115	
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}		Nm	200	200	200	255	255	250	255	200	255	250	255	250	220	250	220	
			in.lb	1770	1770	1770	2257	2257	2213	2257	1770	2257	2213	2257	2213	1947	2213	1947	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}		Nm	500	500	500	500	500	500	500	500	500	500	500	500	500	500	500	
			in.lb	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425	
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)	n_{1N}		rpm	3100	3300	3400	3300	3400	3400	3600	3900	3700	3600	3900	3900	3700	3900	3900	
Max. input speed	n_{1Max}		rpm	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	
Mean no load running torque ^{b)} (at n_1 = 3000 rpm and 20 °C gearbox temperature)	T_{012}		Nm	0.45	0.36	0.3	0.32	0.27	0.25	0.22	0.19	0.2	0.2	0.18	0.17	0.17	0.16	0.15	
			in.lb	4	3.2	2.7	2.8	2.4	2.2	1.9	1.7	1.8	1.8	1.6	1.5	1.5	1.4	1.3	
Max. backlash	j_t		arcmin	≤ 10															
Torsional rigidity ^{b)}	C_{t21}		Nm/arcmin	22	22	22	25	25	25	25	22	25	25	25	25	22	25	22	
			in.lb/arcmin	195	195	195	221	221	221	221	195	221	221	221	221	195	221	195	
Max. axial force ^{c)}	F_{2AMax}		N	4000															
			lb _f	900															
Max. lateral force ^{c)}	F_{2QMMax}		N	5000															
			lb _f	1125															
Max. tilting moment	M_{2KMMax}		Nm	345															
			in.lb	3054															
Efficiency at full load	η		%	95															
Service life	L_h		h	> 20000															
Weight (incl. standard adapter plate)	m		kg	9.8															
			lb _m	22															
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}		dB(A)	≤ 61															
Max. permitted housing temperature			°C	+90															
			°F	+194															
Ambient temperature			°C	–15 to +40															
			°F	+5 to +104															
Lubrication				Lubricated for life															
Direction of rotation				In- and output same direction															
Protection class				IP 64															
Elastomer coupling (recommended product type – validate sizing with cymex®)				ELC-0150BA032.000-X															
Bore diameter of coupling on the application side			mm	X = 019.000 - 036.000															
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	C	14	J_1	kgcm ²	0.61	0.6	0.6	0.43	0.42	0.36	0.37	0.52	0.38	0.32	0.36	0.31	0.26	0.27	0.24
				10 ⁻³ in.lb.s ²	0.54	0.53	0.53	0.38	0.37	0.32	0.33	0.46	0.34	0.28	0.32	0.27	0.23	0.24	0.21
	D	16	J_1	kgcm ²	0.76	0.75	0.75	0.58	0.57	0.5	0.5	0.67	0.52	0.45	0.51	0.46	0.4	0.41	0.39
				10 ⁻³ in.lb.s ²	0.67	0.66	0.66	0.51	0.5	0.44	0.44	0.59	0.46	0.4	0.45	0.41	0.35	0.36	0.35
	E	19	J_1	kgcm ²	0.85	0.83	0.83	0.67	0.66	0.59	0.6	0.75	0.61	0.55	0.6	0.54	0.49	0.5	0.48
				10 ⁻³ in.lb.s ²	0.75	0.73	0.73	0.59	0.58	0.52	0.53	0.66	0.54	0.49	0.53	0.48	0.43	0.44	0.42
	G	24	J_1	kgcm ²	1.9	1.9	1.9	1.7	1.7	1.6	1.6	1.8	1.6	1.6	1.6	1.6	1.5	1.5	1.5
				10 ⁻³ in.lb.s ²	1.7	1.7	1.7	1.5	1.5	1.4	1.4	1.6	1.4	1.4	1.4	1.4	1.3	1.3	1.3
	H	28	J_1	kgcm ²	1.6	1.6	1.6	1.4	1.4	1.3	1.3	1.5	1.4	1.3	1.3	1.3	1.2	1.2	1.2
				10 ⁻³ in.lb.s ²	1.4	1.4	1.4	1.2	1.2	1.2	1.2	1.3	1.2	1.2	1.2	1.2	1.1	1.1	1.1

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Valid for: Smooth shaft

2-stage

up to 19⁴⁾ (E)⁵⁾
clamping hub
diameter

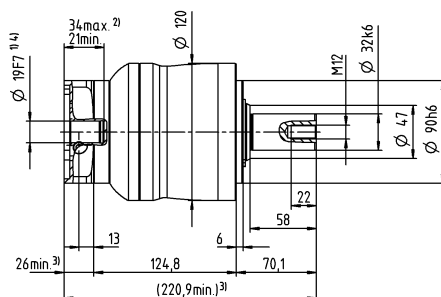

up to 28⁴⁾ (H)
clamping hub
diameter

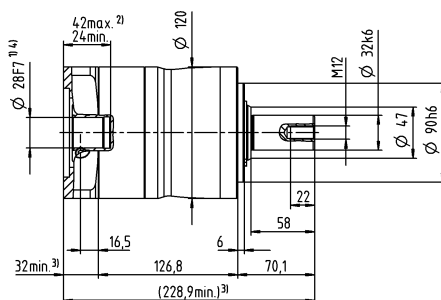


Motor shaft diameter [mm]

Planetary Gearboxes
Value Line

Other output variants

Shaft with key



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NP 045 MF 1- / 2-stage

				1-stage			2-stage					
Ratio	i			5	8	10	25	32	50	64	100	
Max. torque ^{a) b) e)}	T_{2a}		Nm	800	640	640	700	640	700	640	640	
			in.lb	7081	5665	5665	6196	5665	6196	5665	5665	
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}		Nm	500	400	400	500	400	500	400	400	
			in.lb	4425	3540	3540	4425	3540	4425	3540	3540	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}		Nm	1000	1000	1000	1000	1000	1000	1000	1000	
			in.lb	8851	8851	8851	8851	8851	8851	8851	8851	
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)	n_{1N}		rpm	2000	2200	2300	2600	2500	3000	2900	3000	
Max. input speed	n_{1Max}		rpm	4000	4000	4000	6000	6000	6000	6000	6000	
Mean no load running torque ^{b)} (at n_1 =3000 rpm and 20 °C gearbox temperature)	T_{012}		Nm	2.4	2	1.9	0.8	0.68	0.6	0.6	0.55	
			in.lb	21	18	17	7.1	6	5.3	5.3	4.9	
Max. backlash	j_t		arcmin	≤ 8			≤ 10					
Torsional rigidity ^{b)}	C_{t21}		Nm/arcmin	55	44	44	55	55	55	44	44	
			in.lb/arcmin	487	389	389	487	487	487	389	389	
Max. axial force ^{c)}	F_{2AMax}		N	6000			6000					
			lb _f	1350			1350					
Max. lateral force ^{c)}	F_{2QMMax}		N	8000			8000					
			lb _f	1800			1800					
Max. tilting moment	M_{2KMMax}		Nm	704			704					
			in.lb	6231			6231					
Efficiency at full load	η		%	97			95					
Service life	L_h		h	> 20000			> 20000					
Weight (incl. standard adapter plate)	m		kg	19			20					
			lb _m	42			44					
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}		dB(A)	≤ 68			≤ 65					
Max. permitted housing temperature			°C	+90			+90					
			°F	+194			+194					
Ambient temperature			°C	–15 to +40			–15 to +40					
			°F	+5 to +104			+5 to +104					
Lubrication				Lubricated for life								
Direction of rotation				In- and output same direction								
Protection class				IP 64								
Elastomer coupling (recommended product type – validate sizing with cymex®)				ELC-0300BA040.000-X								
Bore diameter of coupling on the application side				mm X = 020.000 - 045.000								
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	E	19	J_1	kgcm ²	–	–	–	1.2	1.1	1.1	0.88	0.82
				10 ⁻³ in.lb.s ²	–	–	–	1.1	0.97	0.97	0.78	0.73
	G	24	J_1	kgcm ²	–	–	–	2	1.9	1.8	1.7	1.6
				10 ⁻³ in.lb.s ²	–	–	–	1.8	1.7	1.6	1.5	1.4
	H	28	J_1	kgcm ²	–	–	–	1.7	1.6	1.5	1.4	1.3
				10 ⁻³ in.lb.s ²	–	–	–	1.5	1.4	1.3	1.2	1.2
	I	32	J_1	kgcm ²	–	–	–	5.8	5.7	5.6	5.4	5.4
				10 ⁻³ in.lb.s ²	–	–	–	5.1	5	5	4.8	4.8
	K	38	J_1	kgcm ²	8.8	7.4	7.2	7	6.9	6.8	6.6	6.5
				10 ⁻³ in.lb.s ²	7.8	6.5	6.4	6.2	6.1	6	5.8	5.8

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft







1-stage

up to 38⁴⁾ (K)⁵⁾
clamping hub
diameter

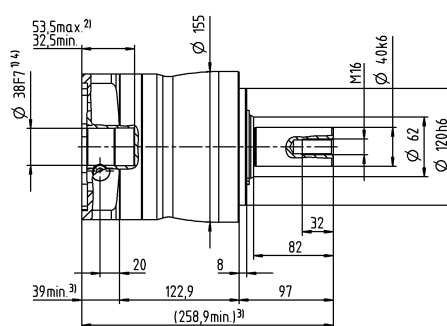

2-stage

up to 28⁴⁾ (H)⁵⁾
clamping hub
diameter

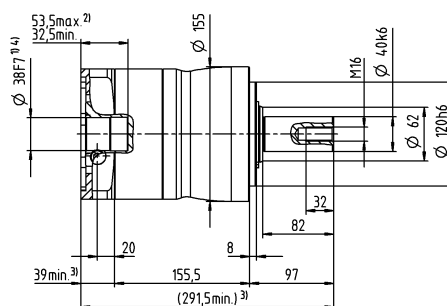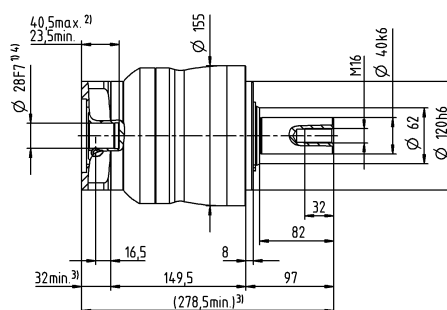


Motor shaft diameter [mm]

up to 38⁴⁾ (K)
clamping hub
diameter

Planetary Gearboxes
Value Line

Other output variants

Shaft with key



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated

by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NP 015 MA 1- / 2-stage

			1-stage		2-stage								
Ratio	i		3	4	12	15	16	20	28	30	40		
Max. torque ^{a) b) e)}	T_{2a}	Nm	80	67	62	67	67	67	67	62	67		
		in.lb	708	593	549	593	593	593	593	549	593		
Max. acceleration torque ^{a)} (max. 1000 cycles per hour)	T_{2B}	Nm	55	42	39	42	42	42	42	39	42		
		in.lb	487	372	345	372	372	372	372	345	372		
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	80	80	80	80	80	80	80	80	80		
		in.lb	708	708	708	708	708	708	708	708	708		
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}	rpm	3300	3500	3800	4000	3800	4000	4300	4600	4600		
Max. input speed	n_{1Max}	rpm	8000	8000	10000	10000	10000	10000	10000	10000	10000		
Mean no load running torque ^{b)} (at n_1 = 3000 rpm and 20 °C gearbox temperature)	T_{012}	Nm	0.24	0.2	0.13	0.11	0.12	0.11	0.09	0.09	0.08		
		in.lb	2.1	1.8	1.2	0.97	1.1	0.97	0.8	0.8	0.71		
Max. backlash	j_t	arcmin	≤ 8		≤ 10								
Torsional rigidity ^{b)}	C_{t21}	Nm/arcmin	4	4	4	4	4	4	4	4	4		
		in.lb/arcmin	35	35	35	35	35	35	35	35	35		
Max. axial force ^{c)}	F_{2AMax}	N	1550		1550								
		lb _f	349		349								
Max. lateral force ^{c)}	F_{2QMax}	N	1700		1700								
		lb _f	383		383								
Max. tilting moment	M_{2KMax}	Nm	72		72								
		in.lb	637		637								
Efficiency at full load	η	%	97		95								
Service life	L_h	h	> 20000		> 20000								
Weight (incl. standard adapter plate)	m	kg	1.9		1.9								
		lb _m	4.2		4.2								
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 59		≤ 58								
Max. permitted housing temperature		°C	+90		+90								
		°F	+194		+194								
Ambient temperature		°C	–15 to +40		–15 to +40								
		°F	+5 to +104		+5 to +104								
Lubrication			Lubricated for life										
Direction of rotation			In- and output same direction										
Protection class			IP 64										
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0060BA016.000-X										
Bore diameter of coupling on the application side		mm	X = 012.000 - 032.000										
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	Z	8	J_1	kgcm ²	–	–	0.04	0.04	0.03	0.03	0.03	0.03	
				10 ⁻³ in.lb.s ²	–	–	0.04	0.04	0.03	0.03	0.03	0.03	0.03
	A	9	J_1	kgcm ²	0.22	0.18	0.04	0.04	0.03	0.03	0.03	0.03	
				10 ⁻³ in.lb.s ²	0.19	0.16	0.04	0.04	0.03	0.03	0.03	0.03	0.03
	B	11	J_1	kgcm ²	0.24	0.19	0.06	0.05	0.05	0.05	0.05	0.05	
				10 ⁻³ in.lb.s ²	0.21	0.17	0.05	0.04	0.04	0.04	0.04	0.04	0.04
	C	14	J_1	kgcm ²	0.32	0.27	0.14	0.14	0.14	0.13	0.13	0.14	
				10 ⁻³ in.lb.s ²	0.28	0.24	0.12	0.12	0.12	0.12	0.12	0.12	0.12
	D	16	J_1	kgcm ²	0.45	0.4	–	–	–	–	–	–	–
				10 ⁻³ in.lb.s ²	0.4	0.35	–	–	–	–	–	–	–
	E	19	J_1	kgcm ²	0.53	0.48	–	–	–	–	–	–	–
				10 ⁻³ in.lb.s ²	0.47	0.42	–	–	–	–	–	–	–

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Valid for: Smooth shaft

1-stage

up to 14⁴⁾ (C)⁵⁾
clamping hub
diameter


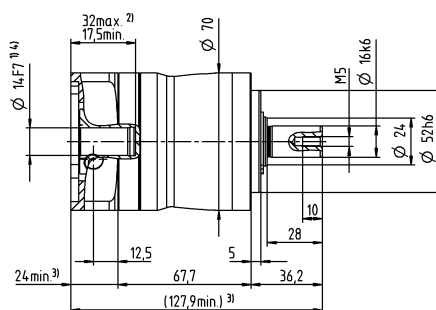



up to 19⁴⁾ (E)
clamping hub
diameter


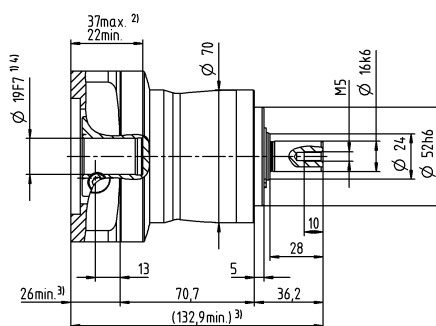



2-stage

up to 11⁴⁾ (B)⁵⁾
clamping hub
diameter

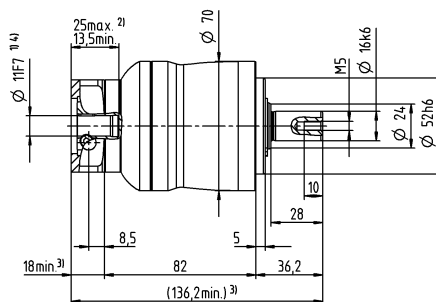


up to 14⁴⁾ (C)
clamping hub
diameter

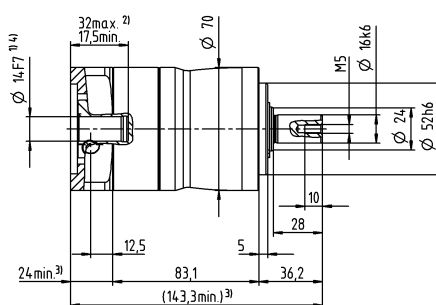

Motor shaft diameter [mm]

Other output variants

Shaft with key



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated

by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NP 025 MA 1- / 2-stage

				1-stage		2-stage								
Ratio	i			3	4	9	12	15	16	20	28	30	40	
Max. torque ^{a) b) e)}	T_{2a}		Nm	185	185	185	185	185	185	185	185	168	185	
			$in.lb$	1637	1637	1637	1637	1637	1637	1637	1637	1637	1487	1637
Max. acceleration torque ^{a)} (max. 1000 cycles per hour)	T_{2B}		Nm	125	115	125	125	120	115	115	115	105	115	
			$in.lb$	1106	1018	1106	1106	1062	1018	1018	1018	929	1018	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}		Nm	190	190	190	190	190	190	190	190	190	190	
			$in.lb$	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)	n_{1N}		rpm	3100	3300	3300	3500	3700	3500	3700	4000	4300	4300	
Max. input speed	n_{1Max}		rpm	7000	7000	8000	8000	8000	8000	8000	8000	8000	8000	
Mean no load running torque ^{b)} (at n_1 =3000 rpm and 20 °C gearbox temperature)	T_{012}		Nm	0.38	0.31	0.22	0.18	0.16	0.16	0.15	0.12	0.12	0.11	
			$in.lb$	3.4	2.7	1.9	1.6	1.4	1.4	1.3	1.1	1.1	0.97	
Max. backlash	j_t		$arcmin$	≤ 8		≤ 10								
Torsional rigidity ^{b)}	C_{t21}		$Nm/arcmin$	12	12	12	12	12	12	12	10	12	12	
			$in.lb/arcmin$	106	106	106	106	106	106	106	89	106	106	
Max. axial force ^{c)}	F_{2AMax}		N	1900		1900								
			lb_f	428		428								
Max. lateral force ^{c)}	F_{2QMMax}		N	2800		2800								
			lb_f	630		630								
Max. tilting moment	M_{2KMax}		Nm	137		137								
			$in.lb$	1213		1213								
Efficiency at full load	η		%	97		95								
Service life	L_h		h	> 20000		> 20000								
Weight (incl. standard adapter plate)	m		kg	3.8		4.1								
			lb_m	8.4		9.1								
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}		$dB(A)$	≤ 61		≤ 59								
Max. permitted housing temperature			°C	+90		+90								
			°F	+194		+194								
Ambient temperature			°C	–15 to +40		–15 to +40								
			°F	+5 to +104		+5 to +104								
Lubrication				Lubricated for life										
Direction of rotation				In- and output same direction										
Protection class				IP 64										
Elastomer coupling (recommended product type – validate sizing with cymex®)				ELC-0060BA022.000-X										
Bore diameter of coupling on the application side			mm	X = 012.000 - 032.000										
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	A	9	J_1	$kgcm^2$	–	–	0.26	0.22	0.21	0.21	0.2	0.19	0.19	0.19
				$10^{-3} in.lb.s^2$	–	–	0.23	0.19	0.19	0.19	0.18	0.17	0.17	0.17
	B	11	J_1	$kgcm^2$	–	–	0.28	0.24	0.23	0.23	0.22	0.21	0.21	0.21
				$10^{-3} in.lb.s^2$	–	–	0.25	0.21	0.2	0.2	0.19	0.19	0.19	0.19
	C	14	J_1	$kgcm^2$	0.57	0.46	0.35	0.31	0.3	0.3	0.3	0.29	0.28	0.28
				$10^{-3} in.lb.s^2$	0.5	0.41	0.31	0.27	0.27	0.27	0.27	0.26	0.25	0.25
	D	16	J_1	$kgcm^2$	0.71	0.61	0.48	0.44	0.43	0.43	0.42	0.41	0.41	0.41
				$10^{-3} in.lb.s^2$	0.63	0.54	0.42	0.39	0.38	0.38	0.37	0.36	0.36	0.36
	E	19	J_1	$kgcm^2$	0.8	0.7	0.56	0.52	0.51	0.51	0.51	0.5	0.5	0.49
				$10^{-3} in.lb.s^2$	0.71	0.62	0.5	0.46	0.45	0.45	0.45	0.44	0.44	0.43
	G	24	J_1	$kgcm^2$	1.8	1.7	–	–	–	–	–	–	–	–
				$10^{-3} in.lb.s^2$	1.6	1.5	–	–	–	–	–	–	–	–
	H	28	J_1	$kgcm^2$	1.5	1.4	–	–	–	–	–	–	–	–
				$10^{-3} in.lb.s^2$	1.3	1.2	–	–	–	–	–	–	–	–

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Valid for: Smooth shaft

1-stage

up to 19⁴⁾ (E)⁵⁾
clamping hub
diameter


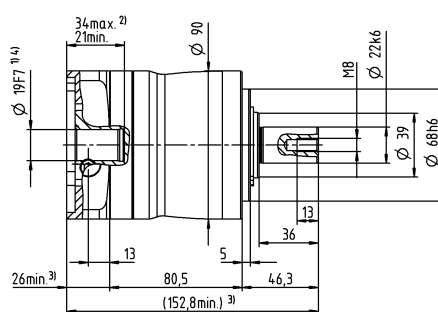



up to 28⁴⁾ (H)
clamping hub
diameter


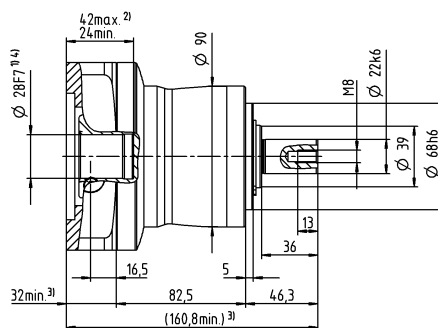



2-stage

up to 14⁴⁾ (C)⁵⁾
clamping hub
diameter

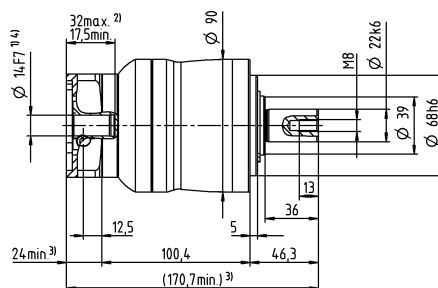


up to 19⁴⁾ (E)
clamping hub
diameter

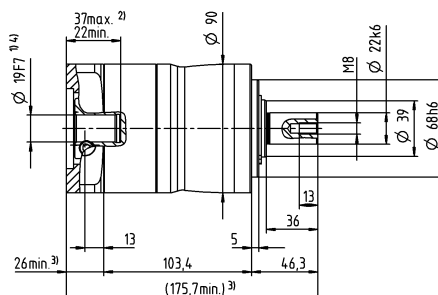

Motor shaft diameter [mm]

Other output variants

Shaft with key



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NP 035 MA 1- / 2-stage

				1-stage		2-stage								
Ratio		i		3	4	9	12	15	16	20	28	30	40	
Max. torque ^{a) b) e)}		T_{2a}	Nm	480	480	480	480	480	480	480	480	432	480	
			$in.lb$	4248	4248	4248	4248	4248	4248	4248	4248	3824	4248	
Max. acceleration torque ^{a)} (max. 1000 cycles per hour)		T_{2B}	Nm	305	305	305	305	300	305	305	305	270	305	
			$in.lb$	2699	2699	2699	2699	2655	2699	2699	2699	2390	2699	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)		T_{2Not}	Nm	500	500	500	500	500	500	500	500	500	500	
			$in.lb$	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425	
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)		n_{1N}	rpm	2300	2500	3100	3300	3400	3300	3400	3600	3900	3900	
Max. input speed		n_{1Max}	rpm	6000	6000	7000	7000	7000	7000	7000	7000	7000	7000	
Mean no load running torque ^{b)} (at n_1 =3000 rpm and 20 °C gearbox temperature)		T_{012}	Nm	1	0.85	0.45	0.36	0.3	0.32	0.27	0.22	0.19	0.18	
			$in.lb$	8.9	7.5	4	3.2	2.7	2.8	2.4	1.9	1.7	1.6	
Max. backlash		j_t	$arcmin$	≤ 8		≤ 10								
Torsional rigidity ^{b)}		C_{t21}	$Nm/arcmin$	30	30	30	30	30	30	30	30	30	30	
			$in.lb/arcmin$	266	266	266	266	266	266	266	266	266	266	
Max. axial force ^{c)}		F_{2AMax}	N	4000		4000								
			lb_f	900		900								
Max. lateral force ^{c)}		F_{2QMMax}	N	5000		5000								
			lb_f	1125		1125								
Max. tilting moment		M_{2KMax}	Nm	345		345								
			$in.lb$	3054		3054								
Efficiency at full load		η	%	97		95								
Service life		L_h	h	> 20000		> 20000								
Weight (incl. standard adapter plate)		m	kg	9.4		9.8								
			lb_m	21		22								
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)		L_{PA}	$dB(A)$	≤ 65		≤ 61								
Max. permitted housing temperature			°C	+90		+90								
			°F	+194		+194								
Ambient temperature			°C	–15 to +40		–15 to +40								
			°F	+5 to +104		+5 to +104								
Lubrication				Lubricated for life										
Direction of rotation				In- and output same direction										
Protection class				IP 64										
Elastomer coupling (recommended product type – validate sizing with cymex®)				ELC-0150BA032.000-X										
Bore diameter of coupling on the application side			mm	X = 019.000 - 036.000										
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	C	14	J_1	$kgcm^2$	–	–	0.61	0.6	0.6	0.43	0.42	0.37	0.52	0.36
				$10^{-3} in.lb.s^2$	–	–	0.54	0.53	0.53	0.38	0.37	0.33	0.46	0.32
	D	16	J_1	$kgcm^2$	–	–	0.76	0.75	0.75	0.58	0.57	0.5	0.67	0.51
				$10^{-3} in.lb.s^2$	–	–	0.67	0.66	0.66	0.51	0.5	0.44	0.59	0.45
	E	19	J_1	$kgcm^2$	2.6	1.7	0.85	0.83	0.83	0.67	0.66	0.6	0.75	0.6
				$10^{-3} in.lb.s^2$	2.3	1.5	0.75	0.73	0.73	0.59	0.58	0.53	0.66	0.53
	G	24	J_1	$kgcm^2$	3.4	2.5	1.9	1.9	1.9	1.7	1.7	1.6	1.8	1.6
				$10^{-3} in.lb.s^2$	3	2.2	1.7	1.7	1.7	1.5	1.5	1.4	1.6	1.4
	H	28	J_1	$kgcm^2$	3.1	2.2	1.6	1.6	1.6	1.4	1.4	1.3	0.5	1.3
				$10^{-3} in.lb.s^2$	2.7	1.9	1.4	1.4	1.4	1.2	1.2	1.2	0.44	1.2
	I	32	J_1	$kgcm^2$	7.2	6.3	–	–	–	–	–	–	–	–
				$10^{-3} in.lb.s^2$	6.4	5.6	–	–	–	–	–	–	–	–
	K	38	J_1	$kgcm^2$	8.3	7.4	–	–	–	–	–	–	–	–
				$10^{-3} in.lb.s^2$	7.3	6.5	–	–	–	–	–	–	–	–

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Valid for: Smooth shaft

1-stage

up to 24⁴⁾ (G⁵⁾/H)
clamping hub
diameter


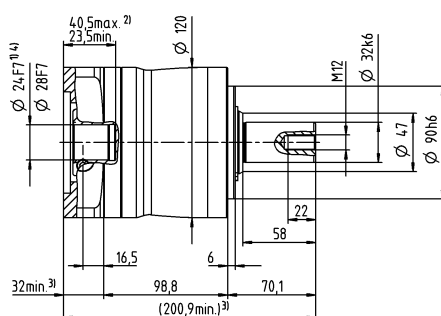



up to 38⁴⁾ (K)
clamping hub
diameter


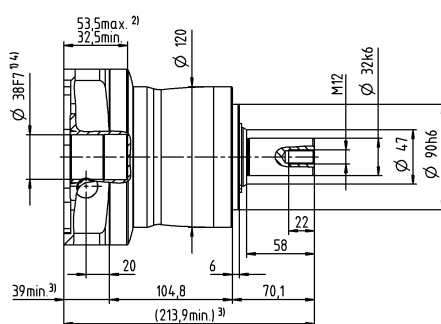



2-stage

up to 19⁴⁾ (E⁵⁾
clamping hub
diameter

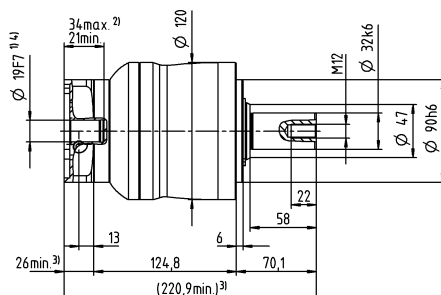


up to 28⁴⁾ (H)
clamping hub
diameter

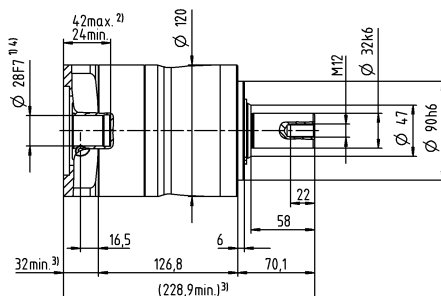

Motor shaft diameter [mm]

Other output variants

Shaft with key



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated

by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPL 015 MF 1-stage

				1-stage						
Ratio		i		3	4	5	7	8	10	
Max. torque ^{a) b) e)}		T_{2a}	Nm	51	56	64	64	56	56	
			$in.lb$	451	496	566	566	496	496	
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)		T_{2B}	Nm	32	35	40	40	35	35	
			$in.lb$	283	310	354	354	310	310	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)		T_{2Not}	Nm	80	80	80	80	80	80	
			$in.lb$	708	708	708	708	708	708	
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)		n_{1N}	rpm	2900	3100	3300	3600	3600	3800	
Max. input speed		n_{1Max}	rpm	8000	8000	8000	8000	8000	8000	
Mean no load running torque ^{b)} (at n_1 = 3000 rpm and 20 °C gearbox temperature)		T_{012}	Nm	0.92	0.74	0.62	0.51	0.47	0.41	
			$in.lb$	8.1	6.5	5.5	4.5	4.2	3.6	
Max. backlash		j_t	$arcmin$	≤ 8						
Torsional rigidity ^{b)}		C_{t21}	$Nm/arcmin$	3.3	3.3	3.3	3.3	2.8	2.8	
			$in.lb/arcmin$	29	29	29	29	25	25	
Max. axial force ^{c)}		F_{2AMax}	N	2400						
			lb_f	540						
Max. lateral force ^{c)}		F_{2QMMax}	N	2800						
			lb_f	630						
Max. tilting moment		M_{2KMMax}	Nm	152						
			$in.lb$	1345						
Efficiency at full load		η	%	97						
Service life		L_h	h	> 20000						
Weight (incl. standard adapter plate)		m	kg	1.9						
			lb_m	4.2						
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)		L_{PA}	$dB(A)$	≤ 59						
Max. permitted housing temperature			°C	+90						
			°F	+194						
Ambient temperature			°C	–15 to +40						
			°F	+5 to +104						
Lubrication				Lubricated for life						
Direction of rotation				In- and output same direction						
Protection class				IP 65						
Elastomer coupling (recommended product type – validate sizing with cymex®)				ELC-0060BA016.000-X						
Bore diameter of coupling on the application side			mm	X = 012.000 - 032.000						
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	A	9	J_1	$kgcm^2$	0.25	0.19	0.17	0.14	0.14	0.13
				$10^{-3} in.lb.s^2$	0.22	0.17	0.15	0.12	0.12	0.12
	B	11	J_1	$kgcm^2$	0.26	0.21	0.18	0.16	0.16	0.15
				$10^{-3} in.lb.s^2$	0.23	0.19	0.16	0.14	0.14	0.13
	C	14	J_1	$kgcm^2$	0.34	0.28	0.26	0.24	0.23	0.23
				$10^{-3} in.lb.s^2$	0.3	0.25	0.23	0.21	0.2	0.2
	D	16	J_1	$kgcm^2$	0.47	0.41	0.39	0.36	0.36	0.35
				$10^{-3} in.lb.s^2$	0.42	0.36	0.35	0.32	0.32	0.31
E	19	J_1	$kgcm^2$	0.55	0.49	0.47	0.45	0.44	0.44	
			$10^{-3} in.lb.s^2$	0.49	0.43	0.42	0.4	0.39	0.39	

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange




^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft




1-stage

Motor shaft diameter [mm]

up to 14⁴⁾ (C)⁵⁾
clamping hub
diameter

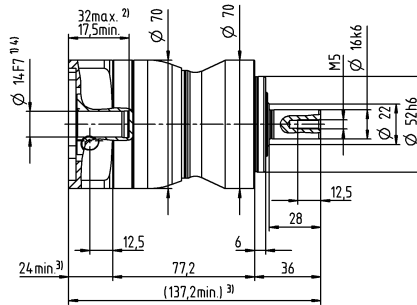

up to 19⁴⁾ (E)
clamping hub
diameter

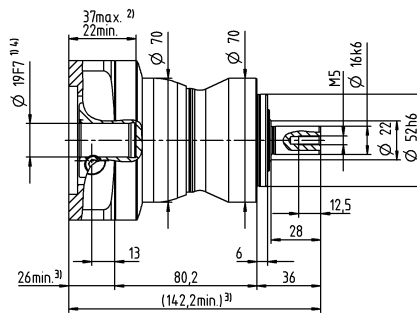



Planetary Gearboxes
Value Line

Other output variants

Shaft with key

Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPL 015 MF 2-stage

			2-stage														
Ratio	i		12	15	16	20	25	28	30	32	35	40	50	64	70	100	
Max. torque ^{a) b) e)}	T_{2a}	Nm	51	51	56	56	64	56	51	56	64	56	64	56	64	56	
		in.lb	451	451	496	496	566	496	451	496	566	496	566	496	566	496	
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}	Nm	32	32	35	35	40	35	32	35	40	35	40	35	40	35	
		in.lb	283	283	310	310	354	310	283	310	354	310	354	310	354	310	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	80	80	80	80	80	80	80	80	80	80	80	80	80	80	
		in.lb	708	708	708	708	708	708	708	708	708	708	708	708	708	708	
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)	n_{1N}	rpm	3800	4000	3800	4000	4000	4300	4600	4400	4300	4600	4600	4400	4600	4600	
Max. input speed	n_{1Max}	rpm	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	
Mean no load running torque ^{b)} (at n_1 = 3000 rpm and 20 °C gearbox temperature)	T_{012}	Nm	0.34	0.29	0.29	0.25	0.23	0.21	0.21	0.2	0.2	0.19	0.17	0.17	0.16	0.15	
		in.lb	3	2.6	2.6	2.2	2	1.9	1.9	1.8	1.8	1.7	1.5	1.5	1.4	1.3	
Max. backlash	j_t	arcmin	≤ 10														
Torsional rigidity ^{b)}	C_{t21}	Nm/arcmin	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	2.8	3.3	2.8	
		in.lb/arcmin	29	29	29	29	29	29	29	29	29	29	29	25	29	25	
Max. axial force ^{c)}	F_{2AMax}	N	2400														
		lb _f	540														
Max. lateral force ^{c)}	F_{2QMMax}	N	2800														
		lb _f	630														
Max. tilting moment	M_{2KMax}	Nm	152														
		in.lb	1345														
Efficiency at full load	η	%	95														
Service life	L_h	h	> 20000														
Weight (incl. standard adapter plate)	m	kg	2														
		lb _m	4.4														
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex [®])	L_{PA}	dB(A)	≤ 58														
Max. permitted housing temperature		°C	+90														
		°F	+194														
Ambient temperature		°C	−15 to +40														
		°F	+5 to +104														
Lubrication			Lubricated for life														
Direction of rotation			In- and output same direction														
Protection class			IP 65														
Elastomer coupling (recommended product type – validate sizing with cymex [®])			ELC-0060BA016.000-X														
Bore diameter of coupling on the application side		mm	X = 012.000 - 032.000														
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	Z	8	J_1	kgcm ²	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02
				10 ^{−3} in.lb.s ²	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02
	A	9	J_1	kgcm ²	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02
				10 ^{−3} in.lb.s ²	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02
	B	11	J_1	kgcm ²	0.06	0.06	0.05	0.05	0.05	0.05	0.05	0.04	0.05	0.04	0.04	0.04	0.04
				10 ^{−3} in.lb.s ²	0.05	0.05	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04
	C	14	J_1	kgcm ²	0.14	0.14	0.14	0.13	0.13	0.13	0.14	0.13	0.13	0.13	0.13	0.13	0.13
				10 ^{−3} in.lb.s ²	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12

Please use our sizing software cymex[®] for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Valid for: Smooth shaft

2-stage

up to 11⁴⁾ (B)⁵⁾
clamping hub
diameter

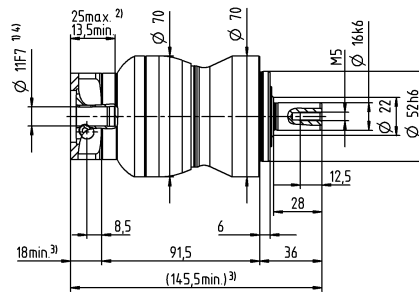

up to 14⁴⁾ (C)
clamping hub
diameter

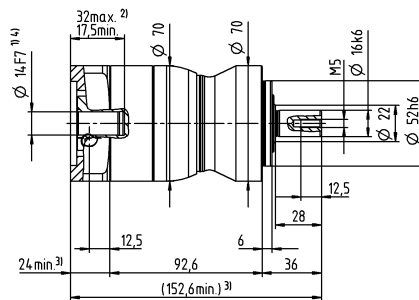


Motor shaft diameter [mm]


Planetary Gearboxes
Value Line

Other output variants

Shaft with key



Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPL 025 MF 1-stage

				1-stage						
Ratio		i		3	4	5	7	8	10	
Max. torque ^{a) b) e)}		T_{2a}	Nm	128	152	160	160	144	144	
			$in.lb$	1133	1345	1416	1416	1275	1275	
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)		T_{2B}	Nm	80	95	100	100	90	90	
			$in.lb$	708	841	885	885	797	797	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)		T_{2Not}	Nm	190	190	190	190	190	190	
			$in.lb$	1682	1682	1682	1682	1682	1682	
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)		n_{1N}	rpm	2700	2900	3000	3200	3300	3500	
Max. input speed		n_{1Max}	rpm	7000	7000	7000	7000	7000	7000	
Mean no load running torque ^{b)} (at n_1 = 3000 rpm and 20 °C gearbox temperature)		T_{012}	Nm	1.8	1.5	1.3	1.1	1	0.94	
			$in.lb$	16	13	12	9.7	8.9	8.3	
Max. backlash		j_t	$arcmin$	≤ 8						
Torsional rigidity ^{b)}		C_{t21}	$Nm/arcmin$	9.5	9.5	9.5	9.5	8.5	8.5	
			$in.lb/arcmin$	84	84	84	84	75	75	
Max. axial force ^{c)}		F_{2AMax}	N	3350						
			lb_f	754						
Max. lateral force ^{c)}		F_{2QMMax}	N	4200						
			lb_f	945						
Max. tilting moment		M_{2KMMax}	Nm	236						
			$in.lb$	2089						
Efficiency at full load		η	%	97						
Service life		L_h	h	> 20000						
Weight (incl. standard adapter plate)		m	kg	3.9						
			lb_m	8.6						
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)		L_{PA}	$dB(A)$	≤ 61						
Max. permitted housing temperature			°C	+90						
			°F	+194						
Ambient temperature			°C	–15 to +40						
			°F	+5 to +104						
Lubrication				Lubricated for life						
Direction of rotation				In- and output same direction						
Protection class				IP 65						
Elastomer coupling (recommended product type – validate sizing with cymex®)				ELC-0060BA022.000-X						
Bore diameter of coupling on the application side			mm	X = 012.000 - 032.000						
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	C	14	J_1	$kgcm^2$	0.58	0.47	0.38	0.3	0.28	0.26
				$10^{-3} in.lb.s^2$	0.51	0.42	0.34	0.27	0.25	0.23
	D	16	J_1	$kgcm^2$	0.73	0.62	0.53	0.43	0.42	0.4
				$10^{-3} in.lb.s^2$	0.65	0.55	0.47	0.38	0.37	0.35
	E	19	J_1	$kgcm^2$	0.81	0.71	0.61	0.53	0.51	0.49
				$10^{-3} in.lb.s^2$	0.72	0.63	0.54	0.47	0.45	0.43
	G	24	J_1	$kgcm^2$	1.8	1.7	1.6	1.6	1.5	1.5
				$10^{-3} in.lb.s^2$	1.6	1.5	1.4	1.4	1.3	1.3
H	28	J_1	$kgcm^2$	1.6	1.4	1.4	1.3	1.3	1.2	
			$10^{-3} in.lb.s^2$	1.4	1.2	1.2	1.2	1.2	1.1	

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Valid for: Smooth shaft

1-stage

up to 19⁴⁾ (E)⁵⁾
clamping hub
diameter

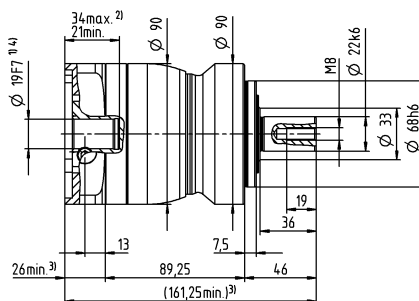

up to 28⁴⁾ (H)
clamping hub
diameter

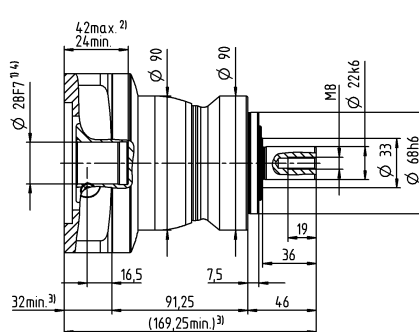


Motor shaft diameter [mm]


Planetary Gearboxes
Value Line

Other output variants

Shaft with key



Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPL 025 MF 2-stage

			2-stage														
Ratio	i		9	12	15	16	20	25	28	30	32	35	40	50	64	70	100
Max. torque ^{a) b) e)}	T_{2a}	Nm	128	128	128	152	152	160	152	128	144	160	152	160	144	160	144
		in.lb	1133	1133	1133	1345	1345	1416	1345	1133	1275	1416	1345	1416	1275	1416	1275
Max. acceleration torque ^{a)} (max. 1000 cycles per hour)	T_{2B}	Nm	80	80	80	95	95	100	95	80	90	100	95	100	90	100	90
		in.lb	708	708	708	841	841	885	841	708	797	885	841	885	797	885	797
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	190	190	190	190	190	190	190	190	190	190	190	190	190	190	190
		in.lb	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}	rpm	2900	3500	3700	3500	3700	3700	4000	4300	4100	4000	4300	4300	4100	4300	4300
Max. input speed	n_{1Max}	rpm	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000
Mean no load running torque ^{b)} (at $n_1 = 3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	0.67	0.55	0.47	0.46	0.4	0.36	0.34	0.33	0.32	0.31	0.29	0.27	0.25	0.25	0.23
		in.lb	5.9	4.9	4.2	4.1	3.5	3.2	3	2.9	2.8	2.7	2.6	2.4	2.2	2.2	2
Max. backlash	j_t	arcmin	≤ 10														
Torsional rigidity ^{b)}	C_{t21}	Nm/arcmin	10	10	10	10	10	9.5	10	10	10	9.5	10	9.5	8.5	9.5	8.5
		in.lb/arcmin	89	89	89	89	89	84	89	89	89	84	89	84	75	84	75
Max. axial force ^{c)}	F_{2AMax}	N	3350														
		lb _f	754														
Max. lateral force ^{c)}	F_{2QMMax}	N	4200														
		lb _f	945														
Max. tilting moment	M_{2KMMax}	Nm	236														
		in.lb	2089														
Efficiency at full load	η	%	95														
Service life	L_h	h	> 20000														
Weight (incl. standard adapter plate)	m	kg	4.2														
		lb _m	9.3														
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 59														
Max. permitted housing temperature		°C	+90														
		°F	+194														
Ambient temperature		°C	-15 to +40														
		°F	+5 to +104														
Lubrication			Lubricated for life														
Direction of rotation			In- and output same direction														
Protection class			IP 65														
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0060BA022.000-X														
Bore diameter of coupling on the application side		mm	X = 012.000 - 032.000														
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	A	9	J_1	kgcm ²	0.26	0.22	0.21	0.21	0.2	0.2	0.19	0.19	0.19	0.19	0.19	0.19	0.19
				10 ⁻³ in.lb.s ²	0.23	0.19	0.19	0.19	0.18	0.18	0.17	0.17	0.17	0.17	0.17	0.17	0.17
	B	11	J_1	kgcm ²	0.28	0.24	0.23	0.23	0.22	0.22	0.21	0.21	0.21	0.21	0.21	0.21	0.21
				10 ⁻³ in.lb.s ²	0.25	0.21	0.2	0.2	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.19
	C	14	J_1	kgcm ²	0.35	0.31	0.3	0.3	0.3	0.29	0.29	0.28	0.28	0.28	0.28	0.28	0.28
				10 ⁻³ in.lb.s ²	0.31	0.27	0.27	0.27	0.27	0.26	0.26	0.25	0.25	0.25	0.25	0.25	0.25
	D	16	J_1	kgcm ²	0.48	0.44	0.43	0.43	0.42	0.42	0.41	0.41	0.41	0.41	0.41	0.41	0.41
				10 ⁻³ in.lb.s ²	0.42	0.39	0.38	0.38	0.37	0.37	0.36	0.36	0.36	0.36	0.36	0.36	0.36
	E	19	J_1	kgcm ²	0.56	0.52	0.51	0.52	0.51	0.5	0.5	0.5	0.5	0.5	0.49	0.49	0.49
				10 ⁻³ in.lb.s ²	0.5	0.46	0.45	0.46	0.45	0.44	0.44	0.44	0.44	0.43	0.43	0.43	0.43

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Valid for: Smooth shaft

2-stage

up to 14⁴⁾ (C)⁵⁾
clamping hub
diameter

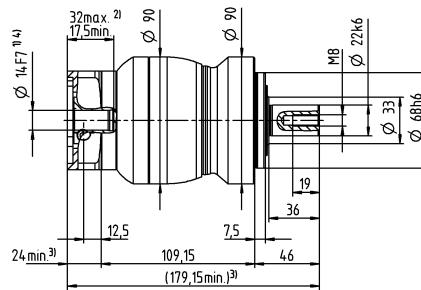

up to 19⁴⁾ (E)
clamping hub
diameter

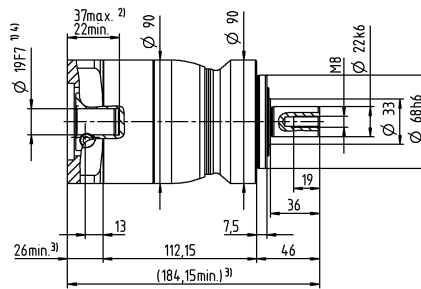



Motor shaft diameter [mm]

Planetary Gearboxes
Value Line

Other output variants

Shaft with key

Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPL 035 MF 1-stage

				1-stage						
Ratio		i		3	4	5	7	8	10	
Max. torque ^{a) b) e)}		T_{2a}	Nm	320	408	400	400	352	352	
			in.lb	2832	3611	3540	3540	3115	3115	
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)		T_{2B}	Nm	200	255	250	250	220	220	
			in.lb	1770	2257	2213	2213	1947	1947	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)		T_{2Not}	Nm	500	500	500	500	500	500	
			in.lb	4425	4425	4425	4425	4425	4425	
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)		n_{1N}	rpm	2000	2200	2300	2500	2600	2700	
Max. input speed		n_{1Max}	rpm	6000	6000	6000	6000	6000	6000	
Mean no load running torque ^{b)} (at n_1 = 3000 rpm and 20 °C gearbox temperature)		T_{012}	Nm	3.3	2.7	2.3	1.9	1.7	1.5	
			in.lb	29	24	20	17	15	13	
Max. backlash		j_t	arcmin	≤ 8						
Torsional rigidity ^{b)}		C_{t21}	Nm/arcmin	25	25	25	25	22	22	
			in.lb/arcmin	221	221	221	221	195	195	
Max. axial force ^{c)}		F_{2AMax}	N	5650						
			lb _f	1271						
Max. lateral force ^{c)}		F_{2QMMax}	N	6600						
			lb _f	1485						
Max. tilting moment		M_{2KMax}	Nm	487						
			in.lb	4310						
Efficiency at full load		η	%	97						
Service life		L_h	h	> 20000						
Weight (incl. standard adapter plate)		m	kg	9.1						
			lb _m	20						
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)		L_{PA}	dB(A)	≤ 65						
Max. permitted housing temperature			°C	+90						
			°F	+194						
Ambient temperature			°C	–15 to +40						
			°F	+5 to +104						
Lubrication				Lubricated for life						
Direction of rotation				In- and output same direction						
Protection class				IP 65						
Elastomer coupling (recommended product type – validate sizing with cymex®)				ELC-0150BA032.000-X						
Bore diameter of coupling on the application side			mm	X = 019.000 - 036.000						
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	E	19	J_1	kgcm ²	2.5	1.7	1.3	1	0.94	0.87
				10 ⁻³ in.lb.s ²	2.2	1.5	1.2	0.89	0.83	0.77
	G	24	J_1	kgcm ²	3.3	2.4	2.1	1.8	1.7	1.6
				10 ⁻³ in.lb.s ²	2.9	2.1	1.9	1.6	1.5	1.4
	H	28	J_1	kgcm ²	3	2.2	1.8	1.5	1.4	1.4
				10 ⁻³ in.lb.s ²	2.7	1.9	1.6	1.3	1.2	1.2
	I	32	J_1	kgcm ²	7.1	6.2	5.9	5.6	5.5	5.4
				10 ⁻³ in.lb.s ²	6.3	5.5	5.2	5	4.9	4.8
K	38	J_1	kgcm ²	8.3	7.4	7.1	6.7	6.6	6.6	
			10 ⁻³ in.lb.s ²	7.3	6.5	6.3	5.9	5.8	5.8	

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange


^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft






1-stage

Motor shaft diameter [mm]

up to 24/28⁴⁾
(G⁵⁾/H)
clamping hub
diameter





up to 38⁴⁾ (K)
clamping hub
diameter

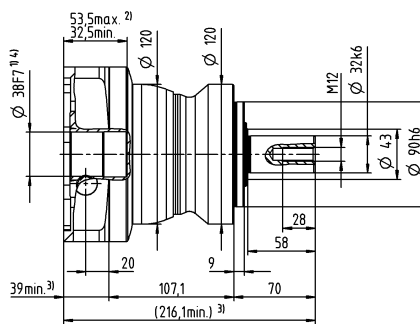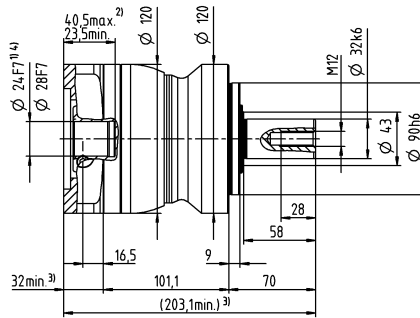

Other output variants

Shaft with key

Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPL 035 MF 2-stage

				2-stage															
Ratio			i		9	12	15	16	20	25	28	30	32	35	40	50	64	70	100
Max. torque ^{a) b) e)}			T_{2a}	Nm	320	320	320	408	408	400	408	320	408	400	408	400	352	400	352
				in.lb	2832	2832	2832	3611	3611	3540	3611	2832	3611	3540	3611	3540	3115	3540	3115
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)			T_{2B}	Nm	200	200	200	255	255	250	255	200	255	250	255	250	220	250	220
				in.lb	1770	1770	1770	2257	2257	2213	2257	1770	2257	2213	2257	2213	1947	2213	1947
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)			T_{2Not}	Nm	500	500	500	500	500	500	500	500	500	500	500	500	500	500	500
				in.lb	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)			n_{1N}	rpm	2700	3300	3400	3300	3400	3400	3600	3900	3700	3600	3900	3900	3700	3900	3900
Max. input speed			n_{1Max}	rpm	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000
Mean no load running torque ^{b)} (at n_1 = 3000 rpm and 20 °C gearbox temperature)			T_{012}	Nm	1.7	1.4	1.2	1.2	1.1	1	0.93	0.88	0.88	0.87	0.81	0.77	0.75	0.72	0.68
				in.lb	15	12	11	11	9.7	8.9	8.2	7.8	7.8	7.7	7.2	6.8	6.6	6.4	6
Max. backlash			j_t	arcmin	≤ 10														
Torsional rigidity ^{b)}			C_{t21}	Nm/arcmin	25	25	25	25	25	25	25	25	25	25	25	25	22	25	22
				in.lb/arcmin	221	221	221	221	221	221	221	221	221	221	221	221	195	221	195
Max. axial force ^{c)}			F_{2AMax}	N	5650														
				lb _f	1271														
Max. lateral force ^{c)}			F_{2QMMax}	N	6600														
				lb _f	1485														
Max. tilting moment			M_{2KMax}	Nm	487														
				in.lb	4310														
Efficiency at full load			η	%	95														
Service life			L_h	h	> 20000														
Weight (incl. standard adapter plate)			m	kg	9.5														
				lb _m	21														
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)			L_{PA}	dB(A)	≤ 61														
Max. permitted housing temperature				°C	+90														
				°F	+194														
Ambient temperature				°C	−15 to +40														
				°F	+5 to +104														
Lubrication					Lubricated for life														
Direction of rotation					In- and output same direction														
Protection class					IP 65														
Elastomer coupling (recommended product type – validate sizing with cymex®)					ELC-0150BA032.000-X														
Bore diameter of coupling on the application side				mm	X = 019.000 - 036.000														
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	C	14	J_1	kgcm ²	0.6	0.59	0.6	0.43	0.42	0.36	0.37	0.52	0.38	0.32	0.36	0.31	0.26	0.27	0.24
				10 ⁻³ in.lb.s ²	0.53	0.52	0.53	0.38	0.37	0.32	0.33	0.46	0.34	0.28	0.32	0.27	0.23	0.24	0.21
	D	16	J_1	kgcm ²	0.75	0.74	0.74	0.58	0.57	0.5	0.5	0.67	0.52	0.45	0.51	0.46	0.4	0.41	0.39
				10 ⁻³ in.lb.s ²	0.66	0.65	0.65	0.51	0.5	0.44	0.44	0.59	0.46	0.4	0.45	0.41	0.35	0.36	0.35
	E	19	J_1	kgcm ²	0.84	0.83	0.83	0.66	0.65	0.59	0.6	0.75	0.61	0.55	0.6	0.54	0.49	0.5	0.48
				10 ⁻³ in.lb.s ²	0.74	0.73	0.73	0.58	0.58	0.52	0.53	0.66	0.54	0.49	0.53	0.48	0.43	0.44	0.42
	G	24	J_1	kgcm ²	1.9	1.9	1.9	1.7	1.7	1.6	1.6	1.8	1.6	1.6	1.6	1.6	1.5	1.5	1.5
				10 ⁻³ in.lb.s ²	1.7	1.6	1.7	1.5	1.5	1.4	1.5	1.6	1.5	1.4	1.4	1.4	1.3	1.4	1.3
	H	28	J_1	kgcm ²	1.6	1.6	1.6	1.4	1.4	1.3	1.3	1.5	1.4	1.3	1.3	1.3	1.2	1.2	1.2
				10 ⁻³ in.lb.s ²	1.4	1.4	1.4	1.2	1.2	1.2	1.2	1.3	1.2	1.1	1.2	1.1	1.1	1.1	1.1

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Valid for: Smooth shaft

2-stage

up to 19⁴⁾ (E)⁵⁾
clamping hub
diameter

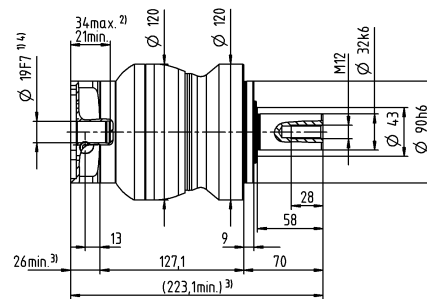

up to 28⁴⁾ (H)
clamping hub
diameter

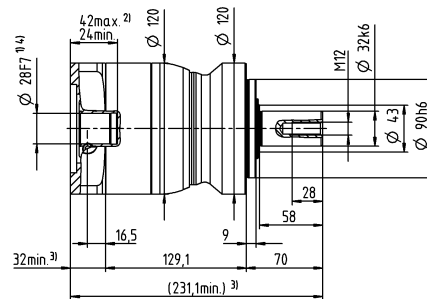



Motor shaft diameter [mm]

Planetary Gearboxes
Value Line

Other output variants

Shaft with key

Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPL 045 MF 1-/2-stage

				1-stage			2-stage					
Ratio		i		5	8	10	25	32	50	64	100	
Max. torque ^{a) b) e)}		T_{2a}	Nm	800	640	640	700	640	700	640	640	
			in.lb	7081	5665	5665	6196	5665	6196	5665	5665	
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)		T_{2B}	Nm	500	400	400	500	400	500	400	400	
			in.lb	4425	3540	3540	4425	3540	4425	3540	3540	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)		T_{2Not}	Nm	1000	1000	1000	1000	1000	1000	1000	1000	
			in.lb	8851	8851	8851	8851	8851	8851	8851	8851	
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)		n_{1N}	rpm	1800	1900	2000	2600	2500	3000	2900	3000	
Max. input speed		n_{1Max}	rpm	4000	4000	4000	6000	6000	6000	6000	6000	
Mean no load running torque ^{b)} (at n_1 = 3000 rpm and 20 °C gearbox temperature)		T_{012}	Nm	4.2	3	2.6	1.6	1.5	1.2	1.1	0.97	
			in.lb	37	27	23	14	13	11	9.7	8.6	
Max. backlash		j_t	arcmin	≤ 8			≤ 10					
Torsional rigidity ^{b)}		C_{t21}	Nm/arcmin	55	44	44	55	44	55	44	44	
			in.lb/arcmin	487	389	389	487	389	487	389	389	
Max. axial force ^{c)}		F_{2AMax}	N	9870			9870					
			lb _f	2221			2221					
Max. lateral force ^{c)}		F_{2QMMax}	N	9900			9900					
			lb _f	2228			2228					
Max. tilting moment		M_{2KMax}	Nm	952			952					
			in.lb	8426			8426					
Efficiency at full load		η	%	97			95					
Service life		L_h	h	> 20000			> 20000					
Weight (incl. standard adapter plate)		m	kg	20			20					
			lb _m	44			44					
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)		L_{PA}	dB(A)	≤ 68			≤ 65					
Max. permitted housing temperature			°C	+90			+90					
			°F	+194			+194					
Ambient temperature			°C	–15 to +40			–15 to +40					
			°F	+5 to +104			+5 to +104					
Lubrication				Lubricated for life								
Direction of rotation				In- and output same direction								
Protection class				IP 65								
Elastomer coupling (recommended product type – validate sizing with cymex®)				ELC-0300BA040.000-X								
Bore diameter of coupling on the application side			mm	X = 020.000 - 045.000								
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	E	19	J_1	kgcm ²	–	–	–	1.2	1.1	1	0.88	0.82
				10 ⁻³ in.lb.s ²	–	–	–	1.1	0.97	0.89	0.78	0.73
	G	24	J_1	kgcm ²	–	–	–	2	1.9	1.8	1.7	1.6
				10 ⁻³ in.lb.s ²	–	–	–	1.8	1.7	1.6	1.5	1.4
	H	28	J_1	kgcm ²	–	–	–	1.7	1.6	1.5	1.4	1.3
				10 ⁻³ in.lb.s ²	–	–	–	1.5	1.4	1.3	1.2	1.2
	I	32	J_1	kgcm ²	–	–	–	5.8	5.7	5.6	5.4	5.4
				10 ⁻³ in.lb.s ²	–	–	–	5.1	5	5	4.8	4.8
K	38	J_1	kgcm ²	8.7	7.3	7.2	7	6.9	6.8	6.6	6.5	
			10 ⁻³ in.lb.s ²	7.7	6.5	6.4	6.2	6.1	6	5.8	5.8	

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com






^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft



NPL 015 MA 1-/2-stage

			1-stage		2-stage								
Ratio	i		3	4	12	15	16	20	28	30	40		
Max. torque ^{a) b) e)}	T_{2a}	Nm	80	67	62	67	67	67	67	62	67		
		in.lb	708	593	549	593	593	593	593	549	593		
Max. acceleration torque ^{a)} (max. 1000 cycles per hour)	T_{2B}	Nm	55	42	39	42	42	42	42	39	42		
		in.lb	487	372	345	372	372	372	372	345	372		
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	80	80	80	80	80	80	80	80	80		
		in.lb	708	708	708	708	708	708	708	708	708		
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}	rpm	2900	3100	3800	4000	3800	4000	4300	4600	4600		
Max. input speed	n_{1Max}	rpm	8000	8000	10000	10000	10000	10000	10000	10000	10000		
Mean no load running torque ^{b)} (at n_1 = 3000 rpm and 20 °C gearbox temperature)	T_{012}	Nm	0.92	0.74	0.34	0.29	0.29	0.25	0.21	0.21	0.19		
		in.lb	8.1	6.5	3	2.6	2.6	2.2	1.9	1.9	1.7		
Max. backlash	j_t	arcmin	≤ 8		≤ 10								
Torsional rigidity ^{b)}	C_{t21}	Nm/arcmin	4	4	4	4	4	4	4	4	4		
		in.lb/arcmin	35	35	35	35	35	35	35	35	35		
Max. axial force ^{c)}	F_{2AMax}	N	2400		2400								
		lb _f	540		540								
Max. lateral force ^{c)}	F_{2QMax}	N	2800		2800								
		lb _f	630		630								
Max. tilting moment	M_{2KMax}	Nm	152		152								
		in.lb	1345		1345								
Efficiency at full load	η	%	97		95								
Service life	L_h	h	> 20000		> 20000								
Weight (incl. standard adapter plate)	m	kg	1.9		2								
		lb _m	4.2		4.4								
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 59		≤ 58								
Max. permitted housing temperature		°C	+90		+90								
		°F	+194		+194								
Ambient temperature		°C	–15 to +40		–15 to +40								
		°F	+5 to +104		+5 to +104								
Lubrication			Lubricated for life										
Direction of rotation			In- and output same direction										
Protection class			IP 65										
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0060BA016.000-X										
Bore diameter of coupling on the application side		mm	X = 012.000 - 032.000										
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	Z	8	J_1	kgcm ²	–	–	0.04	0.04	0.03	0.03	0.03	0.03	
				10 ⁻³ in.lb.s ²	–	–	0.04	0.04	0.03	0.03	0.03	0.03	0.03
	A	9	J_1	kgcm ²	0.25	0.19	0.04	0.04	0.03	0.03	0.03	0.03	
				10 ⁻³ in.lb.s ²	0.22	0.17	0.04	0.04	0.03	0.03	0.03	0.03	0.03
	B	11	J_1	kgcm ²	0.26	0.21	0.06	0.06	0.05	0.05	0.05	0.05	
				10 ⁻³ in.lb.s ²	0.23	0.19	0.05	0.05	0.04	0.04	0.04	0.04	0.04
	C	14	J_1	kgcm ²	0.34	0.28	0.14	0.14	0.14	0.13	0.13	0.14	
				10 ⁻³ in.lb.s ²	0.3	0.25	0.12	0.12	0.12	0.12	0.12	0.12	0.12
	D	16	J_1	kgcm ²	0.47	0.41	–	–	–	–	–	–	–
				10 ⁻³ in.lb.s ²	0.42	0.36	–	–	–	–	–	–	–
	E	19	J_1	kgcm ²	0.55	0.49	–	–	–	–	–	–	–
				10 ⁻³ in.lb.s ²	0.49	0.43	–	–	–	–	–	–	–

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Valid for: Smooth shaft

1-stage

up to 14⁴⁾ (C)⁵⁾
clamping hub
diameter


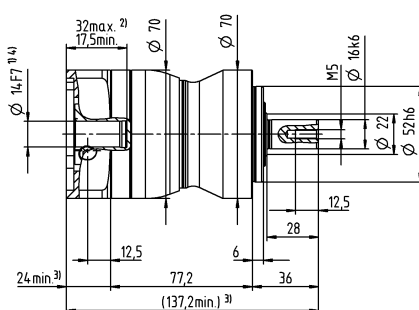



up to 19⁴⁾ (E)
clamping hub
diameter


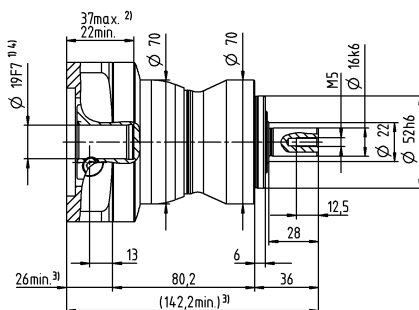



2-stage

up to 11⁴⁾ (B)⁵⁾
clamping hub
diameter

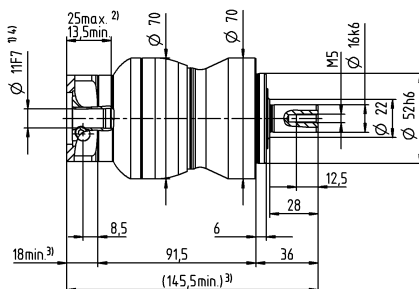

up to 14⁴⁾ (C)
clamping hub
diameter

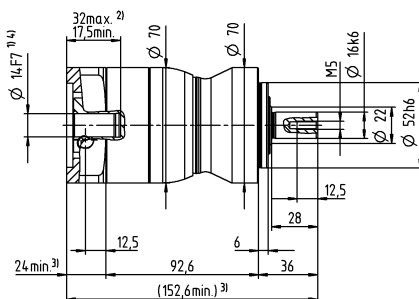



Motor shaft diameter [mm]

Other output variants

Shaft with key

Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated

by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPL 025 MA 1-/2-stage

					1-stage		2-stage							
Ratio	i			3	4	9	12	15	16	20	28	30	40	
Max. torque ^{a) b) e)}	T_{2a}		Nm	185	185	185	185	185	185	185	185	168	185	
			in.lb	1637	1637	1637	1637	1637	1637	1637	1637	1637	1487	1637
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}		Nm	125	115	125	125	120	115	115	115	105	115	
			in.lb	1106	1018	1106	1106	1062	1018	1018	1018	1018	929	1018
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}		Nm	190	190	190	190	190	190	190	190	190	190	
			in.lb	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)	n_{1N}		rpm	2700	2900	2900	3500	3700	3500	3700	4000	4300	4300	
Max. input speed	n_{1Max}		rpm	7000	7000	8000	8000	8000	8000	8000	8000	8000	8000	
Mean no load running torque ^{b)} (at n_1 =3000 rpm and 20 °C gearbox temperature)	T_{012}		Nm	1.8	1.5	0.67	0.55	0.47	0.46	0.4	0.34	0.33	0.29	
			in.lb	16	13	5.9	4.9	4.2	4.1	3.5	3	2.9	2.6	
Max. backlash	j_t		arcmin	≤ 8		≤ 10								
Torsional rigidity ^{b)}	C_{t21}		Nm/arcmin	12	12	12	12	12	12	12	12	12	12	
			in.lb/arcmin	106	106	106	106	106	106	106	106	106	106	
Max. axial force ^{c)}	F_{2AMax}		N	3350		3350								
			lb _f	754		754								
Max. lateral force ^{c)}	F_{2QMax}		N	4200		4200								
			lb _f	945		945								
Max. tilting moment	M_{2KMax}		Nm	236		236								
			in.lb	2089		2089								
Efficiency at full load	η		%	97		95								
Service life	L_h		h	> 20000		> 20000								
Weight (incl. standard adapter plate)	m		kg	3.9		4.2								
			lb _m	8.6		9.3								
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}		dB(A)	≤ 61		≤ 59								
Max. permitted housing temperature			°C	+90		+90								
			°F	+194		+194								
Ambient temperature			°C	–15 to +40		–15 to +40								
			°F	+5 to +104		+5 to +104								
Lubrication				Lubricated for life										
Direction of rotation				In- and output same direction										
Protection class				IP 65										
Elastomer coupling (recommended product type – validate sizing with cymex®)				ELC-0060BA022.000-X										
Bore diameter of coupling on the application side			mm	X = 012.000 - 032.000										
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	A	9	J_1	kgcm ²	–	–	0.26	0.22	0.21	0.21	0.2	0.19	0.19	0.19
				10 ⁻³ in.lb.s ²	–	–	0.23	0.19	0.19	0.19	0.18	0.17	0.17	0.17
	B	11	J_1	kgcm ²	–	–	0.28	0.24	0.23	0.23	0.22	0.21	0.21	0.21
				10 ⁻³ in.lb.s ²	–	–	0.25	0.21	0.2	0.2	0.19	0.19	0.19	0.19
	C	14	J_1	kgcm ²	0.58	0.47	0.35	0.31	0.3	0.3	0.3	0.29	0.28	0.28
				10 ⁻³ in.lb.s ²	0.51	0.42	0.31	0.27	0.27	0.27	0.27	0.26	0.25	0.25
	D	16	J_1	kgcm ²	0.73	0.62	0.48	0.44	0.43	0.43	0.42	0.41	0.41	0.41
				10 ⁻³ in.lb.s ²	0.65	0.55	0.42	0.39	0.38	0.38	0.37	0.36	0.36	0.36
	E	19	J_1	kgcm ²	0.81	0.71	0.56	0.52	0.51	0.52	0.51	0.5	0.5	0.49
				10 ⁻³ in.lb.s ²	0.72	0.63	0.5	0.46	0.45	0.46	0.45	0.44	0.44	0.43
	G	24	J_1	kgcm ²	1.8	1.7	–	–	–	–	–	–	–	–
				10 ⁻³ in.lb.s ²	1.6	1.5	–	–	–	–	–	–	–	–
	H	28	J_1	kgcm ²	1.6	1.4	–	–	–	–	–	–	–	–
				10 ⁻³ in.lb.s ²	1.4	1.2	–	–	–	–	–	–	–	–

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Valid for: Smooth shaft

1-stage

up to 19⁴⁾ (E)⁵⁾
clamping hub
diameter


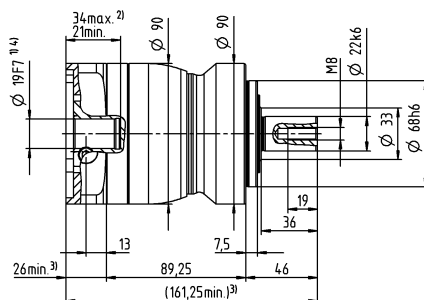



up to 28⁴⁾ (H)
clamping hub
diameter


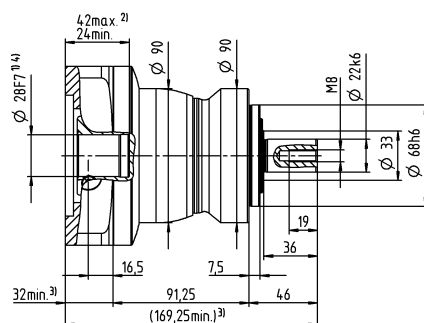



2-stage

up to 14⁴⁾ (C)⁵⁾
clamping hub
diameter

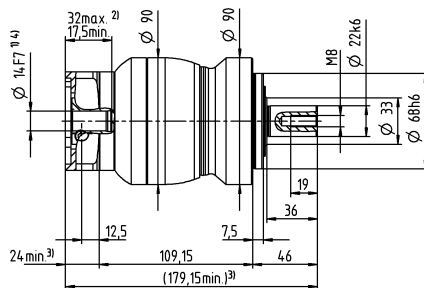

up to 19⁴⁾ (E)
clamping hub
diameter

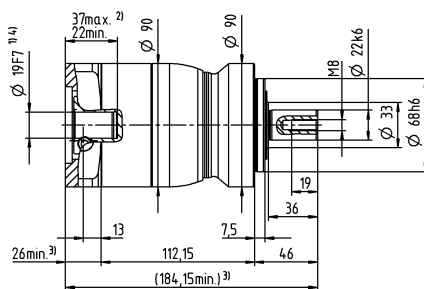



Motor shaft diameter [mm]

Other output variants

Shaft with key

Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated

by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPL 035 MA 1-/2-stage

				1-stage			2-stage							
Ratio	i			3	4	9	12	15	16	20	28	30	40	
Max. torque ^{a) b) e)}	T_{2a}		<i>Nm</i>	480	480	480	480	480	480	480	480	432	480	
			<i>in.lb</i>	4248	4248	4248	4248	4248	4248	4248	4248	4248	3824	4248
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}		<i>Nm</i>	305	305	305	305	300	305	305	305	270	305	
			<i>in.lb</i>	2699	2699	2699	2699	2655	2699	2699	2699	2699	2390	2699
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}		<i>Nm</i>	500	500	500	500	500	500	500	500	500	500	
			<i>in.lb</i>	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)	n_{1N}		<i>rpm</i>	2000	2200	2700	3300	3400	3300	3400	3600	3900	3900	
Max. input speed	n_{1Max}		<i>rpm</i>	6000	6000	7000	7000	7000	7000	7000	7000	7000	7000	
Mean no load running torque ^{b)} (at n_1 =3000 rpm and 20 °C gearbox temperature)	T_{012}		<i>Nm</i>	3.3	2.7	1.7	1.4	1.2	1.2	1.1	0.93	0.88	0.81	
			<i>in.lb</i>	29	24	15	12	11	11	9.7	8.2	7.8	7.2	
Max. backlash	j_t		<i>arcmin</i>	≤ 8		≤ 10								
Torsional rigidity ^{b)}	C_{t21}		<i>Nm/arcmin</i>	30	30	30	30	30	30	30	30	30	30	
			<i>in.lb/arcmin</i>	266	266	266	266	266	266	266	266	266	266	266
Max. axial force ^{c)}	F_{2AMax}		<i>N</i>	5650		5650								
			<i>lb_f</i>	1271		1271								
Max. lateral force ^{c)}	F_{2QMax}		<i>N</i>	6600		6600								
			<i>lb_f</i>	1485		1485								
Max. tilting moment	M_{2KMax}		<i>Nm</i>	487		487								
			<i>in.lb</i>	4310		4310								
Efficiency at full load	η		%	97		95								
Service life	L_h		<i>h</i>	> 20000		> 20000								
Weight (incl. standard adapter plate)	m		<i>kg</i>	9.1		9.5								
			<i>lb_m</i>	20		21								
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}		<i>dB(A)</i>	≤ 65		≤ 61								
Max. permitted housing temperature			°C	+90		+90								
			°F	+194		+194								
Ambient temperature			°C	−15 to +40		−15 to +40								
			°F	+5 to +104		+5 to +104								
Lubrication				Lubricated for life										
Direction of rotation				In- and output same direction										
Protection class				IP 65										
Elastomer coupling (recommended product type – validate sizing with cymex®)				ELC-0150BA032.000-X										
Bore diameter of coupling on the application side			<i>mm</i>	X = 019.000 - 036.000										
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	C	14	J_1	<i>kgcm²</i>	–	–	0.6	0.59	0.6	0.43	0.42	0.37	0.52	0.36
				<i>10⁻³ in.lb.s²</i>	–	–	0.53	0.52	0.53	0.38	0.37	0.33	0.46	0.32
	D	16	J_1	<i>kgcm²</i>	–	–	0.75	0.74	0.74	0.58	0.57	0.5	0.67	0.51
				<i>10⁻³ in.lb.s²</i>	–	–	0.66	0.65	0.65	0.51	0.5	0.44	0.59	0.45
	E	19	J_1	<i>kgcm²</i>	2.5	1.7	0.84	0.83	0.83	0.66	0.65	0.6	0.75	0.6
				<i>10⁻³ in.lb.s²</i>	2.2	1.5	0.74	0.73	0.73	0.58	0.58	0.53	0.66	0.53
	G	24	J_1	<i>kgcm²</i>	3.3	2.4	1.9	1.9	1.9	1.7	1.7	1.6	1.8	1.6
				<i>10⁻³ in.lb.s²</i>	2.9	2.1	1.7	1.6	1.7	1.5	1.5	1.5	1.6	1.4
	H	28	J_1	<i>kgcm²</i>	3	2.2	1.6	1.6	1.6	1.4	1.4	1.3	1.5	1.3
				<i>10⁻³ in.lb.s²</i>	2.7	1.9	1.4	1.4	1.4	1.2	1.2	1.2	1.3	1.2
	I	32	J_1	<i>kgcm²</i>	7.1	6.2	–	–	–	–	–	–	–	–
				<i>10⁻³ in.lb.s²</i>	6.3	5.5	–	–	–	–	–	–	–	–
	K	38	J_1	<i>kgcm²</i>	8.3	7.4	–	–	–	–	–	–	–	–
				<i>10⁻³ in.lb.s²</i>	7.3	6.5	–	–	–	–	–	–	–	–

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Valid for: Smooth shaft

1-stage

up to 24⁴⁾ / 28⁴⁾
(G⁵⁾/H)
clamping hub
diameter


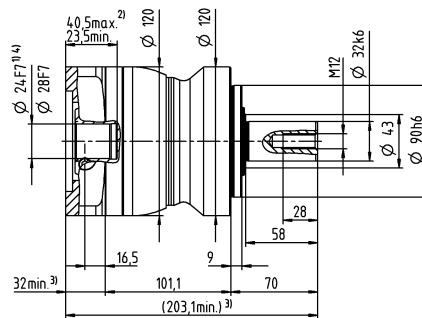



up to 38⁴⁾ (K)
clamping hub
diameter


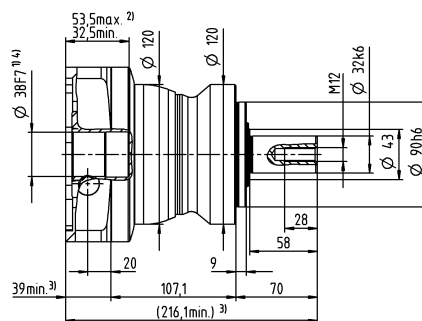



2-stage

up to 19⁴⁾ (E)⁵⁾
clamping hub
diameter

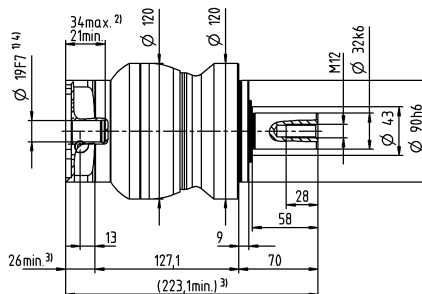

up to 28⁴⁾ (H)
clamping hub
diameter

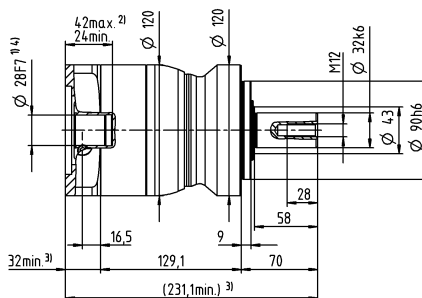



Motor shaft diameter [mm]

Other output variants

Shaft with key

Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated

by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPS 015 MF 1-stage

				1-stage						
Ratio		i		3	4	5	7	8	10	
Max. torque ^{a) b) e)}		T_{2a}	Nm	51	56	64	64	56	56	
			$in.lb$	451	496	566	566	496	496	
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)		T_{2B}	Nm	32	35	40	40	35	35	
			$in.lb$	283	310	354	354	310	310	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)		T_{2Not}	Nm	80	80	80	80	80	80	
			$in.lb$	708	708	708	708	708	708	
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)		n_{1N}	rpm	2900	3100	3300	3600	3600	3800	
Max. input speed		n_{1Max}	rpm	8000	8000	8000	8000	8000	8000	
Mean no load running torque ^{b)} (at n_1 = 3000 rpm and 20 °C gearbox temperature)		T_{012}	Nm	0.92	0.74	0.62	0.51	0.47	0.41	
			$in.lb$	8.1	6.5	5.5	4.5	4.2	3.6	
Max. backlash		j_t	$arcmin$	≤ 8						
Torsional rigidity ^{b)}		C_{t21}	$Nm/arcmin$	3.3	3.3	3.3	3.3	2.8	2.8	
			$in.lb/arcmin$	29	29	29	29	25	25	
Max. axial force ^{c)}		F_{2AMax}	N	2400						
			lb_f	540						
Max. lateral force ^{c)}		F_{2QMMax}	N	2800						
			lb_f	630						
Max. tilting moment		M_{2KMMax}	Nm	152						
			$in.lb$	1345						
Efficiency at full load		η	%	97						
Service life		L_h	h	> 20000						
Weight (incl. standard adapter plate)		m	kg	1.8						
			lb_m	4						
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)		L_{PA}	$dB(A)$	≤ 59						
Max. permitted housing temperature			°C	+90						
			°F	+194						
Ambient temperature			°C	–15 to +40						
			°F	+5 to +104						
Lubrication				Lubricated for life						
Direction of rotation				In- and output same direction						
Protection class				IP 65						
Elastomer coupling (recommended product type – validate sizing with cymex®)				ELC-0060BA016.000-X						
Bore diameter of coupling on the application side			mm	X = 012.000 - 032.000						
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	A	9	J_1	$kgcm^2$	0.25	0.19	0.17	0.14	0.14	0.13
				$10^{-3} in.lb.s^2$	0.22	0.17	0.15	0.12	0.12	0.12
	B	11	J_1	$kgcm^2$	0.26	0.21	0.18	0.16	0.16	0.15
				$10^{-3} in.lb.s^2$	0.23	0.19	0.16	0.14	0.14	0.13
	C	14	J_1	$kgcm^2$	0.34	0.28	0.26	0.24	0.23	0.23
				$10^{-3} in.lb.s^2$	0.3	0.25	0.23	0.21	0.2	0.2
	D	16	J_1	$kgcm^2$	0.47	0.41	0.39	0.36	0.36	0.35
				$10^{-3} in.lb.s^2$	0.42	0.36	0.35	0.32	0.32	0.31
E	19	J_1	$kgcm^2$	0.55	0.49	0.47	0.45	0.44	0.44	
			$10^{-3} in.lb.s^2$	0.49	0.43	0.42	0.4	0.39	0.39	

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange


^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft






1-stage

Motor shaft diameter [mm]

up to 14⁴⁾ (C)⁵⁾
clamping hub
diameter





up to 19⁴⁾ (E)
clamping hub
diameter

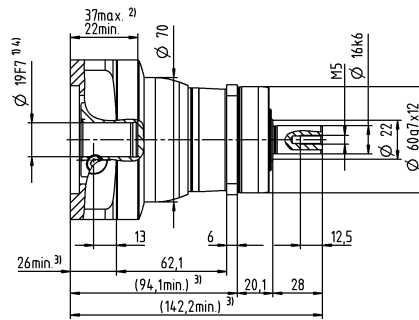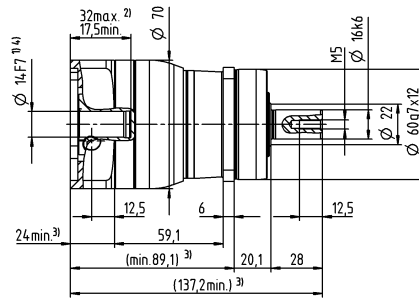

Other output variants

Shaft with key

Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPS 015 MF 2-stage

			2-stage													
Ratio	i		12	15	16	20	25	28	30	32	35	40	50	64	70	100
Max. torque ^{a) b) e)}	T_{2a}	Nm	51	51	56	56	64	56	51	56	64	56	64	56	64	56
		in.lb	451	451	496	496	566	496	451	496	566	496	566	496	566	496
Max. acceleration torque ^{a)} (max. 1000 cycles per hour)	T_{2B}	Nm	32	32	35	35	40	35	32	35	40	35	40	35	40	35
		in.lb	283	283	310	310	354	310	283	310	354	310	354	310	354	310
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	80	80	80	80	80	80	80	80	80	80	80	80	80	80
		in.lb	708	708	708	708	708	708	708	708	708	708	708	708	708	708
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}	rpm	3800	4000	3800	4000	4000	4300	4600	4400	4300	4600	4600	4400	4600	4600
Max. input speed	n_{1Max}	rpm	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000
Mean no load running torque ^{b)} (at $n_1=3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	0.34	0.29	0.29	0.25	0.23	0.21	0.21	0.2	0.2	0.19	0.17	0.17	0.16	0.15
		in.lb	3	2.6	2.6	2.2	2	1.9	1.9	1.8	1.8	1.7	1.5	1.5	1.4	1.3
Max. backlash	j_t	arcmin	≤ 10													
Torsional rigidity ^{b)}	C_{t21}	Nm/arcmin	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	2.8	3.3	2.8
		in.lb/arcmin	29	29	29	29	29	29	29	29	29	29	29	25	29	25
Max. axial force ^{c)}	F_{2AMax}	N	2400													
		lb _f	540													
Max. lateral force ^{c)}	F_{2QMMax}	N	2800													
		lb _f	630													
Max. tilting moment	M_{2KMMax}	Nm	152													
		in.lb	1345													
Efficiency at full load	η	%	95													
Service life	L_h	h	> 20000													
Weight (incl. standard adapter plate)	m	kg	1.9													
		lb _m	4.2													
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex [®])	L_{PA}	dB(A)	≤ 58													
Max. permitted housing temperature		°C	+90													
		°F	+194													
Ambient temperature		°C	-15 to +40													
		°F	+5 to +104													
Lubrication			Lubricated for life													
Direction of rotation			In- and output same direction													
Protection class			IP 65													
Elastomer coupling (recommended product type – validate sizing with cymex [®])			ELC-0060BA016.000-X													
Bore diameter of coupling on the application side		mm	X = 012.000 - 032.000													
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	Z	8	J_1	$kgcm^2$	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02
				$10^{-3} in.lb.s^2$	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02
	A	9	J_1	$kgcm^2$	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02
				$10^{-3} in.lb.s^2$	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02
	B	11	J_1	$kgcm^2$	0.06	0.06	0.05	0.05	0.05	0.05	0.05	0.04	0.05	0.04	0.04	0.04
				$10^{-3} in.lb.s^2$	0.05	0.05	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04
	C	14	J_1	$kgcm^2$	0.14	0.14	0.14	0.13	0.13	0.13	0.14	0.13	0.13	0.13	0.13	0.13
				$10^{-3} in.lb.s^2$	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12

Please use our sizing software cymex[®] for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Valid for: Smooth shaft

2-stage

up to 11⁴⁾ (B)⁵⁾
clamping hub
diameter

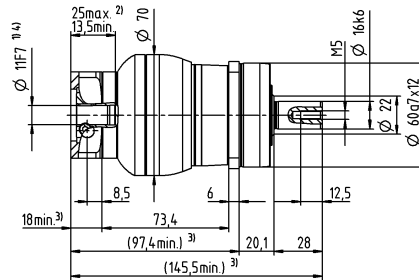

up to 14⁴⁾ (C)
clamping hub
diameter

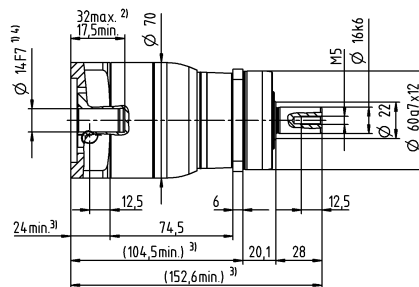



Motor shaft diameter [mm]

Planetary Gearboxes
Value Line

Other output variants

Shaft with key

Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPS 025 MF 1-stage

				1-stage						
Ratio		i		3	4	5	7	8	10	
Max. torque ^{a) b) e)}		T_{2a}	Nm	128	152	160	160	144	144	
			$in.lb$	1133	1345	1416	1416	1275	1275	
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)		T_{2B}	Nm	80	95	100	100	90	90	
			$in.lb$	708	841	885	885	797	797	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)		T_{2Not}	Nm	190	190	190	190	190	190	
			$in.lb$	1682	1682	1682	1682	1682	1682	
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)		n_{1N}	rpm	2700	2900	3000	3200	3300	3500	
Max. input speed		n_{1Max}	rpm	7000	7000	7000	7000	7000	7000	
Mean no load running torque ^{b)} (at n_1 = 3000 rpm and 20 °C gearbox temperature)		T_{012}	Nm	1.8	1.5	1.3	1.1	1	0.94	
			$in.lb$	16	13	12	9.7	8.9	8.3	
Max. backlash		j_t	$arcmin$	≤ 8						
Torsional rigidity ^{b)}		C_{t21}	$Nm/arcmin$	9.5	9.5	9.5	9.5	8.5	8.5	
			$in.lb/arcmin$	84	84	84	84	75	75	
Max. axial force ^{c)}		F_{2AMax}	N	3350						
			lb_f	754						
Max. lateral force ^{c)}		F_{2QMMax}	N	4200						
			lb_f	945						
Max. tilting moment		M_{2KMMax}	Nm	236						
			$in.lb$	2089						
Efficiency at full load		η	%	97						
Service life		L_h	h	> 20000						
Weight (incl. standard adapter plate)		m	kg	3.6						
			lb_m	8						
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)		L_{PA}	$dB(A)$	≤ 61						
Max. permitted housing temperature			°C	+90						
			°F	+194						
Ambient temperature			°C	–15 to +40						
			°F	+5 to +104						
Lubrication				Lubricated for life						
Direction of rotation				In- and output same direction						
Protection class				IP 65						
Elastomer coupling (recommended product type – validate sizing with cymex®)				ELC-0060BA022.000-X						
Bore diameter of coupling on the application side			mm	X = 012.000 - 032.000						
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	C	14	J_1	$kgcm^2$	0.58	0.47	0.38	0.3	0.28	0.26
				$10^{-3} in.lb.s^2$	0.51	0.42	0.34	0.27	0.25	0.23
	D	16	J_1	$kgcm^2$	0.73	0.62	0.53	0.43	0.42	0.4
				$10^{-3} in.lb.s^2$	0.65	0.55	0.47	0.38	0.37	0.35
	E	19	J_1	$kgcm^2$	0.81	0.71	0.61	0.53	0.51	0.49
				$10^{-3} in.lb.s^2$	0.72	0.63	0.54	0.47	0.45	0.43
	G	24	J_1	$kgcm^2$	1.8	1.7	1.6	1.6	1.5	1.5
				$10^{-3} in.lb.s^2$	1.6	1.5	1.4	1.4	1.3	1.3
H	28	J_1	$kgcm^2$	1.6	1.4	1.4	1.3	1.3	1.2	
			$10^{-3} in.lb.s^2$	1.4	1.2	1.2	1.2	1.2	1.1	

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Valid for: Smooth shaft

1-stage

up to 19⁴⁾ (E)⁵⁾
clamping hub
diameter

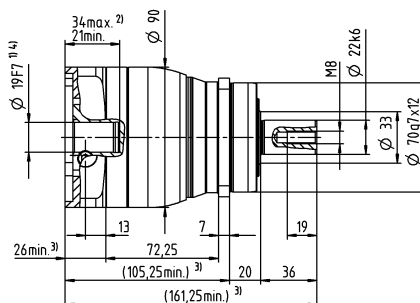

up to 28⁴⁾ (H)
clamping hub
diameter

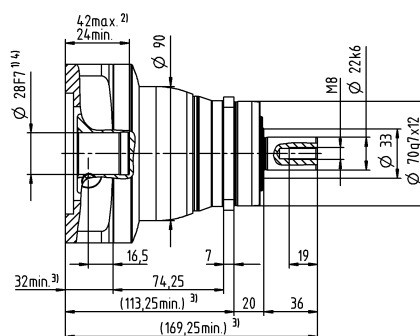


Motor shaft diameter [mm]


Planetary Gearboxes
Value Line

Other output variants

Shaft with key



Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated

by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPS 025 MF 2-stage

			2-stage														
Ratio	i		9	12	15	16	20	25	28	30	32	35	40	50	64	70	100
Max. torque ^{a) b) e)}	T_{2a}	Nm	128	128	128	152	152	160	152	128	144	160	152	160	144	160	144
		in.lb	1133	1133	1133	1345	1345	1416	1345	1133	1275	1416	1345	1416	1275	1416	1275
Max. acceleration torque ^{a)} (max. 1000 cycles per hour)	T_{2B}	Nm	80	80	80	95	95	100	95	80	90	100	95	100	90	100	90
		in.lb	708	708	708	841	841	885	841	708	797	885	841	885	797	885	797
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	190	190	190	190	190	190	190	190	190	190	190	190	190	190	190
		in.lb	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}	rpm	2900	3500	3700	3500	3700	3700	4000	4300	4100	4000	4300	4300	4100	4300	4300
Max. input speed	n_{1Max}	rpm	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000
Mean no load running torque ^{b)} (at $n_1 = 3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	0.67	0.55	0.47	0.46	0.4	0.36	0.34	0.33	0.32	0.31	0.29	0.27	0.25	0.25	0.23
		in.lb	5.9	4.9	4.2	4.1	3.5	3.2	3	2.9	2.8	2.7	2.6	2.4	2.2	2.2	2
Max. backlash	j_t	arcmin	≤ 10														
Torsional rigidity ^{b)}	C_{t21}	Nm/arcmin	10	10	10	10	10	9.5	10	10	10	9.5	10	9.5	8.5	9.5	8.5
		in.lb/arcmin	89	89	89	89	89	84	89	89	89	84	89	84	75	84	75
Max. axial force ^{c)}	F_{2AMax}	N	3350														
		lb _f	754														
Max. lateral force ^{c)}	F_{2QMMax}	N	4200														
		lb _f	945														
Max. tilting moment	M_{2KMMax}	Nm	236														
		in.lb	2089														
Efficiency at full load	η	%	95														
Service life	L_h	h	> 20000														
Weight (incl. standard adapter plate)	m	kg	3.9														
		lb _m	8.6														
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 59														
Max. permitted housing temperature		°C	+90														
		°F	+194														
Ambient temperature		°C	-15 to +40														
		°F	+5 to +104														
Lubrication			Lubricated for life														
Direction of rotation			In- and output same direction														
Protection class			IP 65														
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0060BA022.000-X														
Bore diameter of coupling on the application side		mm	X = 012.000 - 032.000														
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	A	9	J_1	kgcm ²	0.26	0.22	0.21	0.21	0.2	0.2	0.19	0.19	0.19	0.19	0.19	0.19	0.19
				10 ⁻³ in.lb.s ²	0.23	0.19	0.19	0.19	0.18	0.18	0.17	0.17	0.17	0.17	0.17	0.17	0.17
	B	11	J_1	kgcm ²	0.28	0.24	0.23	0.23	0.22	0.22	0.21	0.21	0.21	0.21	0.21	0.21	0.21
				10 ⁻³ in.lb.s ²	0.25	0.21	0.2	0.2	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.19
	C	14	J_1	kgcm ²	0.35	0.31	0.3	0.3	0.3	0.29	0.29	0.28	0.28	0.28	0.28	0.28	0.28
				10 ⁻³ in.lb.s ²	0.31	0.27	0.27	0.27	0.27	0.26	0.26	0.25	0.25	0.25	0.25	0.25	0.25
	D	16	J_1	kgcm ²	0.48	0.44	0.43	0.43	0.42	0.42	0.41	0.41	0.41	0.41	0.41	0.41	0.41
				10 ⁻³ in.lb.s ²	0.42	0.39	0.38	0.38	0.37	0.37	0.36	0.36	0.36	0.36	0.36	0.36	0.36
	E	19	J_1	kgcm ²	0.56	0.52	0.51	0.52	0.51	0.5	0.5	0.5	0.5	0.5	0.49	0.49	0.49
				10 ⁻³ in.lb.s ²	0.5	0.46	0.45	0.46	0.45	0.44	0.44	0.44	0.44	0.43	0.43	0.43	0.43

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Valid for: Smooth shaft

2-stage

up to 14⁴⁾ (C)⁵⁾
clamping hub
diameter

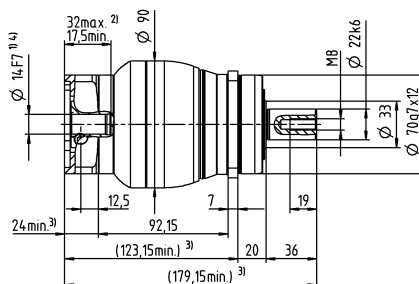

up to 19⁴⁾ (E)
clamping hub
diameter

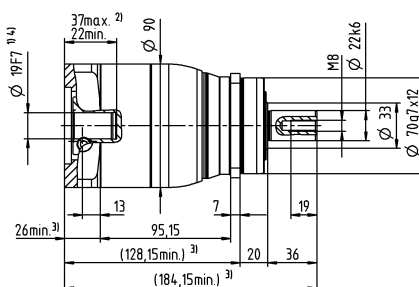



Motor shaft diameter [mm]

Planetary Gearboxes
Value Line

Other output variants

Shaft with key

Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPS 035 MF 1-stage

				1-stage						
Ratio	i			3	4	5	7	8	10	
Max. torque ^{a) b) e)}	T_{2a}		Nm	320	408	400	400	352	352	
			in.lb	2832	3611	3540	3540	3115	3115	
Max. acceleration torque ^{a)} (max. 1000 cycles per hour)	T_{2B}		Nm	200	255	250	250	220	220	
			in.lb	1770	2257	2213	2213	1947	1947	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}		Nm	500	500	500	500	500	500	
			in.lb	4425	4425	4425	4425	4425	4425	
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)	n_{1N}		rpm	2000	2200	2300	2500	2600	2700	
Max. input speed	n_{1Max}		rpm	6000	6000	6000	6000	6000	6000	
Mean no load running torque ^{b)} (at n_1 = 3000 rpm and 20 °C gearbox temperature)	T_{012}		Nm	3.3	2.7	2.3	1.9	1.7	1.5	
			in.lb	29	24	20	17	15	13	
Max. backlash	j_t		arcmin	≤ 8						
Torsional rigidity ^{b)}	C_{t21}		Nm/arcmin	25	25	25	25	22	22	
			in.lb/arcmin	221	221	221	221	195	195	
Max. axial force ^{c)}	F_{2AMax}		N	5650						
			lb _f	1271						
Max. lateral force ^{c)}	F_{2QMMax}		N	6600						
			lb _f	1485						
Max. tilting moment	M_{2KMax}		Nm	487						
			in.lb	4310						
Efficiency at full load	η		%	97						
Service life	L_h		h	> 20000						
Weight (incl. standard adapter plate)	m		kg	8.4						
			lb _m	19						
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}		dB(A)	≤ 65						
Max. permitted housing temperature			°C	+90						
			°F	+194						
Ambient temperature			°C	–15 to +40						
			°F	+5 to +104						
Lubrication				Lubricated for life						
Direction of rotation				In- and output same direction						
Protection class				IP 65						
Elastomer coupling (recommended product type – validate sizing with cymex®)				ELC-0150BA032.000-X						
Bore diameter of coupling on the application side			mm	X = 019.000 - 036.000						
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	E	19	J_1	kgcm ²	2.5	1.7	1.3	1	0.94	0.87
				10 ⁻³ in.lb.s ²	2.2	1.5	1.2	0.89	0.83	0.77
	G	24	J_1	kgcm ²	3.3	2.4	2.1	1.8	1.7	1.6
				10 ⁻³ in.lb.s ²	2.9	2.1	1.9	1.6	1.5	1.4
	H	28	J_1	kgcm ²	3	2.2	1.8	1.5	1.4	1.4
				10 ⁻³ in.lb.s ²	2.7	1.9	1.6	1.3	1.2	1.2
	I	32	J_1	kgcm ²	7.1	6.2	5.9	5.6	5.5	5.4
				10 ⁻³ in.lb.s ²	6.3	5.5	5.2	5	4.9	4.8
	K	38	J_1	kgcm ²	8.3	7.4	7.1	6.7	6.6	6.6
				10 ⁻³ in.lb.s ²	7.3	6.5	6.3	5.9	5.8	5.8

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter


^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft






1-stage

up to 24/28⁴⁾
(G⁵⁾/H)
clamping hub
diameter



1-stage



up to 38⁴⁾ (K)
clamping hub
diameter

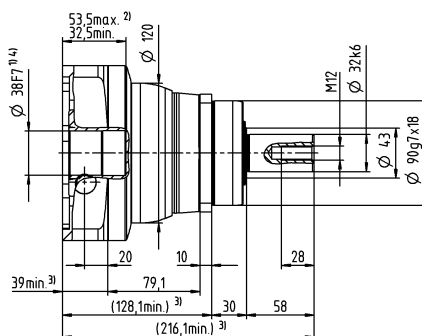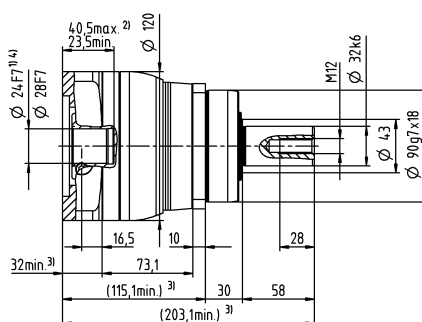

Other output variants

Shaft with key

Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPS 035 MF 2-stage

				2-stage															
Ratio	i			9	12	15	16	20	25	28	30	32	35	40	50	64	70	100	
Max. torque ^{a) b) e)}		T_{2a}	<i>Nm</i>	320	320	320	408	408	400	408	320	408	400	408	400	352	400	352	
			<i>in.lb</i>	2832	2832	2832	3611	3611	3540	3611	2832	3611	3540	3611	3540	3115	3540	3115	
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)		T_{2B}	<i>Nm</i>	200	200	200	255	255	250	255	200	255	250	255	250	220	250	220	
			<i>in.lb</i>	1770	1770	1770	2257	2257	2213	2257	1770	2257	2213	2257	2213	1947	2213	1947	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)		T_{2Not}	<i>Nm</i>	500	500	500	500	500	500	500	500	500	500	500	500	500	500	500	
			<i>in.lb</i>	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425	
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)		n_{1N}	<i>rpm</i>	2700	3300	3400	3300	3400	3400	3600	3900	3700	3600	3900	3900	3700	3900	3900	
Max. input speed		n_{1Max}	<i>rpm</i>	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	
Mean no load running torque ^{b)} (at n_1 = 3000 rpm and 20 °C gearbox temperature)		T_{012}	<i>Nm</i>	1.7	1.4	1.2	1.2	1.1	1	0.93	0.88	0.88	0.87	0.81	0.77	0.75	0.72	0.68	
			<i>in.lb</i>	15	12	11	11	9.7	8.9	8.2	7.8	7.8	7.7	7.2	6.8	6.6	6.4	6	
Max. backlash		j_t	<i>arcmin</i>	≤ 10															
Torsional rigidity ^{b)}		C_{t21}	<i>Nm/arcmin</i>	25	25	25	25	25	25	25	25	25	25	25	25	22	25	22	
			<i>in.lb/arcmin</i>	221	221	221	221	221	221	221	221	221	221	221	221	221	195	221	195
Max. axial force ^{c)}		F_{2AMax}	<i>N</i>	5650															
			<i>lb_f</i>	1271															
Max. lateral force ^{c)}		F_{2QMax}	<i>N</i>	6600															
			<i>lb_f</i>	1485															
Max. tilting moment		M_{2KMax}	<i>Nm</i>	487															
			<i>in.lb</i>	4310															
Efficiency at full load		η	%	95															
Service life		L_h	<i>h</i>	> 20000															
Weight (incl. standard adapter plate)		m	<i>kg</i>	8.8															
			<i>lb_m</i>	19															
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)		L_{PA}	<i>dB(A)</i>	≤ 61															
Max. permitted housing temperature			°C	+90															
			°F	+194															
Ambient temperature			°C	–15 to +40															
			°F	+5 to +104															
Lubrication				Lubricated for life															
Direction of rotation (relates to the drive)				In- and output same direction															
Protection class				IP 65															
Elastomer coupling (recommended product type – validate sizing with cymex®)				ELC-0150BA032.000-X															
Bore diameter of coupling on the application side			<i>mm</i>	X = 019.000 - 036.000															
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	C	14	J_1	<i>kgcm²</i>	0.6	0.59	0.6	0.43	0.42	0.36	0.37	0.52	0.38	0.32	0.36	0.31	0.26	0.27	0.24
				<i>10⁻³ in.lb.s²</i>	0.53	0.52	0.53	0.38	0.37	0.32	0.33	0.46	0.34	0.28	0.32	0.27	0.23	0.24	0.21
	D	16	J_1	<i>kgcm²</i>	0.75	0.74	0.74	0.58	0.57	0.5	0.5	0.67	0.52	0.45	0.51	0.46	0.4	0.41	0.39
				<i>10⁻³ in.lb.s²</i>	0.66	0.65	0.65	0.51	0.5	0.44	0.44	0.59	0.46	0.4	0.45	0.41	0.35	0.36	0.35
	E	19	J_1	<i>kgcm²</i>	0.84	0.83	0.83	0.66	0.65	0.59	0.6	0.75	0.61	0.55	0.6	0.54	0.49	0.5	0.48
				<i>10⁻³ in.lb.s²</i>	0.74	0.73	0.73	0.58	0.58	0.52	0.53	0.66	0.54	0.49	0.53	0.48	0.43	0.44	0.42
	G	24	J_1	<i>kgcm²</i>	1.9	1.9	1.9	1.7	1.7	1.6	1.6	1.8	1.6	1.6	1.6	1.6	1.5	1.5	1.5
				<i>10⁻³ in.lb.s²</i>	1.7	1.6	1.7	1.5	1.5	1.4	1.5	1.6	1.5	1.4	1.4	1.4	1.3	1.4	1.3
	H	28	J_1	<i>kgcm²</i>	1.6	1.6	1.6	1.4	1.4	1.3	1.3	1.5	1.4	1.3	1.3	1.3	1.2	1.2	1.2
				<i>10⁻³ in.lb.s²</i>	1.4	1.4	1.4	1.2	1.2	1.2	1.2	1.3	1.2	1.1	1.2	1.1	1.1	1.1	1.1

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Valid for: Smooth shaft

2-stage

up to 19⁴⁾ (E)⁵⁾
clamping hub
diameter

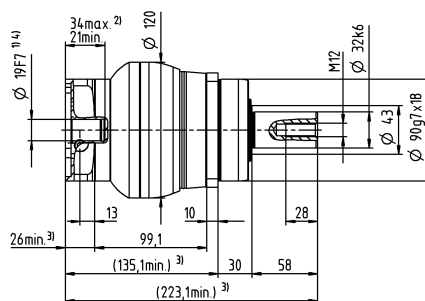

up to 28⁴⁾ (H)
clamping hub
diameter

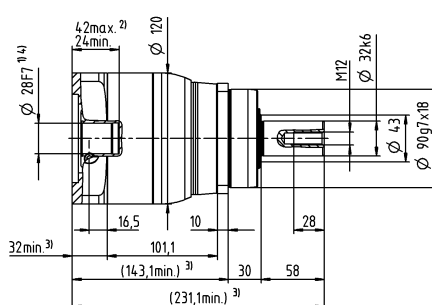



Motor shaft diameter [mm]

Planetary Gearboxes
Value Line

Other output variants

Shaft with key

Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPS 045 MF 1-/2-stage

				1-stage			2-stage					
Ratio		i		5	8	10	25	32	50	64	100	
Max. torque ^{a) b) e)}		T_{2a}	Nm	800	640	640	700	640	700	640	640	
			in.lb	7081	5665	5665	6196	5665	6196	5665	5665	
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)		T_{2B}	Nm	500	400	400	500	400	500	400	400	
			in.lb	4425	3540	3540	4425	3540	4425	3540	3540	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)		T_{2Not}	Nm	1000	1000	1000	1000	1000	1000	1000	1000	
			in.lb	8851	8851	8851	8851	8851	8851	8851	8851	
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)		n_{1N}	rpm	1800	1900	2000	2600	2500	3000	2900	3000	
Max. input speed		n_{1Max}	rpm	4000	4000	4000	6000	6000	6000	6000	6000	
Mean no load running torque ^{b)} (at n_1 = 3000 rpm and 20 °C gearbox temperature)		T_{012}	Nm	4.2	3	2.6	1.6	1.5	1.2	1.1	0.97	
			in.lb	37	27	23	14	13	11	9.7	8.6	
Max. backlash		j_t	arcmin	≤ 8			≤ 10					
Torsional rigidity ^{b)}		C_{t21}	Nm/arcmin	55	44	44	55	44	55	44	44	
			in.lb/arcmin	487	389	389	487	389	487	389	389	
Max. axial force ^{c)}		F_{2AMax}	N	9870			9870					
			lb _f	2221			2221					
Max. lateral force ^{c)}		F_{2QMMax}	N	9900			9900					
			lb _f	2228			2228					
Max. tilting moment		M_{2KMMax}	Nm	952			952					
			in.lb	8426			8426					
Efficiency at full load		η	%	97			95					
Service life		L_h	h	> 20000			> 20000					
Weight (incl. standard adapter plate)		m	kg	19			19					
			lb _m	42			42					
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)		L_{PA}	dB(A)	≤ 68			≤ 65					
Max. permitted housing temperature			°C	+90			+90					
			°F	+194			+194					
Ambient temperature			°C	–15 to +40			–15 to +40					
			°F	+5 to +104			+5 to +104					
Lubrication				Lubricated for life								
Direction of rotation				In- and output same direction								
Protection class				IP 65								
Elastomer coupling (recommended product type – validate sizing with cymex®)				ELC-0300BA040.000-X								
Bore diameter of coupling on the application side			mm	X = 020.000 - 045.000								
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	E	19	J_1	kgcm ²	–	–	–	1.2	1.1	1	0.88	0.82
				10 ⁻³ in.lb.s ²	–	–	–	1.1	0.97	0.89	0.78	0.73
	G	24	J_1	kgcm ²	–	–	–	2	1.9	1.8	1.7	1.6
				10 ⁻³ in.lb.s ²	–	–	–	1.8	1.7	1.6	1.5	1.4
	H	28	J_1	kgcm ²	–	–	–	1.7	1.6	1.5	1.4	1.3
				10 ⁻³ in.lb.s ²	–	–	–	1.5	1.4	1.3	1.2	1.2
	I	32	J_1	kgcm ²	–	–	–	5.8	5.7	5.6	5.4	5.4
				10 ⁻³ in.lb.s ²	–	–	–	5.1	5	5	4.8	4.8
K	38	J_1	kgcm ²	8.7	7.3	7.2	7	6.9	6.8	6.6	6.5	
			10 ⁻³ in.lb.s ²	7.7	6.5	6.4	6.2	6.1	6	5.8	5.8	

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft







1-stage

up to 38⁴⁾ (K)⁵⁾
clamping hub
diameter

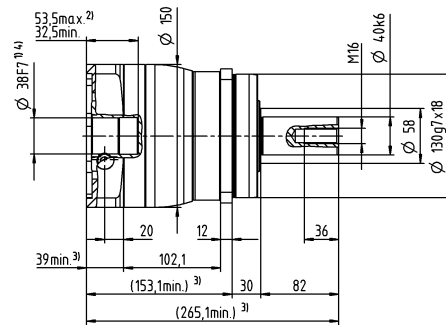

2-stage

up to 28⁴⁾ (H)⁵⁾
clamping hub
diameter

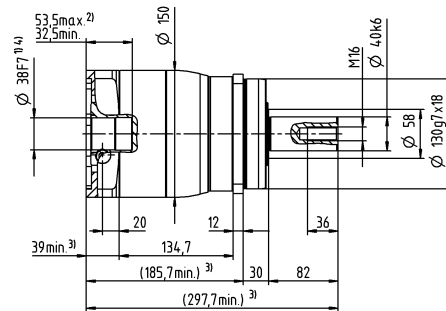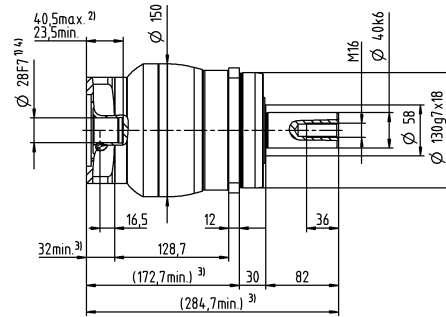



Motor shaft diameter [mm]

up to 38⁴⁾ (K)⁵⁾
clamping hub
diameter

Other output variants

Shaft with key

Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPS 015 MA 1-/2-stage

				1-stage		2-stage							
Ratio		i		3	4	12	15	16	20	28	30	40	
Max. torque ^{a) b) e)}		T_{2a}	Nm	80	67	62	67	67	67	67	62	67	
			in.lb	708	593	549	593	593	593	593	549	593	
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)		T_{2B}	Nm	55	42	39	42	42	42	42	39	42	
			in.lb	487	372	345	372	372	372	372	345	372	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)		T_{2Not}	Nm	80	80	80	80	80	80	80	80	80	
			in.lb	708	708	708	708	708	708	708	708	708	
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)		n_{1N}	rpm	2900	3100	3800	4000	3800	4000	4300	4600	4600	
Max. input speed		n_{1Max}	rpm	8000	8000	10000	10000	10000	10000	10000	10000	10000	
Mean no load running torque ^{b)} (at n_1 =3000 rpm and 20 °C gearbox temperature)		T_{012}	Nm	0.92	0.74	0.34	0.29	0.29	0.25	0.21	0.21	0.19	
			in.lb	8.1	6.5	3	2.6	2.6	2.2	1.9	1.9	1.7	
Max. backlash		j_t	arcmin	≤ 8		≤ 10							
Torsional rigidity ^{b)}		C_{t21}	Nm/arcmin	4	4	4	4	4	4	4	4	4	
			in.lb/arcmin	35	35	35	35	35	35	35	35	35	
Max. axial force ^{c)}		F_{2AMax}	N	2400		2400							
			lb _f	540		540							
Max. lateral force ^{c)}		F_{2QMax}	N	2800		2800							
			lb _f	630		630							
Max. tilting moment		M_{2KMMax}	Nm	152		152							
			in.lb	1345		1345							
Efficiency at full load		η	%	97		95							
Service life		L_h	h	> 20000		> 20000							
Weight (incl. standard adapter plate)		m	kg	1.8		1.9							
			lb _m	4		4.2							
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)		L_{PA}	dB(A)	≤ 59		≤ 58							
Max. permitted housing temperature			°C	+90		+90							
			°F	+194		+194							
Ambient temperature			°C	–15 to +40		–15 to +40							
			°F	+5 to +104		+5 to +104							
Lubrication				Lubricated for life									
Direction of rotation				In- and output same direction									
Protection class				IP 65									
Elastomer coupling (recommended product type – validate sizing with cymex®)				ELC-0060BA016.000-X									
Bore diameter of coupling on the application side			mm	X = 012.000 - 032.000									
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	Z	8	J_1	kgcm ²	–	–	0.04	0.04	0.03	0.03	0.03	0.03	0.03
				10 ⁻³ in.lb.s ²	–	–	0.04	0.04	0.03	0.03	0.03	0.03	0.03
	A	9	J_1	kgcm ²	0.25	0.19	0.04	0.04	0.03	0.03	0.03	0.03	
				10 ⁻³ in.lb.s ²	0.22	0.17	0.04	0.04	0.03	0.03	0.03	0.03	0.03
	B	11	J_1	kgcm ²	0.26	0.21	0.06	0.06	0.05	0.05	0.05	0.05	
				10 ⁻³ in.lb.s ²	0.23	0.19	0.05	0.05	0.04	0.04	0.04	0.04	0.04
	C	14	J_1	kgcm ²	0.34	0.28	0.14	0.14	0.14	0.13	0.13	0.14	0.13
				10 ⁻³ in.lb.s ²	0.3	0.25	0.12	0.12	0.12	0.12	0.12	0.12	0.12
	D	16	J_1	kgcm ²	0.47	0.41	–	–	–	–	–	–	–
				10 ⁻³ in.lb.s ²	0.42	0.36	–	–	–	–	–	–	–
	E	19	J_1	kgcm ²	0.55	0.49	–	–	–	–	–	–	–
				10 ⁻³ in.lb.s ²	0.49	0.43	–	–	–	–	–	–	–

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Valid for: Smooth shaft

1-stage

up to 14⁴⁾ (C)⁵⁾
clamping hub
diameter


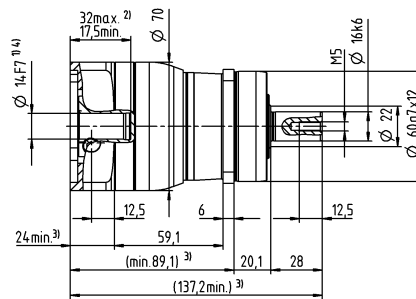



up to 19⁴⁾ (E)
clamping hub
diameter


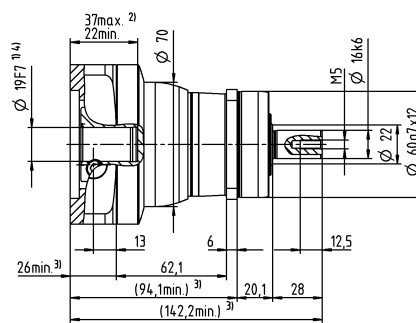



2-stage

up to 11⁴⁾ (B)⁵⁾
clamping hub
diameter

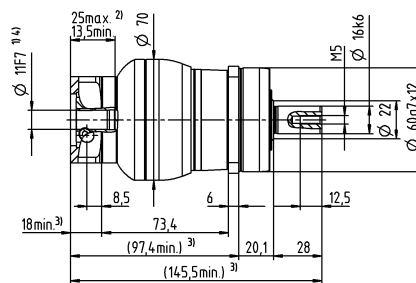


up to 14⁴⁾ (C)
clamping hub
diameter

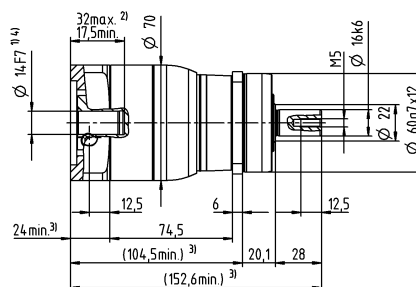


Motor shaft diameter [mm]

Other output variants

Shaft with key



Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPS 025 MA 1-/2-stage

			1-stage		2-stage									
Ratio	i		3	4	9	12	15	16	20	28	30	40		
Max. torque ^{a) b) e)}	T_{2a}	Nm	185	185	185	185	185	185	185	185	168	185		
		$in.lb$	1637	1637	1637	1637	1637	1637	1637	1637	1487	1637		
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}	Nm	125	115	125	125	120	115	115	115	105	115		
		$in.lb$	1106	1018	1106	1106	1062	1018	1018	1018	929	1018		
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	190	190	190	190	190	190	190	190	190	190		
		$in.lb$	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682		
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)	n_{1N}	rpm	2700	2900	2900	3500	3700	3500	3700	4000	4300	4300		
Max. input speed	n_{1Max}	rpm	7000	7000	8000	8000	8000	8000	8000	8000	8000	8000		
Mean no load running torque ^{b)} (at n_1 =3000 rpm and 20 °C gearbox temperature)	T_{012}	Nm	1.8	1.5	0.67	0.55	0.47	0.46	0.4	0.34	0.33	0.29		
		$in.lb$	16	13	5.9	4.9	4.2	4.1	3.5	3	2.9	2.6		
Max. backlash	j_t	$arcmin$	≤ 8		≤ 10									
Torsional rigidity ^{b)}	C_{t21}	$Nm/arcmin$	12	12	12	12	12	12	12	12	12	12		
		$in.lb/arcmin$	106	106	106	106	106	106	106	106	106	106		
Max. axial force ^{c)}	F_{2AMax}	N	3350		3350									
		lb_f	754		754									
Max. lateral force ^{c)}	F_{2QMax}	N	4200		4200									
		lb_f	945		945									
Max. tilting moment	M_{2KMax}	Nm	236		236									
		$in.lb$	2089		2089									
Efficiency at full load	η	%	97		95									
Service life	L_h	h	> 20000		> 20000									
Weight (incl. standard adapter plate)	m	kg	3.6		3.9									
		lb_m	8		8.6									
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	$dB(A)$	≤ 61		≤ 59									
Max. permitted housing temperature		°C	+90		+90									
		°F	+194		+194									
Ambient temperature		°C	–15 to +40		–15 to +40									
		°F	+5 to +104		+5 to +104									
Lubrication			Lubricated for life											
Direction of rotation			In- and output same direction											
Protection class			IP 65											
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0060BA022.000-X											
Bore diameter of coupling on the application side		mm	X = 012.000 - 032.000											
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	A	9	J_1	$kgcm^2$	–	–	0.26	0.22	0.21	0.21	0.2	0.19	0.19	0.19
				$10^{-3} in.lb.s^2$	–	–	0.23	0.19	0.19	0.19	0.18	0.17	0.17	0.17
	B	11	J_1	$kgcm^2$	–	–	0.28	0.24	0.23	0.23	0.22	0.21	0.21	0.21
				$10^{-3} in.lb.s^2$	–	–	0.25	0.21	0.2	0.2	0.19	0.19	0.19	0.19
	C	14	J_1	$kgcm^2$	0.58	0.47	0.35	0.31	0.3	0.3	0.3	0.29	0.28	0.28
				$10^{-3} in.lb.s^2$	0.51	0.42	0.31	0.27	0.27	0.27	0.27	0.26	0.25	0.25
	D	16	J_1	$kgcm^2$	0.73	0.62	0.48	0.44	0.43	0.43	0.42	0.41	0.41	0.41
				$10^{-3} in.lb.s^2$	0.65	0.55	0.42	0.39	0.38	0.38	0.37	0.36	0.36	0.36
	E	19	J_1	$kgcm^2$	0.81	0.71	0.56	0.52	0.51	0.52	0.51	0.5	0.5	0.49
				$10^{-3} in.lb.s^2$	0.72	0.63	0.5	0.46	0.45	0.46	0.45	0.44	0.44	0.43
	G	24	J_1	$kgcm^2$	1.8	1.7	–	–	–	–	–	–	–	–
				$10^{-3} in.lb.s^2$	1.6	1.5	–	–	–	–	–	–	–	–
	H	28	J_1	$kgcm^2$	1.6	1.4	–	–	–	–	–	–	–	–
				$10^{-3} in.lb.s^2$	1.4	1.2	–	–	–	–	–	–	–	–

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Valid for: Smooth shaft

1-stage

up to 19⁴⁾ (E)⁵⁾
clamping hub
diameter


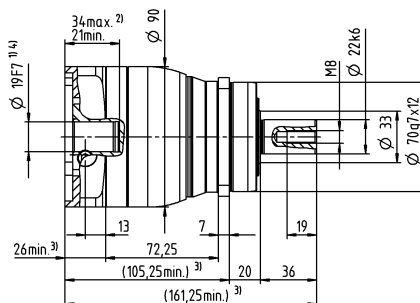



up to 28⁴⁾ (H)
clamping hub
diameter


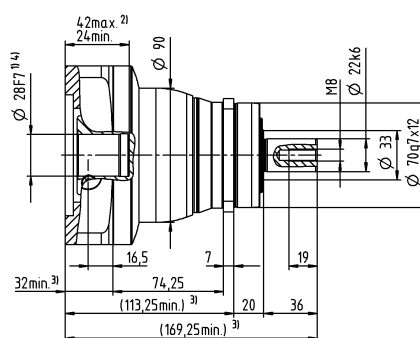



2-stage

up to 14⁴⁾ (C)⁵⁾
clamping hub
diameter

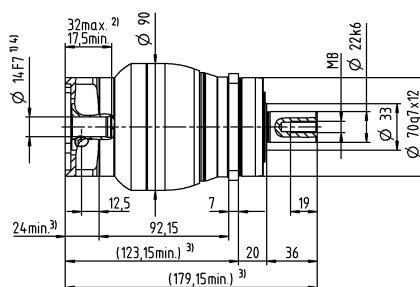

up to 19⁴⁾ (E)
clamping hub
diameter

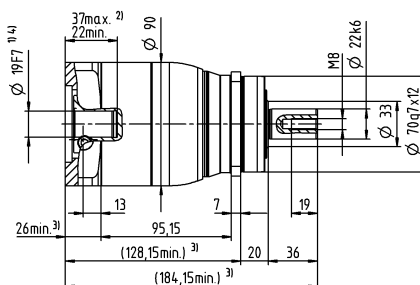



Motor shaft diameter [mm]

Other output variants

Shaft with key

Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated

by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPS 035 MA 1-/2-stage

						1-stage		2-stage						
Ratio		i		3	4	9	12	15	16	20	28	30	40	
Max. torque ^{a) b) e)}		T_{2a}	<i>Nm</i>	480	480	480	480	480	480	480	480	432	480	
			<i>in.lb</i>	4248	4248	4248	4248	4248	4248	4248	4248	4248	3824	4248
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)		T_{2B}	<i>Nm</i>	305	305	305	305	300	305	305	305	270	305	
			<i>in.lb</i>	2699	2699	2699	2699	2655	2699	2699	2699	2699	2390	2699
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)		T_{2Not}	<i>Nm</i>	500	500	500	500	500	500	500	500	500	500	
			<i>in.lb</i>	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)		n_{1N}	<i>rpm</i>	2000	2200	2700	3300	3400	3300	3400	3600	3900	3900	
Max. input speed		n_{1Max}	<i>rpm</i>	6000	6000	7000	7000	7000	7000	7000	7000	7000	7000	
Mean no load running torque ^{b)} (at n_1 =3000 rpm and 20 °C gearbox temperature)		T_{012}	<i>Nm</i>	3.3	2.7	1.7	1.4	1.2	1.2	1.1	0.93	0.88	0.81	
			<i>in.lb</i>	29	24	15	12	11	11	9.7	8.2	7.8	7.2	
Max. backlash		j_t	<i>arcmin</i>	≤ 8		≤ 10								
Torsional rigidity ^{b)}		C_{t21}	<i>Nm/arcmin</i>	30	30	30	30	30	30	30	30	30	30	
			<i>in.lb/arcmin</i>	266	266	266	266	266	266	266	266	266	266	266
Max. axial force ^{c)}		F_{2AMax}	<i>N</i>	5650		5650								
			<i>lb_f</i>	1271		1271								
Max. lateral force ^{c)}		F_{2QMax}	<i>N</i>	6600		6600								
			<i>lb_f</i>	1485		1485								
Max. tilting moment		M_{2KMax}	<i>Nm</i>	487		487								
			<i>in.lb</i>	4310		4310								
Efficiency at full load		η	%	97		95								
Service life		L_h	<i>h</i>	> 20000		> 20000								
Weight (incl. standard adapter plate)		m	<i>kg</i>	8.4		8.8								
			<i>lb_m</i>	19		19								
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)		L_{PA}	<i>dB(A)</i>	≤ 65		≤ 61								
Max. permitted housing temperature			°C	+90		+90								
			°F	+194		+194								
Ambient temperature			°C	−15 to +40		−15 to +40								
			°F	+5 to +104		+5 to +104								
Lubrication				Lubricated for life										
Direction of rotation				In- and output same direction										
Protection class				IP 65										
Elastomer coupling (recommended product type – validate sizing with cymex®)				ELC-0150BA032.000-X										
Bore diameter of coupling on the application side			<i>mm</i>	X = 019.000 - 036.000										
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	C	14	J_1	<i>kgcm²</i>	–	–	0.6	0.59	0.6	0.43	0.42	0.37	0.52	0.36
				<i>10⁻³ in.lb.s²</i>	–	–	0.53	0.52	0.53	0.38	0.37	0.33	0.46	0.32
	D	16	J_1	<i>kgcm²</i>	–	–	0.75	0.74	0.74	0.58	0.57	0.5	0.67	0.51
				<i>10⁻³ in.lb.s²</i>	–	–	0.66	0.65	0.65	0.51	0.5	0.44	0.59	0.45
	E	19	J_1	<i>kgcm²</i>	2.5	1.7	0.84	0.83	0.83	0.66	0.65	0.6	0.75	0.6
				<i>10⁻³ in.lb.s²</i>	2.2	1.5	0.74	0.73	0.73	0.58	0.58	0.53	0.66	0.53
	G	24	J_1	<i>kgcm²</i>	3.3	2.4	1.9	1.9	1.9	1.7	1.7	1.6	1.8	1.6
				<i>10⁻³ in.lb.s²</i>	2.9	2.1	1.7	1.6	1.7	1.5	1.5	1.5	1.6	1.4
	H	28	J_1	<i>kgcm²</i>	3	2.2	1.6	1.6	1.6	1.4	1.4	1.3	1.5	1.3
				<i>10⁻³ in.lb.s²</i>	2.7	1.9	1.4	1.4	1.4	1.2	1.2	1.2	1.3	1.2
	I	32	J_1	<i>kgcm²</i>	7.1	6.2	–	–	–	–	–	–	–	–
				<i>10⁻³ in.lb.s²</i>	6.3	5.5	–	–	–	–	–	–	–	–
K	38	J_1	<i>kgcm²</i>	8.3	7.4	–	–	–	–	–	–	–	–	
			<i>10⁻³ in.lb.s²</i>	7.3	6.5	–	–	–	–	–	–	–	–	

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Valid for: Smooth shaft

1-stage

up to 24/28⁴⁾
(G⁵⁾/H)
clamping hub
diameter


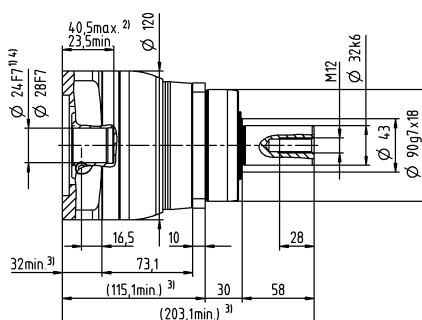



up to 38⁴⁾ (K)
clamping hub
diameter


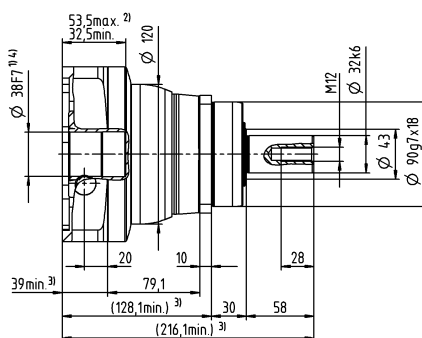



2-stage

up to 19⁴⁾ (E)⁵⁾
clamping hub
diameter

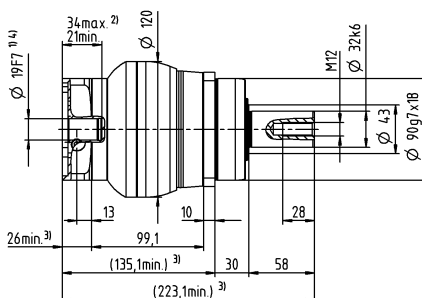


up to 28⁴⁾ (H)
clamping hub
diameter

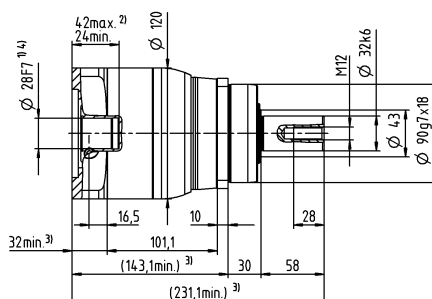


Motor shaft diameter [mm]

Other output variants

Shaft with key



Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated

by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPT 005 MF 1-stage

				1-stage					
Ratio		i		4	5	7	8	10	
Max. torque ^{a) b)}		T_{2a}	Nm	18	22	22	21	21	
			in.lb	159	195	195	186	186	
Max. acceleration torque (max. 1000 cycles per hour)		T_{2B}	Nm	11	14	14	13	13	
			in.lb	97	124	124	115	115	
Emergency stop torque ^{a) b)} (permitted 1000 times during the service life of the gearbox)		T_{2Not}	Nm	26	26	26	26	26	
			in.lb	230	230	230	230	230	
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)		n_{1N}	rpm	3800	4000	4300	4400	4600	
Max. input speed		n_{1Max}	rpm	10000	10000	10000	10000	10000	
Mean no load running torque ^{b)} (at n_1 =3000 rpm and 20 °C gearbox temperature)		T_{012}	Nm	0.08	0.07	0.05	0.05	0.05	
			in.lb	0.71	0.62	0.44	0.44	0.44	
Max. backlash		j_i	arcmin	≤ 10					
Torsional rigidity ^{b)}		C_{t21}	Nm/arcmin	1.2	1.2	1.2	0.85	0.85	
			in.lb/arcmin	11	11	11	7.5	7.5	
Max. axial force ^{c)}		F_{2AMax}	N	600					
			lb _f	135					
Max. tilting moment		M_{2KMax}	Nm	17					
			in.lb	150					
Efficiency at full load		η	%	97					
Service life		L_h	h	> 20000					
Weight (incl. standard adapter plate)		m	kg	0.9					
			lb _m	2					
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)		L_{PA}	dB(A)	≤ 58					
Max. permitted housing temperature			°C	+90					
			°F	+194					
Ambient temperature			°C	–15 to +40					
			°F	+5 to +104					
Lubrication				Lubricated for life					
Direction of rotation				In- and output same direction					
Protection class				IP 64					
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	Z	8	J_1	kgcm ²	0.04	0.03	0.03	0.03	0.02
				10 ⁻³ in.lb.s ²	0.04	0.03	0.03	0.03	0.02
	A	9	J_1	kgcm ²	0.04	0.03	0.03	0.03	0.02
				10 ⁻³ in.lb.s ²	0.04	0.03	0.03	0.03	0.02
	B	11	J_1	kgcm ²	0.06	0.05	0.05	0.04	0.04
				10 ⁻³ in.lb.s ²	0.05	0.04	0.04	0.04	0.04
	C	14	J_1	kgcm ²	0.14	0.14	0.13	0.13	0.13
				10 ⁻³ in.lb.s ²	0.12	0.12	0.12	0.12	0.12

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




1-stage

Motor shaft diameter [mm]

up to 11⁴⁾ (B)⁵⁾
clamping hub
diameter

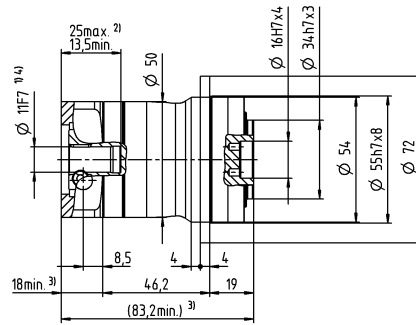

up to 14⁴⁾ (C)
clamping hub
diameter

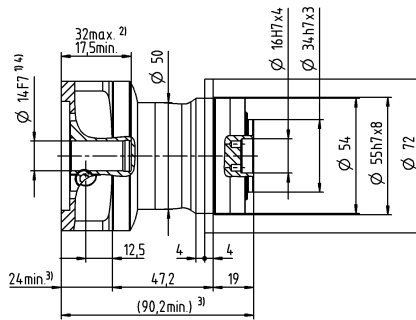

Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPT 005 MF 2-stage

				2-stage										
Ratio		i			16	20	25	28	35	40	50	64	70	100
Max. torque ^{a) b)}		T_{2a}	Nm	18	18	22	18	22	18	22	21	22	21	
			$in.lb$	159	159	195	159	195	159	195	186	195	186	
Max. acceleration torque (max. 1000 cycles per hour)		T_{2B}	Nm	11	11	14	11	14	11	14	13	14	13	
			$in.lb$	97	97	124	97	124	97	124	115	124	115	
Emergency stop torque ^{a) b)} (permitted 1000 times during the service life of the gearbox)		T_{2Not}	Nm	26	26	26	26	26	26	26	26	26	26	
			$in.lb$	230	230	230	230	230	230	230	230	230	230	
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)		n_{1N}	rpm	4000	4000	4000	4300	4300	4600	4600	4400	4600		
Max. input speed		n_{1Max}	rpm	10000	10000	10000	10000	10000	10000	10000	10000	10000		
Mean no load running torque ^{b)} (at n_1 =3000 rpm and 20 °C gearbox temperature)		T_{012}	Nm	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	
			$in.lb$	0.35	0.35	0.27	0.27	0.27	0.27	0.27	0.27	0.27	0.27	
Max. backlash		j_t	$arcmin$	≤ 13										
Torsional rigidity ^{b)}		C_{t21}	$Nm/arcmin$	1.2	1.2	1.2	1.2	1.2	1.2	1.2	0.85	1.2	0.85	
			$in.lb/arcmin$	11	11	11	11	11	11	11	7.5	11	7.5	
Max. axial force ^{c)}		F_{2AMax}	N	600										
			lb_f	135										
Max. tilting moment		M_{2KMax}	Nm	17										
			$in.lb$	150										
Efficiency at full load		η	%	95										
Service life		L_h	h	> 20000										
Weight (incl. standard adapter plate)		m	kg	1.1										
			lb_m	2.4										
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)		L_{PA}	$dB(A)$	≤ 58										
Max. permitted housing temperature			°C	+90										
			°F	+194										
Ambient temperature			°C	–15 to +40										
			°F	+5 to +104										
Lubrication				Lubricated for life										
Direction of rotation				In- and output same direction										
Protection class				IP 64										
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	Z	8	J_1	$kgcm^2$	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.03
				$10^{-3} in.lb.s^2$	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.03
	A	9	J_1	$kgcm^2$	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.03
				$10^{-3} in.lb.s^2$	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.03
	B	11	J_1	$kgcm^2$	0.05	0.05	0.04	0.05	0.04	0.04	0.04	0.04	0.05	
				$10^{-3} in.lb.s^2$	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04
	C	14	J_1	$kgcm^2$	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13
				$10^{-3} in.lb.s^2$	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only




^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange




^{d)} Please reduce input speed at higher ambient temperatures

2-stage

up to 11⁴⁾ (B)⁵⁾
clamping hub
diameter

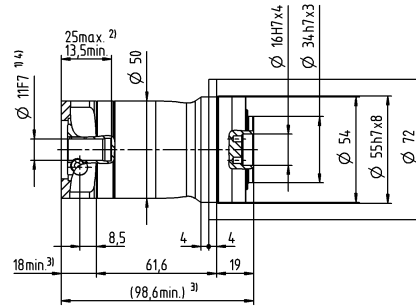

up to 14⁴⁾ (C)
clamping hub
diameter

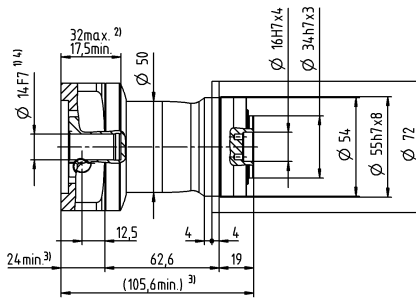

Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPT 015 MF 1-stage

				1-stage						
Ratio		i		3	4	5	7	8	10	
Max. torque ^{a) b)}		T_{2a}	Nm	51	56	60	60	56	56	
			in.lb	451	496	531	531	496	496	
Max. acceleration torque (max. 1000 cycles per hour)		T_{2B}	Nm	32	35	40	40	35	35	
			in.lb	283	310	354	354	310	310	
Emergency stop torque ^{a) b)} (permitted 1000 times during the service life of the gearbox)		T_{2Not}	Nm	75	75	75	75	75	75	
			in.lb	664	664	664	664	664	664	
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)		n_{1N}	rpm	3300	3500	3700	4000	4100	4300	
Max. input speed		n_{1Max}	rpm	8000	8000	8000	8000	8000	8000	
Mean no load running torque ^{b)} (at n_1 = 3000 rpm and 20 °C gearbox temperature)		T_{012}	Nm	0.25	0.2	0.17	0.14	0.13	0.11	
			in.lb	2.2	1.8	1.5	1.2	1.2	0.97	
Max. backlash		j_t	arcmin	≤ 8						
Torsional rigidity ^{b)}		C_{t21}	Nm/arcmin	3.3	3.3	3.3	3.3	2.8	2.8	
			in.lb/arcmin	29	29	29	29	25	25	
Max. axial force ^{c)}		F_{2AMax}	N	1380						
			lb _f	311						
Max. tilting moment		M_{2KMax}	Nm	42						
			in.lb	372						
Efficiency at full load		η	%	97						
Service life		L_h	h	> 20000						
Weight (incl. standard adapter plate)		m	kg	2						
			lb _m	4.4						
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)		L_{PA}	dB(A)	≤ 59						
Max. permitted housing temperature			°C	+90						
			°F	+194						
Ambient temperature			°C	–15 to +40						
			°F	+5 to +104						
Lubrication				Lubricated for life						
Direction of rotation				In- and output same direction						
Protection class				IP 64						
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	A	9	J_1	kgcm ²	0.31	0.23	0.19	0.16	0.15	0.14
				10 ⁻³ in.lb.s ²	0.27	0.2	0.17	0.14	0.13	0.12
	B	11	J_1	kgcm ²	0.33	0.24	0.21	0.17	0.17	0.16
				10 ⁻³ in.lb.s ²	0.29	0.21	0.19	0.15	0.15	0.14
	C	14	J_1	kgcm ²	0.41	0.32	0.28	0.25	0.24	0.23
				10 ⁻³ in.lb.s ²	0.36	0.28	0.25	0.22	0.21	0.2
	D	16	J_1	kgcm ²	0.53	0.45	0.41	0.38	0.37	0.36
				10 ⁻³ in.lb.s ²	0.47	0.4	0.36	0.34	0.33	0.32
E	19	J_1	kgcm ²	0.62	0.53	0.49	0.46	0.45	0.44	
			10 ⁻³ in.lb.s ²	0.55	0.47	0.43	0.41	0.4	0.39	

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




1-stage

Motor shaft diameter [mm]

up to 14⁴⁾ (C)⁵⁾
clamping hub
diameter

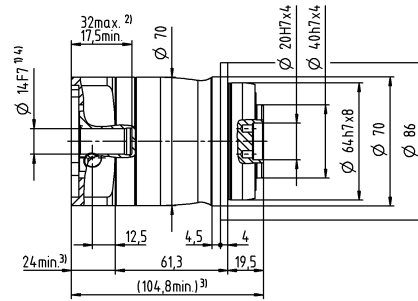

up to 19⁴⁾ (E)
clamping hub
diameter

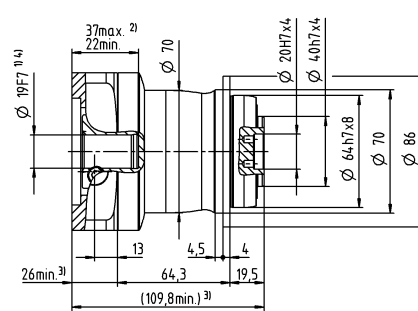

Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPT 015 MF 2-stage

				2-stage													
Ratio	i			12	15	16	20	25	28	30	32	35	40	50	64	70	100
Max. torque ^{a) b)}	T_{2a}	Nm		51	51	56	56	60	56	51	56	60	56	60	56	60	56
		in.lb		451	451	496	496	531	496	451	496	531	496	531	496	531	496
Max. acceleration torque (max. 1000 cycles per hour)	T_{2B}	Nm		32	32	35	35	40	35	32	35	40	35	40	35	40	35
		in.lb		283	283	310	310	354	310	283	310	354	310	354	310	354	310
Emergency stop torque ^{a) b)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm		75	75	75	75	75	75	75	75	75	75	75	75	75	75
		in.lb		664	664	664	664	664	664	664	664	664	664	664	664	664	664
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}	rpm		3800	4000	3800	4000	4000	4300	4600	4400	4300	4600	4600	4400	4600	4600
Max. input speed	n_{1Max}	rpm		10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000
Mean no load running torque ^{b)} (at $n_1=3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm		0.08	0.07	0.06	0.06	0.05	0.05	0.05	0.04	0.04	0.04	0.04	0.03	0.03	0.03
		in.lb		0.71	0.62	0.53	0.53	0.44	0.44	0.44	0.35	0.35	0.35	0.35	0.27	0.27	0.27
Max. backlash	j_t	arcmin		≤ 10													
Torsional rigidity ^{b)}	C_{t21}	Nm/arcmin		3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	2.8	3.3	2.8
		in.lb/arcmin		29	29	29	29	29	29	29	29	29	29	29	25	29	25
Max. axial force ^{c)}	F_{2AMax}	N		1380													
		lb _f		311													
Max. tilting moment	M_{2KMax}	Nm		42													
		in.lb		372													
Efficiency at full load	η	%		95													
Service life	L_h	h		> 20000													
Weight (incl. standard adapter plate)	m	kg		2.1													
		lb _m		4.6													
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)		≤ 58													
Max. permitted housing temperature		°C		+90													
		°F		+194													
Ambient temperature		°C		-15 to +40													
		°F		+5 to +104													
Lubrication				Lubricated for life													
Direction of rotation				In- and output same direction													
Protection class				IP 64													
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	Z	8	J_1	kgcm ²	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02
				10 ⁻³ in.lb.s ²	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02
	A	9	J_1	kgcm ²	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02
				10 ⁻³ in.lb.s ²	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02
	B	11	J_1	kgcm ²	0.06	0.06	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.04	0.04	0.04
				10 ⁻³ in.lb.s ²	0.05	0.05	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04
	C	14	J_1	kgcm ²	0.15	0.14	0.14	0.14	0.13	0.13	0.14	0.13	0.13	0.13	0.13	0.13	0.13
				10 ⁻³ in.lb.s ²	0.13	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only




^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange




^{d)} Please reduce input speed at higher ambient temperatures

2-stage

up to 11⁴⁾ (B)⁵⁾
clamping hub
diameter

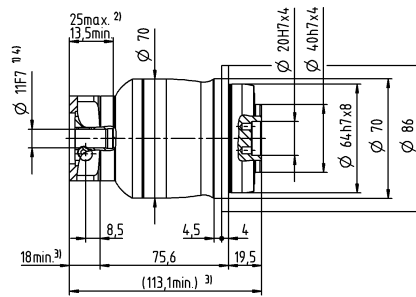

up to 14⁴⁾ (C)
clamping hub
diameter

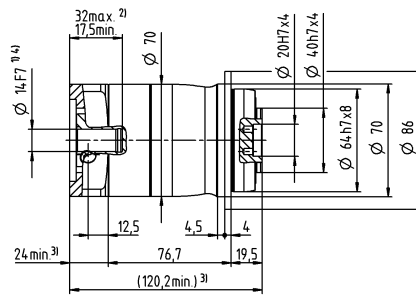

Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPT 025 MF 1-stage

				1-stage						
Ratio		i		3	4	5	7	8	10	
Max. torque ^{a) b)}		T_{2a}	Nm	128	152	160	160	144	144	
			in.lb	1133	1345	1416	1416	1275	1275	
Max. acceleration torque (max. 1000 cycles per hour)		T_{2B}	Nm	80	95	100	100	90	90	
			in.lb	708	841	885	885	797	797	
Emergency stop torque ^{a) b)} (permitted 1000 times during the service life of the gearbox)		T_{2Not}	Nm	190	190	190	190	190	190	
			in.lb	1682	1682	1682	1682	1682	1682	
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)		n_{1N}	rpm	3100	3300	3400	3600	3700	3900	
Max. input speed		n_{1Max}	rpm	7000	7000	7000	7000	7000	7000	
Mean no load running torque ^{b)} (at n_1 = 3000 rpm and 20 °C gearbox temperature)		T_{012}	Nm	0.43	0.35	0.3	0.24	0.23	0.2	
			in.lb	3.8	3.1	2.7	2.1	2	1.8	
Max. backlash		j_t	arcmin	≤ 8						
Torsional rigidity ^{b)}		C_{21}	Nm/arcmin	9.5	9.5	9.5	9.5	8.5	8.5	
			in.lb/arcmin	84	84	84	84	75	75	
Max. axial force ^{c)}		F_{2AMax}	N	1900						
			lb _f	428						
Max. tilting moment		M_{2KMax}	Nm	79						
			in.lb	699						
Efficiency at full load		η	%	97						
Service life		L_h	h	> 20000						
Weight (incl. standard adapter plate)		m	kg	4.4						
			lb _m	9.7						
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)		L_{PA}	dB(A)	≤ 61						
Max. permitted housing temperature			°C	+90						
			°F	+194						
Ambient temperature			°C	–15 to +40						
			°F	+5 to +104						
Lubrication				Lubricated for life						
Direction of rotation				In- and output same direction						
Protection class				IP 64						
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	C	14	J_1	kgcm ²	0.75	0.57	0.44	0.33	0.3	0.27
				10 ⁻³ in.lb.s ²	0.66	0.5	0.39	0.29	0.27	0.24
	D	16	J_1	kgcm ²	0.9	0.72	0.59	0.46	0.45	0.42
				10 ⁻³ in.lb.s ²	0.8	0.64	0.52	0.41	0.4	0.37
	E	19	J_1	kgcm ²	0.99	0.8	0.67	0.56	0.53	0.5
				10 ⁻³ in.lb.s ²	0.88	0.71	0.59	0.5	0.47	0.44
	G	24	J_1	kgcm ²	2	1.8	1.7	1.6	1.6	1.5
				10 ⁻³ in.lb.s ²	1.8	1.6	1.5	1.4	1.4	1.3
H	28	J_1	kgcm ²	1.7	1.5	1.4	1.3	1.3	1.2	
			10 ⁻³ in.lb.s ²	1.5	1.3	1.2	1.2	1.2	1.1	

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter







^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures

1-stage

Motor shaft diameter [mm]

up to 19⁴⁾ (E)⁵⁾
clamping hub
diameter

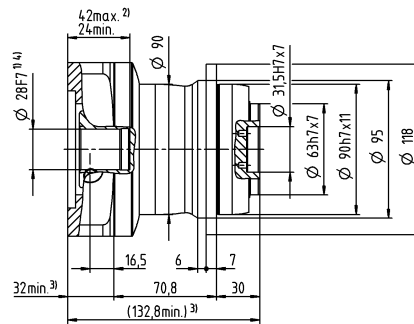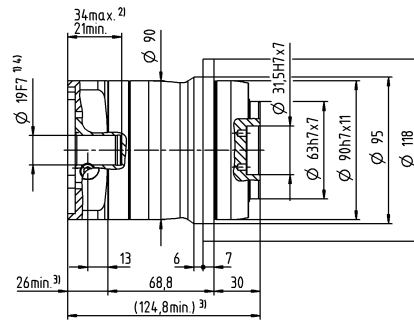

Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPT 025 MF 2-stage

				2-stage															
Ratio	i			9	12	15	16	20	25	28	30	32	35	40	50	64	70	100	
Max. torque ^{a) b)}	T_{2a}		Nm	128	128	128	152	152	160	152	128	152	160	152	160	144	160	144	
			in.lb	1133	1133	1133	1345	1345	1416	1345	1133	1345	1416	1345	1416	1275	1416	1275	
Max. acceleration torque (max. 1000 cycles per hour)	T_{2B}		Nm	80	80	80	95	95	100	95	80	95	100	95	100	90	100	90	
			in.lb	708	708	708	841	841	885	841	708	841	885	841	885	797	885	797	
Emergency stop torque ^{a) b)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}		Nm	190	190	190	190	190	190	190	190	190	190	190	190	190	190	190	
			in.lb	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}		rpm	3300	3500	3700	3500	3700	3700	4000	4300	4100	4000	4300	4300	4100	4300	4300	
Max. input speed	n_{1Max}		rpm	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	
Mean no load running torque ^{b)} (at n_1 =3000 rpm and 20 °C gearbox temperature)	T_{012}		Nm	0.16	0.13	0.12	0.11	0.1	0.09	0.09	0.08	0.08	0.08	0.08	0.07	0.07	0.06	0.06	
			in.lb	1.4	1.2	1.1	0.97	0.89	0.8	0.8	0.71	0.71	0.71	0.71	0.62	0.62	0.53	0.53	
Max. backlash	j_t		arcmin	≤ 10															
Torsional rigidity ^{b)}	C_{21}		Nm/arcmin	10	10	10	10	10	9.5	10	10	10	9.5	10	9.5	8.5	9.5	8.5	
			in.lb/arcmin	89	89	89	89	89	84	89	89	89	84	89	84	75	84	75	
Max. axial force ^{c)}	F_{2AMax}		N	1900															
			lb _f	428															
Max. tilting moment	M_{2KMax}		Nm	79															
			in.lb	699															
Efficiency at full load	η		%	95															
Service life	L_h		h	> 20000															
Weight (incl. standard adapter plate)	m		kg	4.7															
			lb _m	10															
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}		dB(A)	≤ 59															
Max. permitted housing temperature			°C	+90															
			°F	+194															
Ambient temperature			°C	–15 to +40															
			°F	+5 to +104															
Lubrication				Lubricated for life															
Direction of rotation				In- and output same direction															
Protection class				IP 64															
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	A	9	J_1	kgcm ²	0.28	0.23	0.22	0.22	0.21	0.2	0.2	0.19	0.19	0.19	0.19	0.19	0.19	0.19	
				10 ⁻³ in.lb.s ²	0.25	0.2	0.19	0.19	0.19	0.18	0.18	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.17
	B	11	J_1	kgcm ²	0.3	0.25	0.23	0.24	0.23	0.22	0.21	0.21	0.21	0.21	0.21	0.21	0.21	0.21	
				10 ⁻³ in.lb.s ²	0.27	0.22	0.2	0.21	0.2	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.19	
	C	14	J_1	kgcm ²	0.37	0.32	0.31	0.31	0.3	0.29	0.29	0.29	0.29	0.29	0.28	0.28	0.28	0.28	
				10 ⁻³ in.lb.s ²	0.33	0.28	0.27	0.27	0.27	0.26	0.26	0.26	0.26	0.26	0.25	0.25	0.25	0.25	0.25
	D	16	J_1	kgcm ²	0.5	0.45	0.44	0.44	0.43	0.42	0.42	0.41	0.41	0.41	0.41	0.41	0.41	0.41	0.41
				10 ⁻³ in.lb.s ²	0.44	0.4	0.39	0.39	0.38	0.37	0.37	0.36	0.36	0.36	0.36	0.36	0.36	0.36	0.36
	E	19	J_1	kgcm ²	0.58	0.53	0.52	0.52	0.51	0.51	0.5	0.5	0.5	0.5	0.49	0.49	0.49	0.49	0.49
				10 ⁻³ in.lb.s ²	0.51	0.47	0.46	0.46	0.45	0.45	0.44	0.44	0.44	0.44	0.43	0.43	0.43	0.43	0.43

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only




^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange




^{d)} Please reduce input speed at higher ambient temperatures

2-stage

up to 14⁴⁾ (C)⁵⁾
clamping hub
diameter

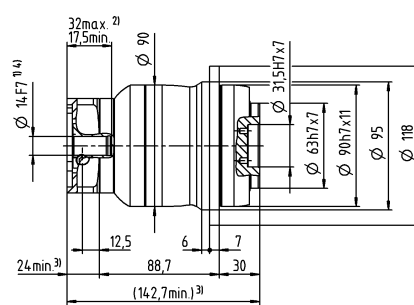

up to 19⁴⁾ (E)
clamping hub
diameter

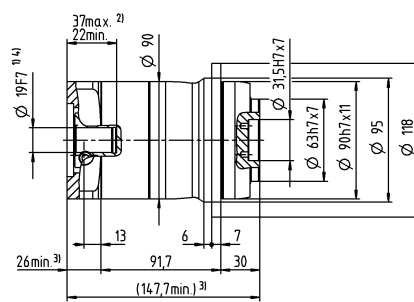

Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPT 035 MF 1-stage

				1-stage						
Ratio	i			3	4	5	7	8	10	
Max. torque ^{a) b)}	T_{2a}		Nm	320	365	365	365	352	352	
			in.lb	2832	3231	3231	3231	3115	3115	
Max. acceleration torque (max. 1000 cycles per hour)	T_{2B}		Nm	200	255	250	250	220	220	
			in.lb	1770	2257	2213	2213	1947	1947	
Emergency stop torque ^{a) b)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}		Nm	480	480	480	480	480	480	
			in.lb	4248	4248	4248	4248	4248	4248	
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}		rpm	2300	2500	2600	2800	2900	3000	
Max. input speed	n_{1Max}		rpm	6000	6000	6000	6000	6000	6000	
Mean no load running torque ^{b)} (at n_1 =3000 rpm and 20 °C gearbox temperature)	T_{012}		Nm	1.7	1.3	1.1	0.79	0.71	0.6	
			in.lb	15	12	9.7	7	6.3	5.3	
Max. backlash	j_t		arcmin	≤ 8						
Torsional rigidity ^{b)}	C_{t21}		Nm/arcmin	25	25	25	25	22	22	
			in.lb/arcmin	221	221	221	221	195	195	
Max. axial force ^{c)}	F_{2AMax}		N	3500						
			lb _f	788						
Max. tilting moment	M_{2KMax}		Nm	134						
			in.lb	1186						
Efficiency at full load	η		%	97						
Service life	L_h		h	> 20000						
Weight (incl. standard adapter plate)	m		kg	9.4						
			lb _m	21						
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}		dB(A)	≤ 65						
Max. permitted housing temperature			°C	+90						
			°F	+194						
Ambient temperature			°C	-15 to +40						
			°F	+5 to +104						
Lubrication				Lubricated for life						
Direction of rotation				In- and output same direction						
Protection class				IP 64						
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	E	19	J_1	kgcm ²	3.2	2	1.6	1.2	1	0.93
				10 ⁻³ in.lb.s ²	2.8	1.8	1.4	1.1	0.89	0.82
	G	24	J_1	kgcm ²	4	2.8	2.4	1.9	1.8	1.7
				10 ⁻³ in.lb.s ²	3.5	2.5	2.1	1.7	1.6	1.5
	H	28	J_1	kgcm ²	3.7	2.5	2.1	1.6	1.5	1.4
				10 ⁻³ in.lb.s ²	3.3	2.2	1.9	1.4	1.3	1.2
	I	32	J_1	kgcm ²	7.7	6.6	6.1	5.7	5.6	5.5
				10 ⁻³ in.lb.s ²	6.8	5.8	5.4	5	5	4.9
	K	38	J_1	kgcm ²	8.9	7.8	7.3	6.9	6.7	6.6
				10 ⁻³ in.lb.s ²	7.9	6.9	6.5	6.1	5.9	5.8

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only




^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange




^{d)} Please reduce input speed at higher ambient temperatures

1-stage

up to 24/28⁴⁾
(G⁵⁾/H)
clamping hub
diameter

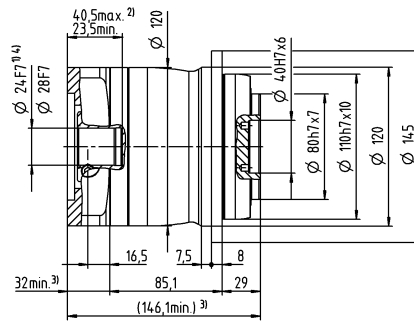

up to 38⁴⁾ (K)
clamping hub
diameter

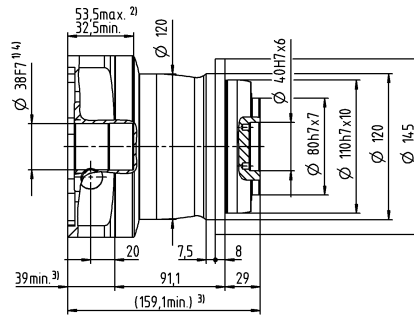

Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPT 035 MF 2-stage

				2-stage															
Ratio	i			9	12	15	16	20	25	28	30	32	35	40	50	64	70	100	
Max. torque ^{a) b)}	T_{2a}		Nm	320	320	320	365	365	365	365	320	365	365	365	365	352	365	352	
			in.lb	2832	2832	2832	3231	3231	3231	3231	2832	3231	3231	3231	3231	3115	3231	3115	
Max. acceleration torque (max. 1000 cycles per hour)	T_{2B}		Nm	200	200	200	255	255	250	255	200	255	250	255	250	220	250	220	
			in.lb	1770	1770	1770	2257	2257	2213	2257	1770	2257	2213	2257	2213	1947	2213	1947	
Emergency stop torque ^{a) b)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}		Nm	480	480	480	480	480	480	480	480	480	480	480	480	480	480	480	
			in.lb	4248	4248	4248	4248	4248	4248	4248	4248	4248	4248	4248	4248	4248	4248	4248	
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}		rpm	3100	3300	3400	3300	3400	3400	3600	3900	3700	3600	3900	3900	3700	3900	3900	
Max. input speed	n_{1Max}		rpm	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	
Mean no load running torque ^{b)} (at n_1 =3000 rpm and 20 °C gearbox temperature)	T_{012}		Nm	0.6	0.48	0.4	0.38	0.33	0.28	0.26	0.25	0.24	0.23	0.21	0.19	0.17	0.16	0.15	
			in.lb	5.3	4.2	3.5	3.4	2.9	2.5	2.3	2.2	2.1	2	1.9	1.7	1.5	1.4	1.3	
Max. backlash	j_t		arcmin	≤ 10															
Torsional rigidity ^{b)}	C_{t21}		Nm/arcmin	25	25	25	25	25	25	25	25	25	25	25	25	22	25	22	
			in.lb/arcmin	221	221	221	221	221	221	221	221	221	221	221	221	195	221	195	
Max. axial force ^{c)}	F_{2AMax}		N	3500															
			lb _f	788															
Max. tilting moment	M_{2KMax}		Nm	134															
			in.lb	1186															
Efficiency at full load	η		%	95															
Service life	L_h		h	> 20000															
Weight (incl. standard adapter plate)	m		kg	9.8															
			lb _m	22															
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}		dB(A)	≤ 61															
Max. permitted housing temperature			°C	+90															
			°F	+194															
Ambient temperature			°C	−15 to +40															
			°F	+5 to +104															
Lubrication				Lubricated for life															
Direction of rotation				In- and output same direction															
Protection class				IP 64															
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	C	14	J_1	kgcm ²	0.68	0.63	0.62	0.45	0.44	0.37	0.38	0.52	0.38	0.32	0.37	0.31	0.26	0.27	0.24
				10 ⁻³ in.lb.s ²	0.6	0.56	0.55	0.4	0.39	0.33	0.34	0.46	0.34	0.28	0.33	0.27	0.23	0.24	0.21
	D	16	J_1	kgcm ²	0.82	0.78	0.77	0.6	0.58	0.51	0.51	0.67	0.53	0.45	0.52	0.46	0.4	0.41	0.39
				10 ⁻³ in.lb.s ²	0.73	0.69	0.68	0.53	0.51	0.45	0.45	0.59	0.47	0.4	0.46	0.41	0.35	0.36	0.35
	E	19	J_1	kgcm ²	0.91	0.87	0.86	0.69	0.67	0.6	0.61	0.76	0.61	0.55	0.6	0.55	0.49	0.5	0.48
				10 ⁻³ in.lb.s ²	0.81	0.77	0.76	0.61	0.59	0.53	0.54	0.67	0.54	0.49	0.53	0.49	0.43	0.44	0.42
	G	24	J_1	kgcm ²	1.9	1.9	1.9	1.7	1.7	1.6	1.6	1.8	1.7	1.6	1.6	1.6	1.5	1.5	1.5
				10 ⁻³ in.lb.s ²	1.7	1.7	1.7	1.5	1.5	1.4	1.4	1.6	1.5	1.4	1.4	1.4	1.3	1.3	1.3
	H	28	J_1	kgcm ²	1.7	1.6	1.6	1.4	1.4	1.3	1.4	1.5	1.4	1.3	1.3	1.3	1.2	1.2	1.2
				10 ⁻³ in.lb.s ²	1.5	1.4	1.4	1.2	1.2	1.2	1.2	1.3	1.2	1.2	1.2	1.2	1.1	1.1	1.1

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only




^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange




^{d)} Please reduce input speed at higher ambient temperatures

2-stage

up to 19⁴⁾ (E)⁵⁾
clamping hub
diameter

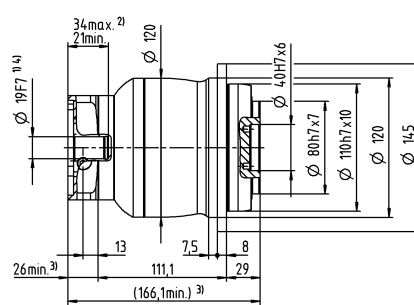

up to 28⁴⁾ (H)
clamping hub
diameter

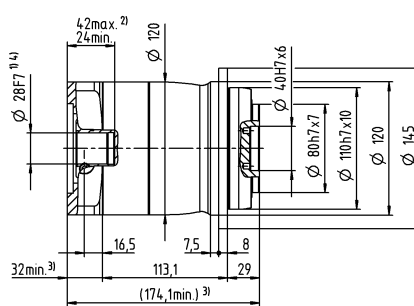

Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPT 045 MF 1-/2-stage

				1-stage			2-stage					
Ratio	i			5	8	10	25	32	50	64	100	
Max. torque ^{a) b)}	T_{2a}		Nm	700	640	640	700	640	700	640	640	
			in.lb	6196	5665	5665	6196	5665	6196	5665	5665	
Max. acceleration torque (max. 1000 cycles per hour)	T_{2B}		Nm	500	400	400	500	400	500	400	400	
			in.lb	4425	3540	3540	4425	3540	4425	3540	3540	
Emergency stop torque ^{a) b)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}		Nm	1000	1000	1000	1000	1000	1000	1000	1000	
			in.lb	8851	8851	8851	8851	8851	8851	8851	8851	
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}		rpm	2000	2200	2300	2600	2500	3000	2900	3000	
Max. input speed	n_{1Max}		rpm	4000	4000	4000	6000	6000	6000	6000	6000	
Mean no load running torque ^{b)} (at n_1 = 3000 rpm and 20 °C gearbox temperature)	T_{012}		Nm	1.5	1.1	0.9	0.39	0.34	0.27	0.24	0.21	
			in.lb	13	9.7	8	3.5	3	2.4	2.1	1.9	
Max. backlash	j_t		arcmin	≤ 8			≤ 10					
Torsional rigidity ^{b)}	C_{t21}		Nm/arcmin	55	44	44	55	44	55	44	44	
			in.lb/arcmin	487	389	389	487	389	487	389	389	
Max. axial force ^{c)}	F_{2AMax}		N	3800			3800					
			lb _f	855			855					
Max. tilting moment	M_{2KMax}		Nm	256			256					
			in.lb	2266			2266					
Efficiency at full load	η		%	97			95					
Service life	L_h		h	> 20000			> 20000					
Weight (incl. standard adapter plate)	m		kg	19			20					
			lb _m	42			44					
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}		dB(A)	≤ 68			≤ 65					
Max. permitted housing temperature			°C	+90			+90					
			°F	+194			+194					
Ambient temperature			°C	–15 to +40			–15 to +40					
			°F	+5 to +104			+5 to +104					
Lubrication				Lubricated for life								
Direction of rotation				In- and output same direction								
Protection class				IP 64								
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	E	19	J_1	kgcm ²	–	–	–	1.3	1.1	1.1	0.88	0.83
				10 ⁻³ in.lb.s ²	–	–	–	1.2	0.97	0.97	0.78	0.73
	G	24	J_1	kgcm ²	–	–	–	2	1.9	1.8	1.7	1.6
				10 ⁻³ in.lb.s ²	–	–	–	1.8	1.7	1.6	1.5	1.4
	H	28	J_1	kgcm ²	–	–	–	1.8	1.6	1.6	1.4	1.3
				10 ⁻³ in.lb.s ²	–	–	–	1.6	1.4	1.4	1.2	1.2
	I	32	J_1	kgcm ²	–	–	–	5.8	5.7	5.6	5.4	5.4
				10 ⁻³ in.lb.s ²	–	–	–	5.1	5	5	4.8	4.8
K	38	J_1	kgcm ²	9.8	7.8	7.4	7	6.9	6.8	6.6	6.5	
			10 ⁻³ in.lb.s ²	8.7	6.9	6.5	6.2	6.1	6	5.8	5.8	

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only




^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




1-stage

up to 38⁴⁾ (K)⁵⁾
clamping hub
diameter

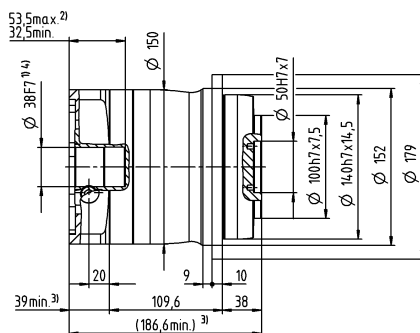




2-stage

up to 28⁴⁾ (H)⁵⁾
clamping hub
diameter

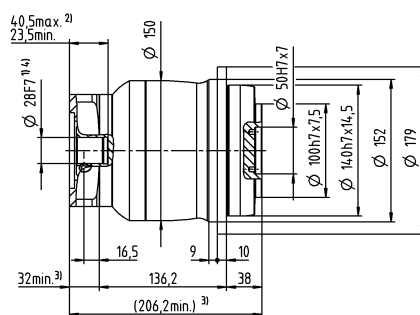

Motor shaft diameter [mm]

up to 38⁴⁾ (K)
clamping hub
diameter

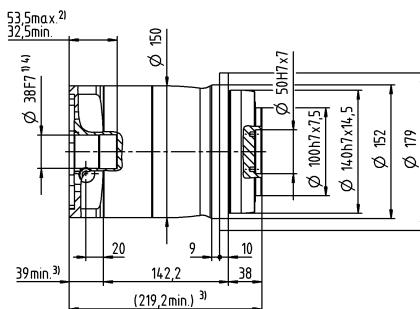

Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPT 015 MA 1-/2-stage

				1-stage			2-stage										
Ratio				i		3	4	12	15	16	20	28	30	40			
Max. torque ^{a) b)}				T_{2a}	Nm	62	62	62	62	62	62	62	62	62			
					in.lb	549	549	549	549	549	549	549	549	549	549		
Max. acceleration torque (max. 1000 cycles per hour)				T_{2B}	Nm	55	42	39	42	42	42	42	39	42			
					in.lb	487	372	345	372	372	372	372	372	345	372		
Emergency stop torque ^{a) b)} (permitted 1000 times during the service life of the gearbox)				T_{2Not}	Nm	75	75	75	75	75	75	75	75	75			
					in.lb	664	664	664	664	664	664	664	664	664	664		
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)				n_{1N}	rpm	3300	3500	3800	4000	3800	4000	4300	4600	4600			
Max. input speed				n_{1Max}	rpm	8000	8000	10000	10000	10000	10000	10000	10000	10000			
Mean no load running torque ^{b)} (at n_1 = 3000 rpm and 20 °C gearbox temperature)				T_{012}	Nm	0.25	0.2	0.08	0.07	0.06	0.06	0.05	0.05	0.04			
					in.lb	2.2	1.8	0.71	0.62	0.53	0.53	0.44	0.44	0.35			
Max. backlash				j_t	arcmin	≤ 8		≤ 10									
Torsional rigidity ^{b)}				C_{t21}	Nm/arcmin	4	4	4	4	4	4	4	4	4			
					in.lb/arcmin	35	35	35	35	35	35	35	35	35	35		
Max. axial force ^{c)}				F_{2AMax}	N	1380		1380									
					lb _f	311		311									
Max. tilting moment				M_{2KMax}	Nm	42		42									
					in.lb	372		372									
Efficiency at full load				η	%	97		95									
Service life				L_h	h	> 20000		> 20000									
Weight (incl. standard adapter plate)				m	kg	2		2.1									
					lb _m	4.4		4.6									
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)				L_{PA}	dB(A)	≤ 59		≤ 58									
Max. permitted housing temperature					°C	+90		+90									
					°F	+194		+194									
Ambient temperature					°C	−15 to +40		−15 to +40									
					°F	+5 to +104		+5 to +104									
Lubrication						Lubricated for life											
Direction of rotation						In- and output same direction											
Protection class						IP 64											
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]				Z	8	J_1	kgcm ²	–	–	0.04	0.04	0.03	0.03	0.03	0.03	0.03	
							10 ⁻³ in.lb.s ²	–	–	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.03
				A	9	J_1	kgcm ²	0.31	0.23	0.04	0.04	0.03	0.03	0.03	0.03	0.03	
							10 ⁻³ in.lb.s ²	0.27	0.2	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.03
				B	11	J_1	kgcm ²	0.33	0.24	0.06	0.06	0.05	0.05	0.05	0.05	0.05	
							10 ⁻³ in.lb.s ²	0.29	0.21	0.05	0.05	0.04	0.04	0.04	0.04	0.04	0.04
				C	14	J_1	kgcm ²	0.41	0.32	0.15	0.14	0.14	0.14	0.13	0.14	0.13	
							10 ⁻³ in.lb.s ²	0.36	0.28	0.13	0.12	0.12	0.12	0.12	0.12	0.12	0.12
				D	16	J_1	kgcm ²	0.53	0.45	–	–	–	–	–	–	–	–
							10 ⁻³ in.lb.s ²	0.47	0.4	–	–	–	–	–	–	–	–
E	19	J_1	kgcm ²	0.62	0.53	–	–	–	–	–	–	–	–				
			10 ⁻³ in.lb.s ²	0.55	0.47	–	–	–	–	–	–	–	–				

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only




^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange




^{d)} Please reduce input speed at higher ambient temperatures

1-stage

up to 14⁴⁾ (C)⁵⁾
clamping hub
diameter


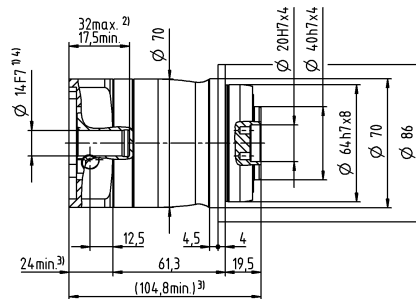



up to 19⁴⁾ (E)
clamping hub
diameter


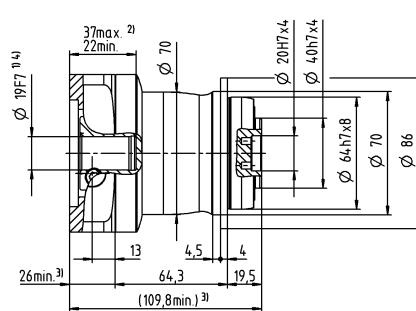



2-stage

up to 11⁴⁾ (B)⁵⁾
clamping hub
diameter

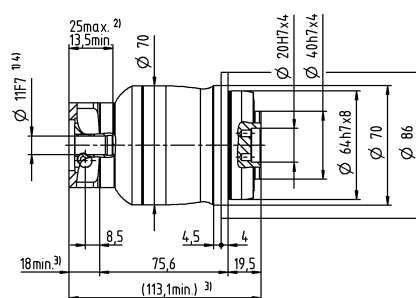

up to 14⁴⁾ (C)
clamping hub
diameter

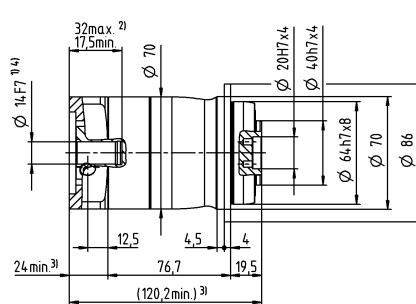

Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPT 025 MA 1-/2-stage

				1-stage		2-stage								
Ratio	i			3	4	9	12	15	16	20	28	30	40	
Max. torque ^{a) b)}	T_{2a}		Nm	185	185	185	185	185	185	185	185	168	185	
			in.lb	1637	1637	1637	1637	1637	1637	1637	1637	1637	1487	1637
Max. acceleration torque (max. 1000 cycles per hour)	T_{2B}		Nm	125	115	125	125	120	115	115	115	105	115	
			in.lb	1106	1018	1106	1106	1062	1018	1018	1018	1018	929	1018
Emergency stop torque ^{a) b)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}		Nm	190	190	190	190	190	190	190	190	190	190	
			in.lb	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682
Permitted average input speed ^{d)} (at T_{2n} and 20 °C ambient temperature)	n_{1N}		rpm	3100	3300	3300	3500	3700	3500	3700	4000	4300	4300	
Max. input speed	n_{1Max}		rpm	7000	7000	8000	8000	8000	8000	8000	8000	8000	8000	
Mean no load running torque ^{b)} (at n_1 = 3000 rpm and 20 °C gearbox temperature)	T_{012}		Nm	0.43	0.35	0.16	0.13	0.12	0.11	0.1	0.09	0.08	0.08	
			in.lb	3.8	3.1	1.4	1.2	1.1	0.97	0.89	0.8	0.71	0.71	
Max. backlash	j_t		arcmin	≤ 8		≤ 10								
Torsional rigidity ^{b)}	C_{t21}		Nm/arcmin	12	12	12	12	12	12	12	12	12	12	
			in.lb/arcmin	106	106	106	106	106	106	106	106	106	106	106
Max. axial force ^{c)}	F_{2AMax}		N	1900		1900								
			lb _f	428		428								
Max. tilting moment	M_{2KMax}		Nm	79		79								
			in.lb	699		699								
Efficiency at full load	η		%	97		95								
Service life	L_h		h	> 20000		> 20000								
Weight (incl. standard adapter plate)	m		kg	4.4		4.7								
			lb _m	9.7		10								
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}		dB(A)	≤ 61		≤ 59								
Max. permitted housing temperature			°C	+90		+90								
			°F	+194		+194								
Ambient temperature			°C	–15 to +40		–15 to +40								
			°F	+5 to +104		+5 to +104								
Lubrication				Lubricated for life										
Direction of rotation				In- and output same direction										
Protection class				IP 64										
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	A	9	J_1	kgcm ²	–	–	0.28	0.23	0.22	0.22	0.21	0.20	0.19	0.19
				10 ⁻³ in.lb.s ²	–	–	0.25	0.2	0.19	0.19	0.19	0.18	0.17	0.17
	B	11	J_1	kgcm ²	–	–	0.3	0.25	0.23	0.24	0.23	0.21	0.21	0.21
				10 ⁻³ in.lb.s ²	–	–	0.27	0.22	0.2	0.21	0.2	0.19	0.19	0.19
	C	14	J_1	kgcm ²	0.75	0.57	0.37	0.32	0.31	0.31	0.3	0.29	0.29	0.28
				10 ⁻³ in.lb.s ²	0.66	0.5	0.33	0.28	0.27	0.27	0.27	0.26	0.26	0.25
	D	16	J_1	kgcm ²	0.9	0.72	0.5	0.45	0.44	0.44	0.43	0.42	0.41	0.41
				10 ⁻³ in.lb.s ²	0.8	0.64	0.44	0.4	0.39	0.39	0.38	0.37	0.36	0.36
	E	19	J_1	kgcm ²	0.99	0.8	0.58	0.53	0.52	0.52	0.51	0.5	0.5	0.49
				10 ⁻³ in.lb.s ²	0.88	0.71	0.51	0.47	0.46	0.46	0.45	0.44	0.44	0.43
	G	24	J_1	kgcm ²	2	1.8	–	–	–	–	–	–	–	–
				10 ⁻³ in.lb.s ²	1.8	1.6	–	–	–	–	–	–	–	–
	H	28	J_1	kgcm ²	1.7	1.5	–	–	–	–	–	–	–	–
				10 ⁻³ in.lb.s ²	1.5	1.3	–	–	–	–	–	–	–	–

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only




^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange




^{d)} Please reduce input speed at higher ambient temperatures

1-stage

up to 19⁴⁾ (E)⁵⁾
clamping hub
diameter


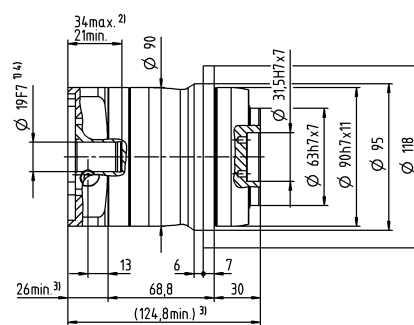



up to 28⁴⁾ (H)
clamping hub
diameter


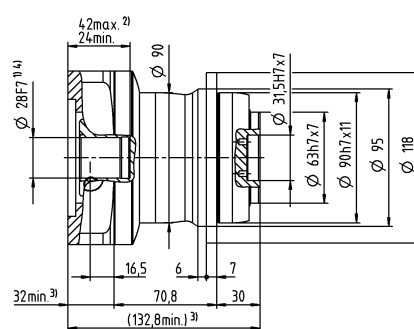



2-stage

up to 14⁴⁾ (C)⁵⁾
clamping hub
diameter

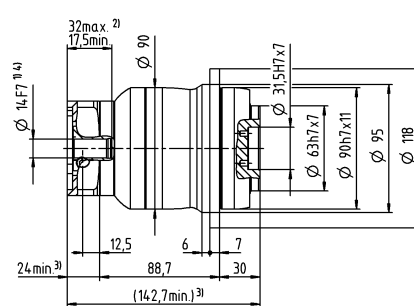

up to 19⁴⁾ (E)
clamping hub
diameter

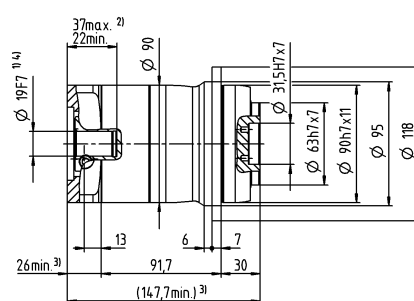

Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPT 035 MA 1-/2-stage

				1-stage		2-stage								
Ratio	i			3	4	9	12	15	16	20	28	30	40	
Max. torque ^{a) b)}	T_{2a}	Nm		380	380	380	380	380	380	380	380	370	380	
		$in.lb$		3363	3363	3363	3363	3363	3363	3363	3363	3275	3363	
Max. acceleration torque (max. 1000 cycles per hour)	T_{2B}	Nm		305	305	305	305	300	305	305	305	270	305	
		$in.lb$		2699	2699	2699	2699	2655	2699	2699	2699	2390	2699	
Emergency stop torque ^{a) b)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm		480	480	480	480	480	480	480	480	480	480	
		$in.lb$		4248	4248	4248	4248	4248	4248	4248	4248	4248	4248	
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}	rpm		2300	2500	3100	3300	3400	3300	3400	3600	3900	3900	
Max. input speed	n_{1Max}	rpm		6000	6000	7000	7000	7000	7000	7000	7000	7000	7000	
Mean no load running torque ^{b)} (at n_1 =3000 rpm and 20 °C gearbox temperature)	T_{012}	Nm		1.7	1.3	0.6	0.48	0.4	0.38	0.33	0.26	0.25	0.21	
		$in.lb$		15	12	5.3	4.2	3.5	3.4	2.9	2.3	2.2	1.9	
Max. backlash	j_t	$arcmin$		≤ 8		≤ 10								
Torsional rigidity ^{b)}	C_{t21}	$Nm/arcmin$		30	30	30	30	30	30	30	30	30	30	
		$in.lb/arcmin$		266	266	266	266	266	266	266	266	266	266	
Max. axial force ^{c)}	F_{2AMax}	N		3500		3500								
		lb_f		788		788								
Max. tilting moment	M_{2KMax}	Nm		134		134								
		$in.lb$		1186		1186								
Efficiency at full load	η	%		97		95								
Service life	L_n	h		> 20000		> 20000								
Weight (incl. standard adapter plate)	m	kg		9.4		9.8								
		lb_m		21		22								
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	$dB(A)$		≤ 65		≤ 61								
Max. permitted housing temperature		°C		+90		+90								
		°F		+194		+194								
Ambient temperature		°C		-15 to +40		-15 to +40								
		°F		+5 to +104		+5 to +104								
Lubrication				Lubricated for life										
Direction of rotation				In- and output same direction										
Protection class				IP 64										
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	C	14	J_1	$kgcm^2$	-	-	0.68	0.63	0.62	0.45	0.44	0.38	0.52	0.37
				$10^{-3} in.lb.s^2$	-	-	0.6	0.56	0.55	0.4	0.39	0.34	0.46	0.33
	D	16	J_1	$kgcm^2$	-	-	0.82	0.78	0.77	0.6	0.58	0.51	0.67	0.52
				$10^{-3} in.lb.s^2$	-	-	0.73	0.69	0.68	0.53	0.51	0.45	0.59	0.46
	E	19	J_1	$kgcm^2$	3.2	2	0.91	0.87	0.86	0.69	0.67	0.61	0.76	0.6
				$10^{-3} in.lb.s^2$	2.8	1.8	0.81	0.77	0.76	0.61	0.59	0.54	0.67	0.53
	G	24	J_1	$kgcm^2$	4	2.8	1.9	1.9	1.9	1.7	1.7	1.6	1.8	1.6
				$10^{-3} in.lb.s^2$	3.5	2.5	1.7	1.7	1.7	1.5	1.5	1.4	1.6	1.4
	H	28	J_1	$kgcm^2$	3.7	2.5	1.7	1.6	1.6	1.4	1.4	1.4	1.5	1.3
				$10^{-3} in.lb.s^2$	3.3	2.2	1.5	1.4	1.4	1.2	1.2	1.2	1.3	1.2
	I	32	J_1	$kgcm^2$	7.7	6.6	-	-	-	-	-	-	-	-
				$10^{-3} in.lb.s^2$	6.8	5.8	-	-	-	-	-	-	-	-
	K	38	J_1	$kgcm^2$	8.9	7.8	-	-	-	-	-	-	-	-
				$10^{-3} in.lb.s^2$	7.9	6.9	-	-	-	-	-	-	-	-

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only




^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange




^{d)} Please reduce input speed at higher ambient temperatures

1-stage

up to 24/28⁴⁾
(G⁵⁾/H)
clamping hub
diameter


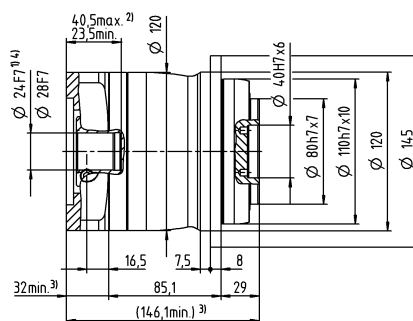



up to 38⁴⁾ (K)
clamping hub
diameter


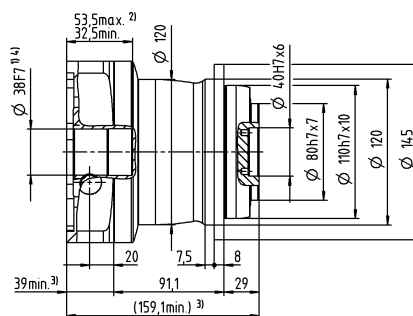



2-stage

up to 19⁴⁾ (E)⁵⁾
clamping hub
diameter

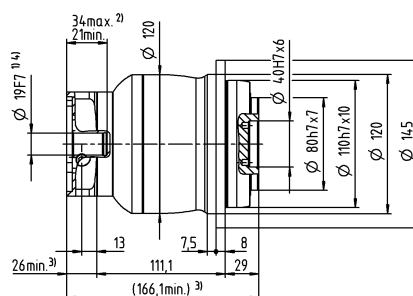

up to 28⁴⁾ (H)
clamping hub
diameter

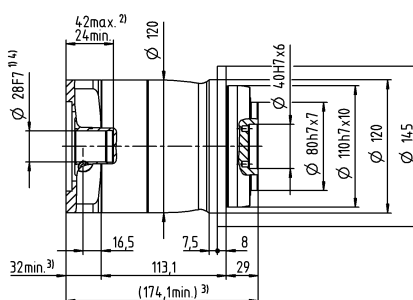

Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated

by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPR 015 MF 1-stage

				1-stage						
Ratio	i			3	4	5	7	8	10	
Max. torque ^{a) b) e)}	T_{2a}		Nm	51	56	64	64	56	56	
			in.lb	451	496	566	566	496	496	
Max. acceleration torque ^{a)} (max. 1000 cycles per hour)	T_{2B}		Nm	32	35	40	40	35	35	
			in.lb	283	310	354	354	310	310	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}		Nm	80	80	80	80	80	80	
			in.lb	708	708	708	708	708	708	
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}		rpm	2600	2800	2900	3400	3400	3600	
Max. input speed	n_{1Max}		rpm	8000	8000	8000	8000	8000	8000	
Mean no load running torque ^{b)} (at n_1 = 3000 rpm and 20 °C gearbox temperature)	T_{012}		Nm	0.98	0.78	0.66	0.52	0.48	0.42	
			in.lb	8.7	6.9	5.8	4.6	4.2	3.7	
Max. backlash	j_t		arcmin	≤ 8						
Torsional rigidity ^{b)}	C_{t21}		Nm/arcmin	3.3	3.3	3.3	3.3	2.8	2.8	
			in.lb/arcmin	29	29	29	29	25	25	
Max. axial force ^{c)}	F_{2AMax}		N	2400						
			lb _f	540						
Max. lateral force ^{c)}	F_{2QMax}		N	2800						
			lb _f	630						
Max. tilting moment	M_{2KMax}		Nm	152						
			in.lb	1345						
Efficiency at full load	η		%	97						
Service life	L_h		h	> 20000						
Weight (incl. standard adapter plate)	m		kg	1.9						
			lb _m	4.2						
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}		dB(A)	≤ 59						
Max. permitted housing temperature			°C	+90						
			°F	+194						
Ambient temperature			°C	–15 to +40						
			°F	+5 to +104						
Lubrication				Lubricated for life						
Direction of rotation				In- and output same direction						
Protection class				IP 65						
Elastomer coupling (recommended product type – validate sizing with cymex®)				ELC-0060BA016.000-X						
Bore diameter of coupling on the application side			mm	X = 012.000 - 032.000						
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	A	9	J_1	kgcm ²	0.25	0.19	0.17	0.14	0.14	0.13
				10 ⁻³ in.lb.s ²	0.22	0.17	0.15	0.12	0.12	0.12
	B	11	J_1	kgcm ²	0.26	0.21	0.18	0.16	0.16	0.15
				10 ⁻³ in.lb.s ²	0.23	0.19	0.16	0.14	0.14	0.13
	C	14	J_1	kgcm ²	0.34	0.28	0.26	0.24	0.23	0.23
				10 ⁻³ in.lb.s ²	0.3	0.25	0.23	0.21	0.2	0.2
	D	16	J_1	kgcm ²	0.47	0.41	0.39	0.36	0.36	0.35
				10 ⁻³ in.lb.s ²	0.42	0.36	0.35	0.32	0.32	0.31
E	19	J_1	kgcm ²	0.55	0.49	0.47	0.45	0.44	0.44	
			10 ⁻³ in.lb.s ²	0.49	0.43	0.42	0.4	0.39	0.39	

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Valid for: Smooth shaft

1-stage

up to 14⁴⁾ (C)⁵⁾
clamping hub
diameter

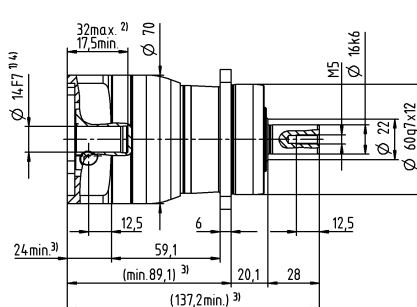

up to 19⁴⁾ (E)
clamping hub
diameter

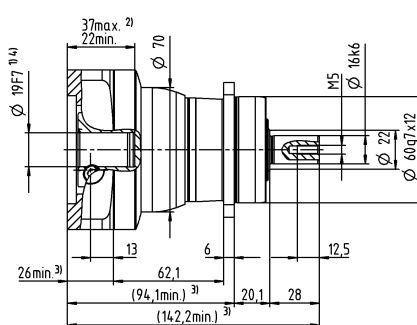



Motor shaft diameter [mm]

Planetary Gearboxes
Value Line

Other output variants

Shaft with key

Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPR 015 MF 2-stage

			2-stage														
Ratio	i		12	15	16	20	25	28	30	32	35	40	50	64	70	100	
Max. torque ^{a) b) e)}	T_{2a}	Nm	51	51	56	56	64	56	51	56	64	56	64	56	64	56	
		in.lb	451	451	496	496	566	496	451	496	566	496	566	496	566	496	
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}	Nm	32	32	35	35	40	35	32	35	40	35	40	35	40	35	
		in.lb	283	283	310	310	354	310	283	310	354	310	354	310	354	310	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	80	80	80	80	80	80	80	80	80	80	80	80	80	80	
		in.lb	708	708	708	708	708	708	708	708	708	708	708	708	708	708	
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)	n_{1N}	rpm	3800	4000	3800	4000	4000	4300	4600	4400	4300	4600	4600	4400	4600	4600	
Max. input speed	n_{1Max}	rpm	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	
Mean no load running torque ^{b)} (at n_1 =3000 rpm and 20 °C gearbox temperature)	T_{012}	Nm	0.34	0.29	0.29	0.25	0.23	0.21	0.21	0.2	0.2	0.19	0.17	0.17	0.16	0.15	
		in.lb	3	2.6	2.6	2.2	2	1.9	1.9	1.8	1.8	1.7	1.5	1.5	1.4	1.3	
Max. backlash	j_t	arcmin	≤ 10														
Torsional rigidity ^{b)}	C_{t21}	Nm/arcmin	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	2.8	3.3	2.8	
		in.lb/arcmin	29	29	29	29	29	29	29	29	29	29	29	25	29	25	
Max. axial force ^{c)}	F_{2AMax}	N	2400														
		lb _f	540														
Max. lateral force ^{c)}	F_{2QMMax}	N	2800														
		lb _f	630														
Max. tilting moment	M_{2KMax}	Nm	152														
		in.lb	1345														
Efficiency at full load	η	%	95														
Service life	L_h	h	> 20000														
Weight (incl. standard adapter plate)	m	kg	2														
		lb _m	4.4														
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex [®])	L_{PA}	dB(A)	≤ 58														
Max. permitted housing temperature		°C	+90														
		°F	+194														
Ambient temperature		°C	−15 to +40														
		°F	+5 to +104														
Lubrication			Lubricated for life														
Direction of rotation			In- and output same direction														
Protection class			IP 65														
Elastomer coupling (recommended product type – validate sizing with cymex [®])			ELC-0060BA016.000-X														
Bore diameter of coupling on the application side		mm	X = 012.000 - 032.000														
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	Z	8	J_1	kgcm ²	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02
				10 ^{−3} in.lb.s ²	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02
	A	9	J_1	kgcm ²	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02
				10 ^{−3} in.lb.s ²	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02
	B	11	J_1	kgcm ²	0.06	0.06	0.05	0.05	0.05	0.05	0.05	0.04	0.05	0.04	0.04	0.04	0.04
				10 ^{−3} in.lb.s ²	0.05	0.05	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04
	C	14	J_1	kgcm ²	0.14	0.14	0.14	0.13	0.13	0.13	0.14	0.13	0.13	0.13	0.13	0.13	0.13
				10 ^{−3} in.lb.s ²	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12

Please use our sizing software cymex[®] for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Valid for: Smooth shaft

2-stage

up to 11⁴⁾ (B)⁵⁾
clamping hub
diameter

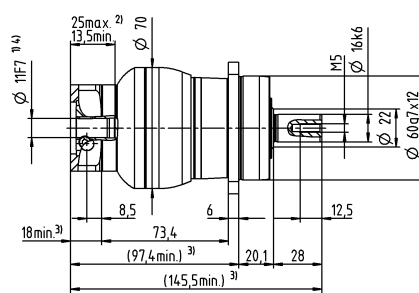


up to 14⁴⁾ (C)
clamping hub
diameter

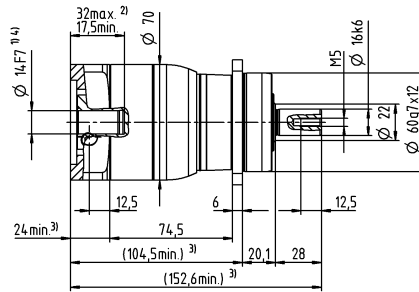


Motor shaft diameter [mm]

Other output variants

Shaft with key



Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPR 025 MF 1-stage

				1-stage						
Ratio	i			3	4	5	7	8	10	
Max. torque ^{a) b) e)}	T_{2a}		Nm	128	152	160	160	144	144	
			in.lb	1133	1345	1416	1416	1275	1275	
Max. acceleration torque ^{a)} (max. 1000 cycles per hour)	T_{2B}		Nm	80	95	100	100	90	90	
			in.lb	708	841	885	885	797	797	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}		Nm	190	190	190	190	190	190	
			in.lb	1682	1682	1682	1682	1682	1682	
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)	n_{1N}		rpm	2400	2600	2700	3000	3100	3300	
Max. input speed	n_{1Max}		rpm	7000	7000	7000	7000	7000	7000	
Mean no load running torque ^{b)} (at n_1 = 3000 rpm and 20 °C gearbox temperature)	T_{012}		Nm	1.9	1.6	1.4	1.1	1.1	0.96	
			in.lb	17	14	12	9.7	9.7	8.5	
Max. backlash	j_t		arcmin	≤ 8						
Torsional rigidity ^{b)}	C_{t21}		Nm/arcmin	9.5	9.5	9.5	9.5	8.5	8.5	
			in.lb/arcmin	84	84	84	84	75	75	
Max. axial force ^{c)}	F_{2AMax}		N	3350						
			lb _f	754						
Max. lateral force ^{c)}	F_{2QMax}		N	4200						
			lb _f	945						
Max. tilting moment	M_{2KMax}		Nm	236						
			in.lb	2089						
Efficiency at full load	η		%	97						
Service life	L_h		h	> 20000						
Weight (incl. standard adapter plate)	m		kg	3.7						
			lb _m	8.2						
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}		dB(A)	≤ 61						
Max. permitted housing temperature			°C	+90						
			°F	+194						
Ambient temperature			°C	–15 to +40						
			°F	+5 to +104						
Lubrication				Lubricated for life						
Direction of rotation				In- and output same direction						
Protection class				IP 65						
Elastomer coupling (recommended product type – validate sizing with cymex®)				ELC-0060BA022.000-X						
Bore diameter of coupling on the application side			mm	X = 012.000 - 032.000						
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	C	14	J_1	kgcm ²	0.58	0.47	0.38	0.3	0.28	0.26
				10 ⁻³ in.lb.s ²	0.51	0.42	0.34	0.27	0.25	0.23
	D	16	J_1	kgcm ²	0.73	0.62	0.53	0.43	0.42	0.4
				10 ⁻³ in.lb.s ²	0.65	0.55	0.47	0.38	0.37	0.35
	E	19	J_1	kgcm ²	0.81	0.71	0.61	0.53	0.51	0.49
				10 ⁻³ in.lb.s ²	0.72	0.63	0.54	0.47	0.45	0.43
	G	24	J_1	kgcm ²	1.8	1.7	1.6	1.6	1.5	1.5
				10 ⁻³ in.lb.s ²	1.6	1.5	1.4	1.4	1.3	1.3
H	28	J_1	kgcm ²	1.6	1.4	1.4	1.3	1.3	1.2	
			10 ⁻³ in.lb.s ²	1.4	1.2	1.2	1.2	1.2	1.1	

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures


^{e)} Valid for: Smooth shaft

1-stage

up to 19⁴⁾ (E)⁵⁾
clamping hub
diameter

up to 28⁴⁾ (H)
clamping hub
diameter

Motor shaft diameter [mm]


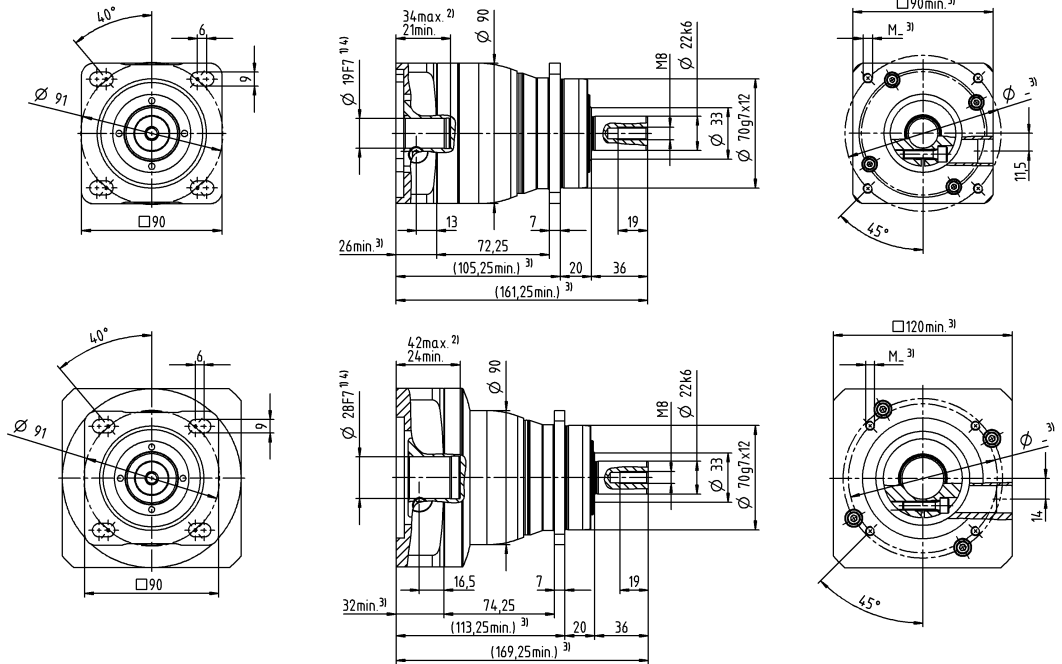


Planetary Gearboxes
Value Line

Other output variants

Shaft with key

Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPR 025 MF 2-stage

			2-stage														
Ratio	i		9	12	15	16	20	25	28	30	32	35	40	50	64	70	100
Max. torque ^{a) b) e)}	T_{2a}	Nm	128	128	128	152	152	160	152	128	144	160	152	160	144	160	144
		in.lb	1133	1133	1133	1345	1345	1416	1345	1133	1275	1416	1345	1416	1275	1416	1275
Max. acceleration torque ^{a)} (max. 1000 cycles per hour)	T_{2B}	Nm	80	80	80	95	95	100	95	80	90	100	95	100	90	100	90
		in.lb	708	708	708	841	841	885	841	708	797	885	841	885	797	885	797
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	190	190	190	190	190	190	190	190	190	190	190	190	190	190	190
		in.lb	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}	rpm	2800	3500	3700	3500	3700	3700	4000	4300	4100	4000	4300	4300	4100	4300	4300
Max. input speed	n_{1Max}	rpm	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000
Mean no load running torque ^{b)} (at $n_1 = 3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	0.67	0.55	0.47	0.46	0.4	0.36	0.34	0.33	0.32	0.31	0.29	0.27	0.25	0.25	0.23
		in.lb	5.9	4.9	4.2	4.1	3.5	3.2	3	2.9	2.8	2.7	2.6	2.4	2.2	2.2	2
Max. backlash	j_t	arcmin	≤ 10														
Torsional rigidity ^{b)}	C_{t21}	Nm/arcmin	10	10	10	10	10	9.5	10	10	10	9.5	10	9.5	8.5	9.5	8.5
		in.lb/arcmin	89	89	89	89	89	84	89	89	89	84	89	84	75	84	75
Max. axial force ^{c)}	F_{2AMax}	N	3350														
		lb _f	754														
Max. lateral force ^{c)}	F_{2QMMax}	N	4200														
		lb _f	945														
Max. tilting moment	M_{2KMMax}	Nm	236														
		in.lb	2089														
Efficiency at full load	η	%	95														
Service life	L_h	h	> 20000														
Weight (incl. standard adapter plate)	m	kg	4														
		lb _m	8.8														
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 59														
Max. permitted housing temperature		°C	+90														
		°F	+194														
Ambient temperature		°C	-15 to +40														
		°F	+5 to +104														
Lubrication			Lubricated for life														
Direction of rotation			In- and output same direction														
Protection class			IP 65														
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0060BA022.000-X														
Bore diameter of coupling on the application side		mm	X = 012.000 - 032.000														
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	A	9	J_1	kgcm ²	0.26	0.22	0.21	0.21	0.2	0.2	0.19	0.19	0.19	0.19	0.19	0.19	0.19
				10 ⁻³ in.lb.s ²	0.23	0.19	0.19	0.19	0.18	0.18	0.17	0.17	0.17	0.17	0.17	0.17	0.17
	B	11	J_1	kgcm ²	0.28	0.24	0.23	0.23	0.22	0.22	0.21	0.21	0.21	0.21	0.21	0.21	0.21
				10 ⁻³ in.lb.s ²	0.25	0.21	0.2	0.2	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.19
	C	14	J_1	kgcm ²	0.35	0.31	0.3	0.3	0.3	0.29	0.29	0.28	0.28	0.28	0.28	0.28	0.28
				10 ⁻³ in.lb.s ²	0.31	0.27	0.27	0.27	0.27	0.26	0.26	0.25	0.25	0.25	0.25	0.25	0.25
	D	16	J_1	kgcm ²	0.48	0.44	0.43	0.43	0.42	0.42	0.41	0.41	0.41	0.41	0.41	0.41	0.41
				10 ⁻³ in.lb.s ²	0.42	0.39	0.38	0.38	0.37	0.37	0.36	0.36	0.36	0.36	0.36	0.36	0.36
	E	19	J_1	kgcm ²	0.56	0.52	0.51	0.52	0.51	0.5	0.5	0.5	0.5	0.5	0.49	0.49	0.49
				10 ⁻³ in.lb.s ²	0.5	0.46	0.45	0.46	0.45	0.44	0.44	0.44	0.44	0.43	0.43	0.43	0.43

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Valid for: Smooth shaft

2-stage

up to 14⁴⁾ (C)⁵⁾
clamping hub
diameter

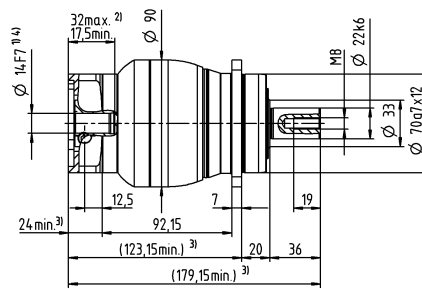

up to 19⁴⁾ (E)
clamping hub
diameter

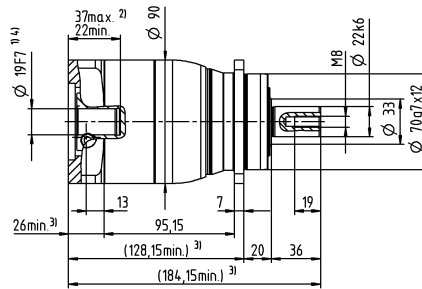



Motor shaft diameter [mm]

Planetary Gearboxes
Value Line

Other output variants

Shaft with key

Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPR 035 MF 1-stage

				1-stage						
Ratio	i			3	4	5	7	8	10	
Max. torque ^{a) b) e)}	T_{2a}		Nm	320	408	400	400	352	352	
			in.lb	2832	3611	3540	3540	3115	3115	
Max. acceleration torque ^{a)} (max. 1000 cycles per hour)	T_{2B}		Nm	200	255	250	250	220	220	
			in.lb	1770	2257	2213	2213	1947	1947	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}		Nm	500	500	500	500	500	500	
			in.lb	4425	4425	4425	4425	4425	4425	
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)	n_{1N}		rpm	1800	2000	2000	2300	2400	2500	
Max. input speed	n_{1Max}		rpm	6000	6000	6000	6000	6000	6000	
Mean no load running torque ^{b)} (at n_1 = 3000 rpm and 20 °C gearbox temperature)	T_{012}		Nm	3.5	2.8	2.4	1.9	1.8	1.6	
			in.lb	31	25	21	17	16	14	
Max. backlash	j_t		arcmin	≤ 8						
Torsional rigidity ^{b)}	C_{t21}		Nm/arcmin	25	25	25	25	22	22	
			in.lb/arcmin	221	221	221	221	195	195	
Max. axial force ^{c)}	F_{2AMax}		N	5650						
			lb _f	1271						
Max. lateral force ^{c)}	F_{2QMax}		N	6600						
			lb _f	1485						
Max. tilting moment	M_{2KMax}		Nm	487						
			in.lb	4310						
Efficiency at full load	η		%	97						
Service life	L_h		h	> 20000						
Weight (incl. standard adapter plate)	m		kg	8.6						
			lb _m	19						
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}		dB(A)	≤ 65						
Max. permitted housing temperature			°C	+90						
			°F	+194						
Ambient temperature			°C	–15 to +40						
			°F	+5 to +104						
Lubrication				Lubricated for life						
Direction of rotation				In- and output same direction						
Protection class				IP 65						
Elastomer coupling (recommended product type – validate sizing with cymex®)				ELC-0150BA032.000-X						
Bore diameter of coupling on the application side			mm	X = 019.000 - 036.000						
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	E	19	J_1	kgcm ²	2.5	1.7	1.3	1	0.94	0.87
				10 ⁻³ in.lb.s ²	2.2	1.5	1.2	0.89	0.83	0.77
	G	24	J_1	kgcm ²	3.3	2.4	2.1	1.8	1.7	1.6
				10 ⁻³ in.lb.s ²	2.9	2.1	1.9	1.6	1.5	1.4
	H	28	J_1	kgcm ²	3	2.2	1.8	1.5	1.4	1.4
				10 ⁻³ in.lb.s ²	2.7	1.9	1.6	1.3	1.2	1.2
	I	32	J_1	kgcm ²	7.1	6.2	5.9	5.6	5.5	5.4
				10 ⁻³ in.lb.s ²	6.3	5.5	5.2	5	4.9	4.8
	K	38	J_1	kgcm ²	8.3	7.4	7.1	6.7	6.6	6.6
				10 ⁻³ in.lb.s ²	7.3	6.5	6.3	5.9	5.8	5.8

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Valid for: Smooth shaft

1-stage

up to 24/28⁴⁾
(G⁵⁾/H)
clamping hub
diameter

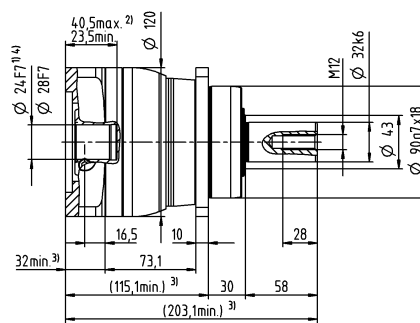

up to 38⁴⁾ (K)
clamping hub
diameter

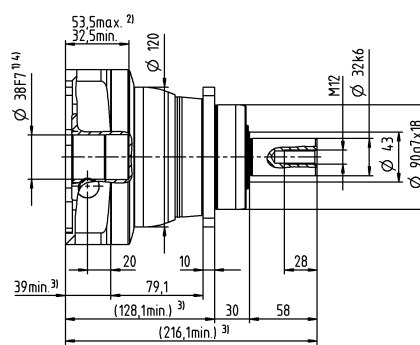



Motor shaft diameter [mm]

Planetary Gearboxes
Value Line

Other output variants

Shaft with key

Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPR 035 MF 2-stage

				2-stage															
Ratio		i		9	12	15	16	20	25	28	30	32	35	40	50	64	70	100	
Max. torque ^{a) b) e)}		T_{2a}	Nm	320	320	320	408	408	400	408	320	408	400	408	400	352	400	352	
			in.lb	2832	2832	2832	3611	3611	3540	3611	2832	3611	3540	3611	3540	3115	3540	3115	
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)		T_{2B}	Nm	200	200	200	255	255	250	255	200	255	250	255	250	220	250	220	
			in.lb	1770	1770	1770	2257	2257	2213	2257	1770	2257	2213	2257	2213	1947	2213	1947	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)		T_{2Not}	Nm	500	500	500	500	500	500	500	500	500	500	500	500	500	500	500	
			in.lb	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425	
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)		n_{1N}	rpm	2600	3300	3400	3300	3400	3400	3600	3900	3700	3600	3900	3900	3700	3900	3900	
Max. input speed		n_{1Max}	rpm	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	
Mean no load running torque ^{b)} (at n_1 = 3000 rpm and 20 °C gearbox temperature)		T_{012}	Nm	1.7	1.4	1.2	1.2	1.1	1	0.93	0.88	0.88	0.87	0.81	0.77	0.75	0.72	0.68	
			in.lb	15	12	11	11	9.7	8.9	8.2	7.8	7.8	7.7	7.2	6.8	6.6	6.4	6	
Max. backlash		j_t	arcmin	≤ 10															
Torsional rigidity ^{b)}		C_{t21}	Nm/arcmin	25	25	25	25	25	25	25	25	25	25	25	25	22	25	22	
			in.lb/arcmin	221	221	221	221	221	221	221	221	221	221	221	221	195	221	195	
Max. axial force ^{c)}		F_{2AMax}	N	5650															
			lb _f	1271															
Max. lateral force ^{c)}		F_{2QMMax}	N	6600															
			lb _f	1485															
Max. tilting moment		M_{2KMax}	Nm	487															
			in.lb	4310															
Efficiency at full load		η	%	95															
Service life		L_h	h	> 20000															
Weight (incl. standard adapter plate)		m	kg	9															
			lb _m	20															
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)		L_{PA}	dB(A)	≤ 61															
Max. permitted housing temperature			°C	+90															
			°F	+194															
Ambient temperature			°C	−15 to +40															
			°F	+5 to +104															
Lubrication			Lubricated for life																
Direction of rotation			In- and output same direction																
Protection class			IP 65																
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0150BA032.000-X																
Bore diameter of coupling on the application side			mm	X = 019.000 - 036.000															
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	C	14	J_1	kgcm ²	0.6	0.59	0.6	0.43	0.42	0.36	0.37	0.52	0.38	0.32	0.36	0.31	0.26	0.27	0.24
				10 ⁻³ in.lb.s ²	0.53	0.52	0.53	0.38	0.37	0.32	0.33	0.46	0.34	0.28	0.32	0.27	0.23	0.24	0.21
	D	16	J_1	kgcm ²	0.75	0.74	0.74	0.58	0.57	0.5	0.5	0.67	0.52	0.45	0.51	0.46	0.4	0.41	0.39
				10 ⁻³ in.lb.s ²	0.66	0.65	0.65	0.51	0.5	0.44	0.44	0.59	0.46	0.4	0.45	0.41	0.35	0.36	0.35
	E	19	J_1	kgcm ²	0.84	0.83	0.83	0.66	0.65	0.59	0.6	0.75	0.61	0.55	0.6	0.54	0.49	0.5	0.48
				10 ⁻³ in.lb.s ²	0.74	0.73	0.73	0.58	0.58	0.52	0.53	0.66	0.54	0.49	0.53	0.48	0.43	0.44	0.42
	G	24	J_1	kgcm ²	1.9	1.9	1.9	1.7	1.7	1.6	1.6	1.8	1.6	1.6	1.6	1.6	1.5	1.5	1.5
				10 ⁻³ in.lb.s ²	1.7	1.6	1.7	1.5	1.5	1.4	1.5	1.6	1.5	1.4	1.4	1.4	1.3	1.4	1.3
	H	28	J_1	kgcm ²	1.6	1.6	1.6	1.4	1.4	1.3	1.3	1.5	1.4	1.3	1.3	1.3	1.2	1.2	1.2
				10 ⁻³ in.lb.s ²	1.4	1.4	1.4	1.2	1.2	1.2	1.2	1.3	1.2	1.1	1.2	1.1	1.1	1.1	1.1

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Valid for: Smooth shaft

2-stage

up to 19⁴⁾ (E)⁵⁾
clamping hub
diameter

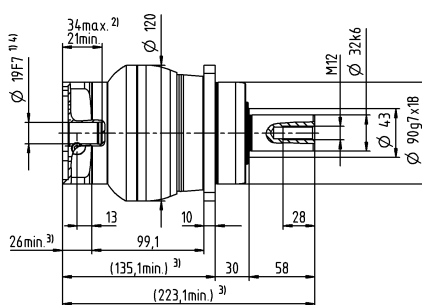

up to 28⁴⁾ (H)
clamping hub
diameter

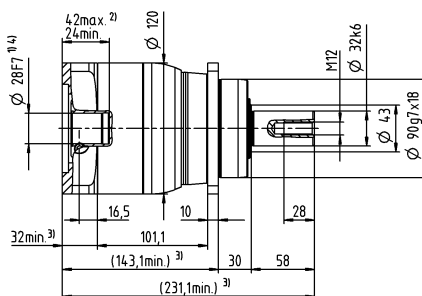



Motor shaft diameter [mm]

Planetary Gearboxes
Value Line

Other output variants

Shaft with key

Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPR 045 MF 1-/2-stage

				1-stage			2-stage					
Ratio		i		5	8	10	25	32	50	64	100	
Max. torque ^{a) b) e)}		T_{2a}	Nm	800	640	640	700	640	700	640	640	
			in.lb	7081	5665	5665	6196	5665	6196	5665	5665	
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)		T_{2B}	Nm	500	400	400	500	400	500	400	400	
			in.lb	4425	3540	3540	4425	3540	4425	3540	3540	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)		T_{2Not}	Nm	1000	1000	1000	1000	1000	1000	1000	1000	
			in.lb	8851	8851	8851	8851	8851	8851	8851	8851	
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)		n_{1N}	rpm	1600	1800	1900	2600	2500	3000	2900	3000	
Max. input speed		n_{1Max}	rpm	4000	4000	4000	6000	6000	6000	6000	6000	
Mean no load running torque ^{b)} (at n_1 = 3000 rpm and 20 °C gearbox temperature)		T_{012}	Nm	4.6	3.1	2.6	1.6	1.5	1.2	1.1	0.97	
			in.lb	41	27	23	14	13	11	9.7	8.6	
Max. backlash		j_t	arcmin	≤ 8			≤ 10					
Torsional rigidity ^{b)}		C_{t21}	Nm/arcmin	55	44	44	55	44	55	44	44	
			in.lb/arcmin	487	389	389	487	389	487	389	389	
Max. axial force ^{c)}		F_{2AMax}	N	9870			9870					
			lb _f	2221			2221					
Max. lateral force ^{c)}		F_{2QMax}	N	9900			9900					
			lb _f	2228			2228					
Max. tilting moment		M_{2KMax}	Nm	952			952					
			in.lb	8426			8426					
Efficiency at full load		η	%	97			95					
Service life		L_h	h	> 20000			> 20000					
Weight (incl. standard adapter plate)		m	kg	19			20					
			lb _m	42			44					
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)		L_{PA}	dB(A)	≤ 68			≤ 65					
Max. permitted housing temperature			°C	+90			+90					
			°F	+194			+194					
Ambient temperature			°C	–15 to +40			–15 to +40					
			°F	+5 to +104			+5 to +104					
Lubrication				Lubricated for life								
Direction of rotation				In- and output same direction								
Protection class				IP 65								
Elastomer coupling (recommended product type – validate sizing with cymex®)				ELC-0300BA040.000-X								
Bore diameter of coupling on the application side			mm	X = 020.000 - 045.000								
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	E	19	J_1	kgcm ²	–	–	–	1.2	1.1	1	0.88	0.82
				10 ⁻³ in.lb.s ²	–	–	–	1.1	0.97	0.89	0.78	0.73
	G	24	J_1	kgcm ²	–	–	–	2	1.9	1.8	1.7	1.6
				10 ⁻³ in.lb.s ²	–	–	–	1.8	1.7	1.6	1.5	1.4
	H	28	J_1	kgcm ²	–	–	–	1.7	1.6	1.5	1.4	1.3
				10 ⁻³ in.lb.s ²	–	–	–	1.5	1.4	1.3	1.2	1.2
	I	32	J_1	kgcm ²	–	–	–	5.8	5.7	5.6	5.4	5.4
				10 ⁻³ in.lb.s ²	–	–	–	5.1	5	5	4.8	4.8
K	38	J_1	kgcm ²	8.7	7.3	7.2	7	6.9	6.8	6.6	6.5	
			10 ⁻³ in.lb.s ²	7.7	6.5	6.4	6.2	6.1	6	5.8	5.8	

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft







1-stage

up to 38⁴⁾ (K)⁵⁾
clamping hub
diameter

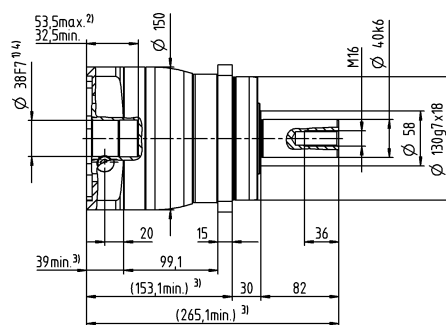

2-stage

up to 28⁴⁾ (H)⁵⁾
clamping hub
diameter

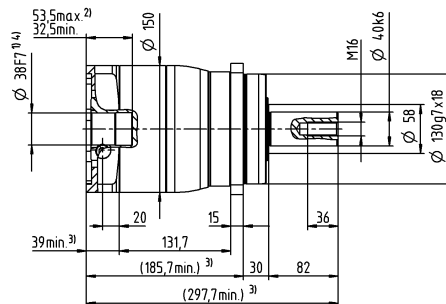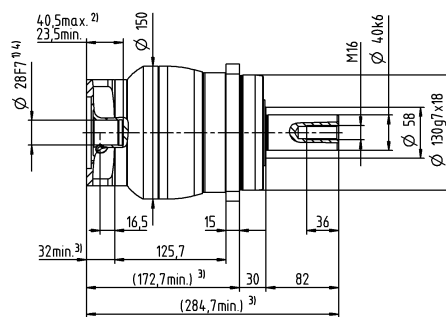

Motor shaft diameter [mm]



up to 38⁴⁾ (K)
clamping hub
diameter

Planetary Gearboxes
Value Line

Other output variants

Shaft with key

Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated

by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPR 015 MA 1- / 2-stage

			1-stage		2-stage								
Ratio	i		3	4	12	15	16	20	28	30	40		
Max. torque ^{a) b) e)}	T_{2a}	Nm	80	67	62	67	67	67	67	62	67		
		in.lb	708	593	549	593	593	593	593	549	593		
Max. acceleration torque ^{a)} (max. 1000 cycles per hour)	T_{2B}	Nm	55	42	39	42	42	42	42	39	42		
		in.lb	487	372	345	372	372	372	372	345	372		
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	80	80	80	80	80	80	80	80	80		
		in.lb	708	708	708	708	708	708	708	708	708		
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}	rpm	2600	2800	3800	4000	3800	4000	4300	4600	4600		
Max. input speed	n_{1Max}	rpm	8000	8000	10000	10000	10000	10000	10000	10000	10000		
Mean no load running torque ^{b)} (at n_1 = 3000 rpm and 20 °C gearbox temperature)	T_{012}	Nm	0.98	0.78	0.34	0.29	0.29	0.25	0.21	0.21	0.19		
		in.lb	8.7	6.9	3	2.6	2.6	2.2	1.9	1.9	1.7		
Max. backlash	j_t	arcmin	≤ 8		≤ 10								
Torsional rigidity ^{b)}	C_{t21}	Nm/arcmin	4	4	4	4	4	4	4	4	4		
		in.lb/arcmin	35	35	35	35	35	35	35	35	35		
Max. axial force ^{c)}	F_{2AMax}	N	2400		2400								
		lb _f	540		540								
Max. lateral force ^{c)}	F_{2QMax}	N	2800		2800								
		lb _f	630		630								
Max. tilting moment	M_{2KMax}	Nm	152		152								
		in.lb	1345		1345								
Efficiency at full load	η	%	97		95								
Service life	L_h	h	> 20000		> 20000								
Weight (incl. standard adapter plate)	m	kg	1.9		2								
		lb _m	4.2		4.4								
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 59		≤ 58								
Max. permitted housing temperature		°C	+90		+90								
		°F	+194		+194								
Ambient temperature		°C	–15 to +40		–15 to +40								
		°F	+5 to +104		+5 to +104								
Lubrication			Lubricated for life										
Direction of rotation			In- and output same direction										
Protection class			IP 65										
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0060BA016.000-X										
Bore diameter of coupling on the application side		mm	X = 012.000 - 032.000										
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	Z	8	J_1	kgcm ²	–	–	0.04	0.04	0.03	0.03	0.03	0.03	
				10 ⁻³ in.lb.s ²	–	–	0.04	0.04	0.03	0.03	0.03	0.03	0.03
	A	9	J_1	kgcm ²	0.25	0.19	0.04	0.04	0.03	0.03	0.03	0.03	
				10 ⁻³ in.lb.s ²	0.22	0.17	0.04	0.04	0.03	0.03	0.03	0.03	0.03
	B	11	J_1	kgcm ²	0.26	0.21	0.06	0.06	0.05	0.05	0.05	0.05	
				10 ⁻³ in.lb.s ²	0.23	0.19	0.05	0.05	0.04	0.04	0.04	0.04	0.04
	C	14	J_1	kgcm ²	0.34	0.28	0.14	0.14	0.14	0.13	0.13	0.14	
				10 ⁻³ in.lb.s ²	0.3	0.25	0.12	0.12	0.12	0.12	0.12	0.12	0.12
	D	16	J_1	kgcm ²	0.47	0.41	–	–	–	–	–	–	–
				10 ⁻³ in.lb.s ²	0.42	0.36	–	–	–	–	–	–	–
	E	19	J_1	kgcm ²	0.55	0.49	–	–	–	–	–	–	–
				10 ⁻³ in.lb.s ²	0.49	0.43	–	–	–	–	–	–	–

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Valid for: Smooth shaft

1-stage

up to 14⁴⁾ (C)⁵⁾
clamping hub
diameter


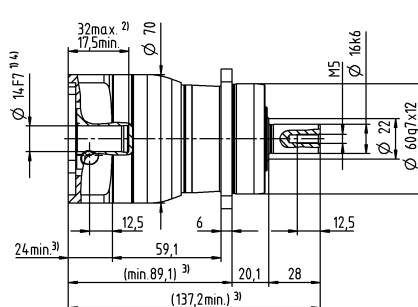



up to 19⁴⁾ (E)
clamping hub
diameter


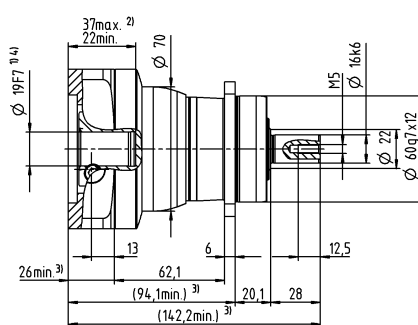



2-stage

up to 11⁴⁾ (B)⁵⁾
clamping hub
diameter

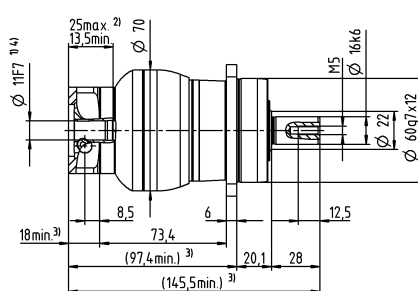


up to 14⁴⁾ (C)
clamping hub
diameter

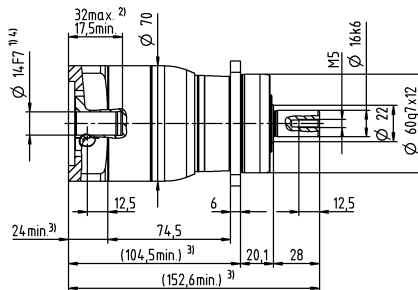


Motor shaft diameter [mm]

Other output variants

Shaft with key



Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated

by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPR 025 MA 1- / 2-stage

			1-stage		2-stage									
Ratio	i		3	4	9	12	15	16	20	28	30	40		
Max. torque ^{a) b) e)}	T_{2a}	Nm	185	185	185	185	185	185	185	185	168	185		
		$in.lb$	1637	1637	1637	1637	1637	1637	1637	1637	1637	1487	1637	
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}	Nm	125	115	125	125	120	115	115	115	105	115		
		$in.lb$	1106	1018	1106	1106	1062	1018	1018	1018	929	1018		
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	190	190	190	190	190	190	190	190	190	190		
		$in.lb$	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}	rpm	2400	2600	2800	3500	3700	3500	3700	4000	4300	4300		
Max. input speed	n_{1Max}	rpm	7000	7000	8000	8000	8000	8000	8000	8000	8000	8000		
Mean no load running torque ^{b)} (at n_1 =3000 rpm and 20 °C gearbox temperature)	T_{012}	Nm	1.8	1.5	0.67	0.55	0.47	0.46	0.4	0.34	0.33	0.29		
		$in.lb$	16	13	5.9	4.9	4.2	4.1	3.5	3	2.9	2.6		
Max. backlash	j_t	$arcmin$	≤ 8		≤ 10									
Torsional rigidity ^{b)}	C_{t21}	$Nm/arcmin$	12	12	12	12	12	12	12	12	12	12		
		$in.lb/arcmin$	106	106	106	106	106	106	106	106	106	106	106	
Max. axial force ^{c)}	F_{2AMax}	N	3350		3350									
		lb_f	754		754									
Max. lateral force ^{c)}	F_{2QMax}	N	4200		4200									
		lb_f	945		945									
Max. tilting moment	M_{2KMax}	Nm	236		236									
		$in.lb$	2089		2089									
Efficiency at full load	η	%	97		95									
Service life	L_h	h	> 20000		> 20000									
Weight (incl. standard adapter plate)	m	kg	3.7		4									
		lb_m	8.2		8.8									
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	$dB(A)$	≤ 61		≤ 59									
Max. permitted housing temperature		°C	+90		+90									
		°F	+194		+194									
Ambient temperature		°C	−15 to +40		−15 to +40									
		°F	+5 to +104		+5 to +104									
Lubrication			Lubricated for life											
Direction of rotation			In- and output same direction											
Protection class			IP 65											
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0060BA022.000-X											
Bore diameter of coupling on the application side		mm	X = 012.000 - 032.000											
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	A	9	J_1	$kgcm^2$	–	–	0.26	0.22	0.21	0.21	0.2	0.19	0.19	0.19
				$10^{-3} in.lb.s^2$	–	–	0.23	0.19	0.19	0.19	0.18	0.17	0.17	0.17
	B	11	J_1	$kgcm^2$	–	–	0.28	0.24	0.23	0.23	0.22	0.21	0.21	0.21
				$10^{-3} in.lb.s^2$	–	–	0.25	0.21	0.2	0.2	0.19	0.19	0.19	0.19
	C	14	J_1	$kgcm^2$	0.58	0.47	0.35	0.31	0.3	0.3	0.3	0.29	0.28	0.28
				$10^{-3} in.lb.s^2$	0.51	0.42	0.31	0.27	0.27	0.27	0.27	0.26	0.25	0.25
	D	16	J_1	$kgcm^2$	0.73	0.62	0.48	0.44	0.43	0.43	0.42	0.41	0.41	0.41
				$10^{-3} in.lb.s^2$	0.65	0.55	0.42	0.39	0.38	0.38	0.37	0.36	0.36	0.36
	E	19	J_1	$kgcm^2$	0.81	0.71	0.56	0.52	0.51	0.52	0.51	0.5	0.5	0.49
				$10^{-3} in.lb.s^2$	0.72	0.63	0.5	0.46	0.45	0.46	0.45	0.44	0.44	0.43
	G	24	J_1	$kgcm^2$	1.8	1.7	–	–	–	–	–	–	–	–
				$10^{-3} in.lb.s^2$	1.6	1.5	–	–	–	–	–	–	–	–
	H	28	J_1	$kgcm^2$	1.6	1.4	–	–	–	–	–	–	–	–
				$10^{-3} in.lb.s^2$	1.4	1.2	–	–	–	–	–	–	–	–

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Valid for: Smooth shaft

1-stage

up to 19⁴⁾ (E)⁵⁾
clamping hub
diameter


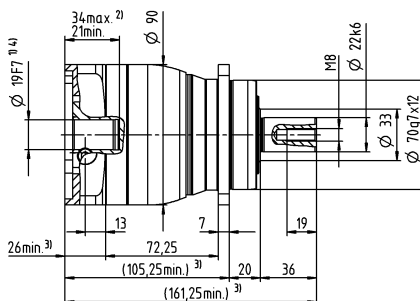



up to 28⁴⁾ (H)
clamping hub
diameter


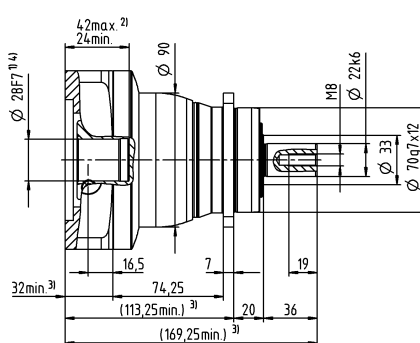



2-stage

up to 14⁴⁾ (C)⁵⁾
clamping hub
diameter

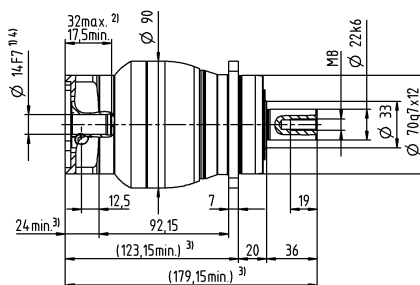


up to 19⁴⁾ (E)
clamping hub
diameter

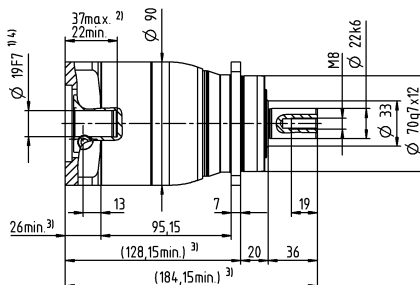


Motor shaft diameter [mm]

Other output variants

Shaft with key



Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated

by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPR 035 MA 1- / 2-stage

				1-stage		2-stage								
Ratio	i			3	4	9	12	15	16	20	28	30	40	
Max. torque ^{a) b) e)}	T_{2a}		<i>Nm</i>	480	480	480	480	480	480	480	480	432	480	
			<i>in.lb</i>	4248	4248	4248	4248	4248	4248	4248	4248	4248	3824	4248
Max. acceleration torque ^{a)} (max. 1000 cycles per hour)	T_{2B}		<i>Nm</i>	305	305	305	305	300	305	305	305	270	305	
			<i>in.lb</i>	2699	2699	2699	2699	2655	2699	2699	2699	2699	2390	2699
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}		<i>Nm</i>	500	500	500	500	500	500	500	500	500	500	
			<i>in.lb</i>	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)	n_{1N}		<i>rpm</i>	1800	2000	2600	3300	3400	3300	3400	3600	3900	3900	
Max. input speed	n_{1Max}		<i>rpm</i>	6000	6000	7000	7000	7000	7000	7000	7000	7000	7000	
Mean no load running torque ^{b)} (at n_1 =3000 rpm and 20 °C gearbox temperature)	T_{012}		<i>Nm</i>	3.5	2.8	1.7	1.4	1.2	1.2	1.1	0.93	0.88	0.81	
			<i>in.lb</i>	31	25	15	12	11	11	9.7	8.2	7.8	7.2	
Max. backlash	j_t		<i>arcmin</i>	≤ 8		≤ 10								
Torsional rigidity ^{b)}	C_{t21}		<i>Nm/arcmin</i>	30	30	30	30	30	30	30	30	30	30	
			<i>in.lb/arcmin</i>	266	266	266	266	266	266	266	266	266	266	266
Max. axial force ^{c)}	F_{2AMax}		<i>N</i>	5650		5650								
			<i>lb_f</i>	1271		1271								
Max. lateral force ^{c)}	F_{2QMMax}		<i>N</i>	6600		6600								
			<i>lb_f</i>	1485		1485								
Max. tilting moment	M_{2KMax}		<i>Nm</i>	487		487								
			<i>in.lb</i>	4310		4310								
Efficiency at full load	η		%	97		95								
Service life	L_h		<i>h</i>	> 20000		> 20000								
Weight (incl. standard adapter plate)	m		<i>kg</i>	8.6		9								
			<i>lb_m</i>	19		20								
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}		<i>dB(A)</i>	≤ 65		≤ 61								
Max. permitted housing temperature			°C	+90		+90								
			°F	+194		+194								
Ambient temperature			°C	–15 to +40		–15 to +40								
			°F	+5 to +104		+5 to +104								
Lubrication				Lubricated for life										
Direction of rotation				In- and output same direction										
Protection class				IP 65										
Elastomer coupling (recommended product type – validate sizing with cymex®)				ELC-0150BA032.000-X										
Bore diameter of coupling on the application side				X = 019.000 - 036.000										
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	C	14	J_1	<i>kgcm²</i>	–	–	0.6	0.59	0.6	0.43	0.42	0.37	0.52	0.36
				<i>10⁻³ in.lb.s²</i>	–	–	0.53	0.52	0.53	0.38	0.37	0.33	0.46	0.32
	D	16	J_1	<i>kgcm²</i>	–	–	0.75	0.74	0.74	0.58	0.57	0.5	0.67	0.51
				<i>10⁻³ in.lb.s²</i>	–	–	0.66	0.65	0.65	0.51	0.5	0.44	0.59	0.45
	E	19	J_1	<i>kgcm²</i>	2.5	1.7	0.84	0.83	0.83	0.66	0.65	0.6	0.75	0.6
				<i>10⁻³ in.lb.s²</i>	2.2	1.5	0.74	0.73	0.73	0.58	0.58	0.53	0.66	0.53
	G	24	J_1	<i>kgcm²</i>	3.3	2.4	1.9	1.9	1.9	1.7	1.7	1.6	1.8	1.6
				<i>10⁻³ in.lb.s²</i>	2.9	2.1	1.7	1.6	1.7	1.5	1.5	1.5	1.6	1.4
	H	28	J_1	<i>kgcm²</i>	3	2.2	1.6	1.6	1.6	1.4	1.4	1.3	1.5	1.3
				<i>10⁻³ in.lb.s²</i>	2.7	1.9	1.4	1.4	1.4	1.2	1.2	1.2	1.3	1.2
	I	32	J_1	<i>kgcm²</i>	7.1	6.2	–	–	–	–	–	–	–	–
				<i>10⁻³ in.lb.s²</i>	6.3	5.5	–	–	–	–	–	–	–	–
	K	38	J_1	<i>kgcm²</i>	8.3	7.4	–	–	–	–	–	–	–	–
				<i>10⁻³ in.lb.s²</i>	7.3	6.5	–	–	–	–	–	–	–	–

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Valid for: Smooth shaft

1-stage

up to 24/28⁴⁾
(G⁵⁾/H)
clamping hub
diameter


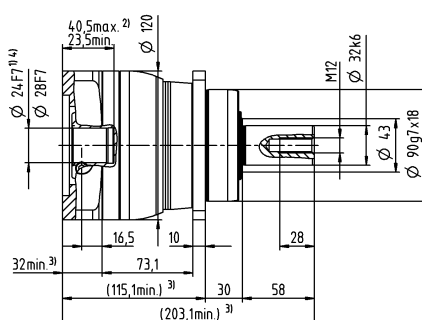



up to 38⁴⁾ (K)
clamping hub
diameter


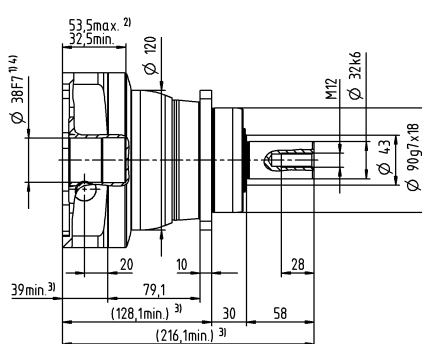



2-stage

up to 19⁴⁾ (E)⁵⁾
clamping hub
diameter

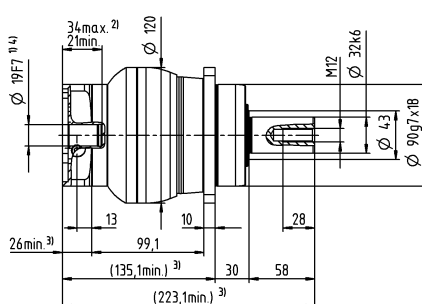


up to 28⁴⁾ (H)
clamping hub
diameter

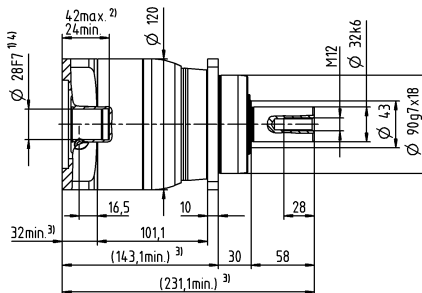


Motor shaft diameter [mm]

Other output variants

Shaft with key



Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated

by a bushing with a minimum thickness of 1 mm


⁵⁾ Standard clamping hub diameter

alpha Value Line

BEVEL GEARBOXES

NPK / NPLK / NPSK / NPTK / NPRK

The bevel gears of the alpha Value Line are the fitting solution for situations with limited mounting space. The flexible output shapes and gear ratios in combination with the extremely compact angle section offer comprehensive design freedom.

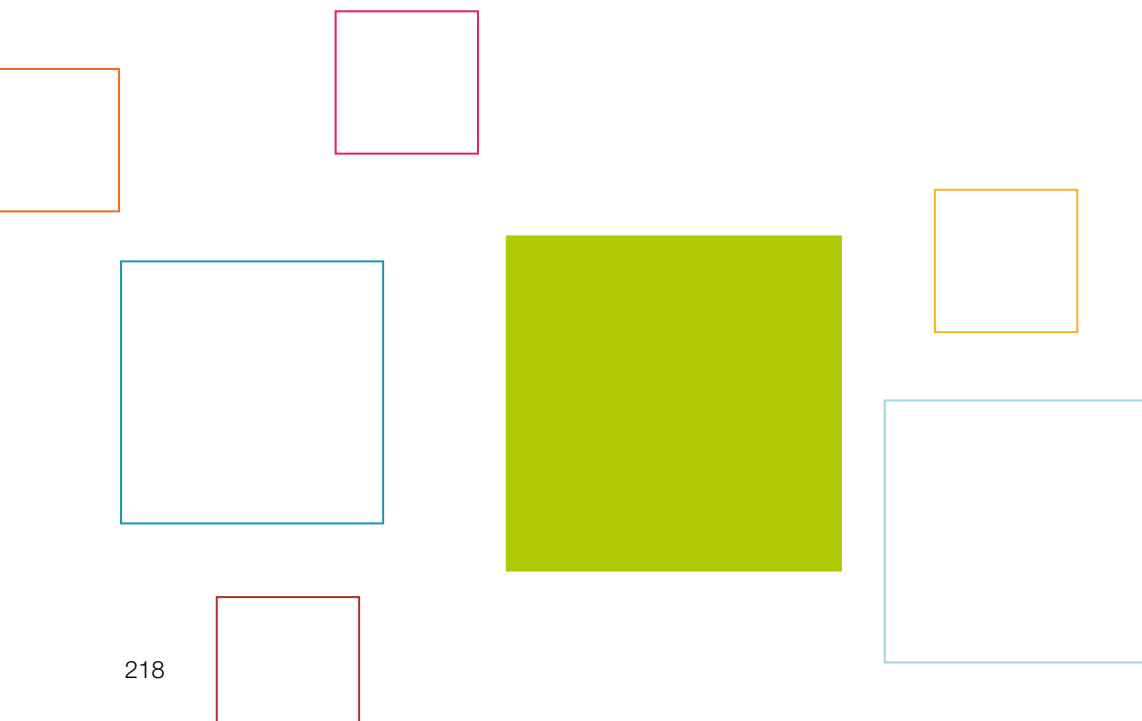


NPK



NPLK



NPTK

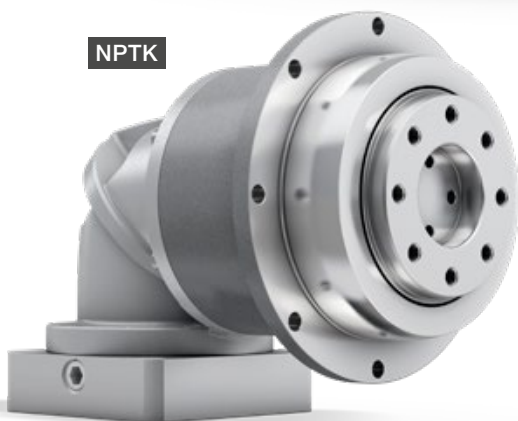

NPSK



NPRK




NPK / NPLK / NPSK / NPTK / NPRK

– Individual Talents



PRODUCT HIGHLIGHTS



High flexibility

Various output versions offer design freedom tailored to individual requirements.



High economy

The gearboxes of the alpha Value Line are very economical to purchase, unbeatably efficient in operation, and maintenance free over their entire service life.



Fast sizing

Efficient online sizing within seconds in the SIZING ASSISTANT on the basis of the application data or the motor.

Total flexibility, even in limited space. The bevel gearboxes of the alpha Value Line combine the variety of the NP series with a compact and powerful bevel gear stage. This permits maximum flexibility through the configuration of five different output versions.



NPSK – bevel gearbox with SP+ output geometry



NPLK – bevel gearbox with reinforced bearings and B14 output geometry



More information about the alpha Value Line: simply scan the QR code using your smartphone.
<https://alpha.wittenstein.de/en-en/alpha-value-line/>




- A Design**
- The elegant design underlines the dynamics of the gearbox and sets new standards on the market

- B Compactness**
- The extremely compact design of the angle section enables use in very confined installation spaces

- C Various output shapes**
- Five output variants of the NPK series available: including B5 flange mounting, output flange, etc.
 - Higher external forces possible with NPLK, NPSK, and NPRK

- D High ratio variation**
- Large number of ratios ($i=3$ to $i=100$)
 - Available in the common binary ratios

- E Flexible motor connection**
- Mounting of all common servo motors by means of a flexible and screw-fastened adapter plate
 - Large number of motor shaft diameters connectable



NPTK – bevel gearbox with TP+ output geometry



NPRK – bevel gearbox with slot holes for optimal rack and pinion mounting

NPK 005 MF 2- / 3-stage

			2-stage					3-stage									
Ratio	i		4	5	7	8	10	16	20	25	28	35	40	50	64	70	100
Max. torque ^{a) b) e)}	T_{2a}	Nm	14	17	22	21	21	18	18	22	18	22	18	22	21	22	21
		in.lb	124	150	195	186	186	159	159	195	159	195	159	195	186	195	186
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}	Nm	6.8	8.5	12	13	13	11	11	13	11	13	11	13	13	13	13
		in.lb	60	75	106	115	115	97	97	115	97	115	97	115	115	115	115
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	17	21	26	26	26	26	26	26	26	26	26	26	26	26	26
		in.lb	150	186	230	230	230	230	230	230	230	230	230	230	230	230	230
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}	rpm	3800	3800	3800	3800	3800	3800	3800	3800	3800	3800	3800	3800	3800	3800	3800
Max. input speed	n_{1Max}	rpm	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000
Mean no load running torque ^{b)} (at n_1 =3000 rpm and 20 °C gearbox temperature)	T_{012}	Nm	0.28	0.28	0.28	0.28	0.28	0.29	0.29	0.29	0.29	0.29	0.29	0.29	0.29	0.29	0.29
		in.lb	2.5	2.5	2.5	2.5	2.5	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6
Max. backlash	j_t	arcmin	≤ 15					≤ 15									
Torsional rigidity ^{b)}	C_{t21}	Nm/arcmin	0.9	0.9	0.9	0.9	0.9	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
		in.lb/arcmin	8	8	8	8	8	11	11	11	11	11	11	11	11	11	11
Max. axial force ^{c)}	F_{2AMax}	N	700					700									
		lb _f	158					158									
Max. lateral force ^{c)}	F_{2QMax}	N	800					800									
		lb _f	180					180									
Max. tilting moment	M_{2KMax}	Nm	23					23									
		in.lb	204					204									
Efficiency at full load	η	%	95					94									
Service life	L_h	h	> 20000					> 20000									
Weight (incl. standard adapter plate)	m	kg	1.1					1.3									
		lb _m	2.4					2.9									
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 68					≤ 68									
Max. permitted housing temperature		°C	+90					+90									
		°F	+194					+194									
Ambient temperature		°C	0 to +40					0 to +40									
		°F	+32 to +104					+32 to +104									
Lubrication			Lubricated for life														
Direction of rotation			In- and output same direction														
Protection class			IP 64														
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0005BA012.000-X														
Bore diameter of coupling on the application side			mm	X = 004.000 - 012.700													
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	B	11	J_1	kgcm ²	0.1	0.1	0.1	0.1	0.1	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11
				10 ⁻³ in.lb.s ²	0.09	0.09	0.09	0.09	0.09	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com
Please consider the maximal tilting moment caused by the motor M_{1KMot} – see sizing

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft

NPK 015 MF 2-stage

			2-stage					
Ratio	i		3	4	5	7	8	10
Max. torque ^{a) b) e)}	T_{2a}	Nm	33	44	55	64	56	56
		in.lb	292	389	487	566	496	496
Max. acceleration torque ^{b)} (max. 1000 cycles per hour)	T_{2B}	Nm	16	21	27	37	35	35
		in.lb	142	186	239	327	310	310
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	41	55	69	80	80	80
		in.lb	363	487	611	708	708	708
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)	n_{1N}	rpm	3300	3300	3300	3300	3300	3300
Max. input speed	n_{1Max}	rpm	5000	5000	5000	5000	5000	5000
Mean no load running torque ^{b)} (at $n_1=3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	0.54	0.54	0.54	0.54	0.54	0.54
		in.lb	4.8	4.8	4.8	4.8	4.8	4.8
Max. backlash	j_t	arcmin	≤ 15					
Torsional rigidity ^{b)}	C_{t21}	Nm/arcmin	2.4	2.4	2.4	2.4	2.4	2.4
		in.lb/arcmin	21	21	21	21	21	21
Max. axial force ^{c)}	F_{2AMax}	N	1550					
		lb _f	349					
Max. lateral force ^{c)}	F_{2QMax}	N	1700					
		lb _f	383					
Max. tilting moment	M_{2KMax}	Nm	72					
		in.lb	637					
Efficiency at full load	η	%	95					
Service life	L_h	h	> 20000					
Weight (incl. standard adapter plate)	m	kg	2.3					
		lb _m	5.1					
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 70					
Max. permitted housing temperature		°C	+90					
		°F	+194					
Ambient temperature		°C	0 to +40					
		°F	+32 to +104					
Lubrication			Lubricated for life					
Direction of rotation			In- and output same direction					
Protection class			IP 64					
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0060BA016.000-X					
Bore diameter of coupling on the application side		mm	X = 012.000 - 032.000					
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	C 14	J_1	kgcm ²	0.31	0.31	0.31	0.31	0.31
			10 ⁻³ in.lb.s ²	0.27	0.27	0.27	0.27	0.27

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com
Please consider the maximal tilting moment caused by the motor M_{1KMot} – see sizing

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange



^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft

Motor shaft diameter [mm]


2-stage

up to 14⁴⁾ (C)⁵⁾
clamping hub
diameter

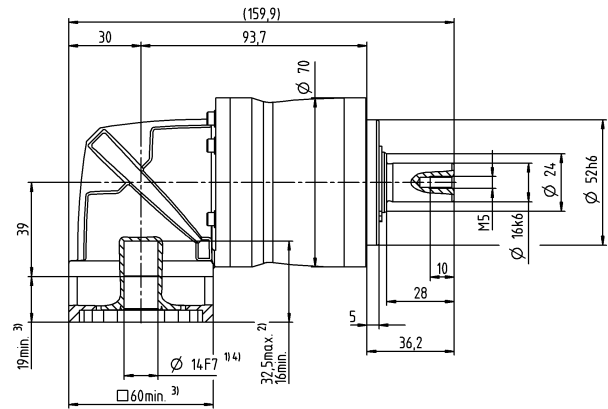

Other output variants

Shaft with key



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPK 015 MF 3-stage

			3-stage													
Ratio	i		12	15	16	20	25	28	30	32	35	40	50	64	70	100
Max. torque ^{a) b) e)}	T_{2a}	Nm	42	51	56	56	64	56	51	56	64	56	64	56	64	56
		in.lb	372	451	496	496	566	496	451	496	566	496	566	496	566	496
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}	Nm	20	25	27	34	40	35	31	35	40	35	40	35	40	35
		in.lb	177	221	239	301	354	310	274	310	354	310	354	310	354	310
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	52	65	70	80	80	80	80	80	80	80	80	80	80	80
		in.lb	460	575	620	708	708	708	708	708	708	708	708	708	708	708
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)	n_{1N}	rpm	3800	3800	3800	3800	3800	3800	3800	3800	3800	3800	3800	3800	3800	3800
Max. input speed	n_{1Max}	rpm	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000
Mean no load running torque ^{b)} (at $n_1=3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	0.31	0.31	0.31	0.31	0.31	0.31	0.31	0.31	0.31	0.31	0.31	0.31	0.31	0.31
		in.lb	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7
Max. backlash	j_t	arcmin	≤ 12													
Torsional rigidity ^{b)}	C_{t21}	Nm/arcmin	3	3	3	3	3	3	3	3	3	3	3	3	3	3
		in.lb/arcmin	27	27	27	27	27	27	27	27	27	27	27	27	27	27
Max. axial force ^{c)}	F_{2AMax}	N	1550													
		lb _f	349													
Max. lateral force ^{c)}	F_{2QMax}	N	1700													
		lb _f	383													
Max. tilting moment	M_{2KMax}	Nm	72													
		in.lb	637													
Efficiency at full load	η	%	94													
Service life	L_h	h	> 20000													
Weight (incl. standard adapter plate)	m	kg	2.3													
		lb _m	5.1													
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 68													
Max. permitted housing temperature		°C	+90													
		°F	+194													
Ambient temperature		°C	0 to +40													
		°F	+32 to +104													
Lubrication			Lubricated for life													
Direction of rotation			In- and output same direction													
Protection class			IP 64													
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0060BA016.000-X													
Bore diameter of coupling on the application side		mm	X = 012.000 - 032.000													
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	B 11	J_t	kgcm ²	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13
			10 ⁻³ in.lb.s ²	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com
Please consider the maximal tilting moment caused by the motor M_{1KMot} – see sizing

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange



^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft

Motor shaft diameter [mm]


3-stage

up to 11⁴⁾ (B)⁵⁾
clamping hub
diameter

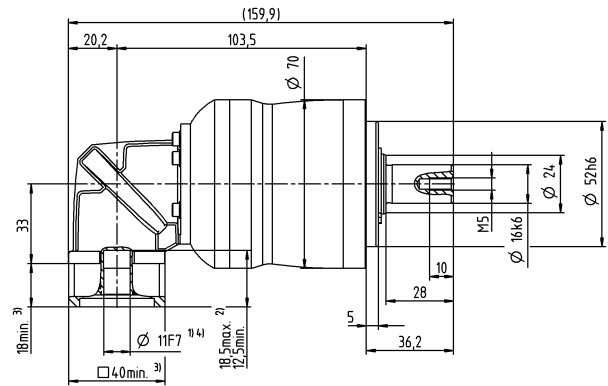

Other output variants

Shaft with key



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated

by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPK 025 MF 2-stage

			2-stage					
Ratio	i		3	4	5	7	8	10
Max. torque ^{a) b) e)}	T_{2a}	Nm	60	80	100	140	144	144
		in.lb	531	708	885	1239	1275	1275
Max. acceleration torque ^{b)} (max. 1000 cycles per hour)	T_{2B}	Nm	35	47	58	82	90	90
		in.lb	310	416	513	726	797	797
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	90	120	150	190	190	190
		in.lb	797	1062	1328	1682	1682	1682
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)	n_{1N}	rpm	3000	3000	3000	3000	3000	3000
Max. input speed	n_{1Max}	rpm	5000	5000	5000	5000	5000	5000
Mean no load running torque ^{b)} (at $n_1=3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	0.98	0.98	0.98	0.98	0.98	0.98
		in.lb	8.7	8.7	8.7	8.7	8.7	8.7
Max. backlash	j_t	arcmin	≤ 15					
Torsional rigidity ^{b)}	C_{t21}	Nm/arcmin	6.2	6.2	6.2	6.2	6.2	6.2
		in.lb/arcmin	55	55	55	55	55	55
Max. axial force ^{c)}	F_{2AMax}	N	1900					
		lb _f	428					
Max. lateral force ^{c)}	F_{2QMMax}	N	2800					
		lb _f	630					
Max. tilting moment	M_{2KMax}	Nm	137					
		in.lb	1213					
Efficiency at full load	η	%	95					
Service life	L_h	h	> 20000					
Weight (incl. standard adapter plate)	m	kg	4.9					
		lb _m	11					
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 73					
Max. permitted housing temperature		°C	+90					
		°F	+194					
Ambient temperature		°C	0 to +40					
		°F	+32 to +104					
Lubrication			Lubricated for life					
Direction of rotation			In- and output same direction					
Protection class			IP 64					
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0060BA022.000-X					
Bore diameter of coupling on the application side		mm	X = 012.000 - 032.000					
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	E 19	J_1	kgcm ²	1.2	1.2	1.2	1.2	1.2
			10 ⁻³ in.lb.s ²	1.1	1.1	1.1	1.1	1.1

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com
Please consider the maximal tilting moment caused by the motor M_{1KMot} – see sizing

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange



^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft

Motor shaft diameter [mm]


2-stage

up to 19⁴⁾ (E)⁵⁾
clamping hub
diameter

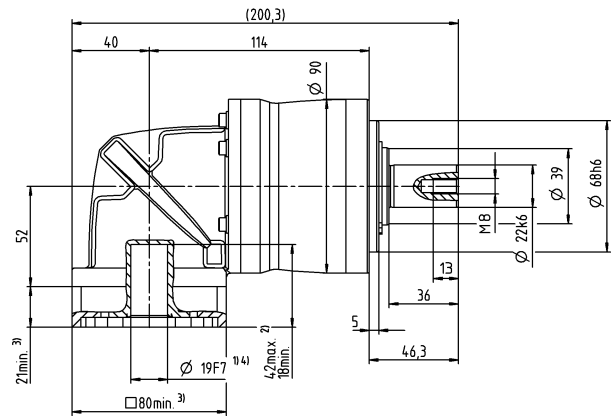

Other output variants

Shaft with key



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPK 025 MF 3-stage

				3-stage														
Ratio		i		9	12	15	16	20	25	28	30	32	35	40	50	64	70	100
Max. torque ^{a) b) e)}		T_{2a}	Nm	99	128	128	152	152	160	152	128	152	160	152	160	144	160	144
			in.lb	876	1133	1133	1345	1345	1416	1345	1133	1345	1416	1345	1416	1275	1416	1275
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)		T_{2B}	Nm	48	65	80	86	95	100	95	80	95	100	95	100	90	100	90
			in.lb	425	575	708	761	841	885	841	708	841	885	841	885	797	885	797
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)		T_{2Not}	Nm	124	166	190	190	190	190	190	190	190	190	190	190	190	190	190
			in.lb	1097	1469	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)		n_{1N}	rpm	3300	3300	3300	3300	3300	3300	3300	3300	3300	3300	3300	3300	3300	3300	3300
Max. input speed		n_{1Max}	rpm	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000
Mean no load running torque ^{b)} (at n_1 =3000 rpm and 20 °C gearbox temperature)		T_{012}	Nm	0.52	0.52	0.52	0.52	0.52	0.52	0.52	0.52	0.52	0.52	0.52	0.52	0.52	0.52	0.52
			in.lb	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6
Max. backlash		j_t	arcmin	≤ 13														
Torsional rigidity ^{b)}		C_{t21}	Nm/arcmin	8.4	8.4	8.4	8.4	8.4	8.4	8.4	8.4	8.4	8.4	8.4	8.4	8.4	8.4	8.4
			in.lb/arcmin	74	74	74	74	74	74	74	74	74	74	74	74	74	74	74
Max. axial force ^{c)}		F_{2AMax}	N	1900														
			lb _f	428														
Max. lateral force ^{c)}		F_{2QMMax}	N	2800														
			lb _f	630														
Max. tilting moment		M_{2KMax}	Nm	137														
			in.lb	1213														
Efficiency at full load		η	%	94														
Service life		L_h	h	> 20000														
Weight (incl. standard adapter plate)		m	kg	4.5														
			lb _m	9.9														
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)		L_{PA}	dB(A)	≤ 70														
Max. permitted housing temperature			°C	+90														
			°F	+194														
Ambient temperature			°C	0 to +40														
			°F	+32 to +104														
Lubrication				Lubricated for life														
Direction of rotation				In- and output same direction														
Protection class				IP 64														
Elastomer coupling (recommended product type – validate sizing with cymex®)				ELC-0060BA022.000-X														
Bore diameter of coupling on the application side			mm	X = 012.000 - 032.000														
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	C	14	J_1	kgcm ²	0.45	0.45	0.45	0.45	0.45	0.45	0.45	0.45	0.45	0.45	0.45	0.45	0.45	0.45
				10 ⁻³ in.lb.s ²	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com
Please consider the maximal tilting moment caused by the motor M_{1KMot} – see sizing

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter



^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft


3-stage

up to 14 ⁴⁾ (C) ⁵⁾
clamping hub
diameter

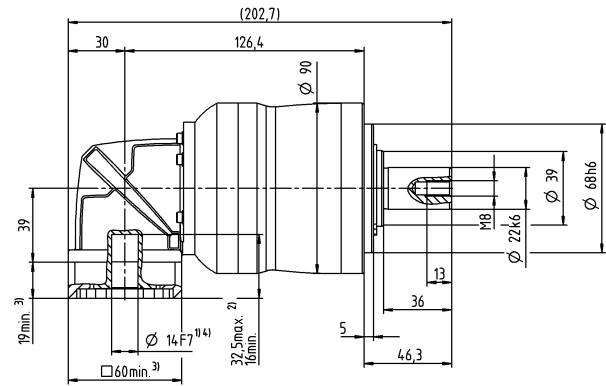

Other output variants

Shaft with key



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

4) Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPK 035 MF 2-stage

			2-stage					
Ratio	i		3	4	5	7	8	10
Max. torque ^{a) b) e)}	T_{2a}	Nm	150	200	250	350	352	352
		in.lb	1328	1770	2213	3098	3115	3115
Max. acceleration torque ^{b)} (max. 1000 cycles per hour)	T_{2B}	Nm	93	124	155	217	220	220
		in.lb	823	1097	1372	1921	1947	1947
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	238	318	397	500	500	500
		in.lb	2106	2815	3514	4425	4425	4425
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)	n_{1N}	rpm	2000	2000	2000	2000	2000	2000
Max. input speed	n_{1Max}	rpm	4500	4500	4500	4500	4500	4500
Mean no load running torque ^{b)} (at $n_1=3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	3.5	3.5	3.5	3.5	3.5	3.5
		in.lb	31	31	31	31	31	31
Max. backlash	j_t	arcmin	≤ 13					
Torsional rigidity ^{b)}	C_{t21}	Nm/arcmin	16	16	16	16	16	16
		in.lb/arcmin	142	142	142	142	142	142
Max. axial force ^{c)}	F_{2AMax}	N	4000					
		lb _f	900					
Max. lateral force ^{c)}	F_{2QMax}	N	5000					
		lb _f	1125					
Max. tilting moment	M_{2KMax}	Nm	345					
		in.lb	3054					
Efficiency at full load	η	%	95					
Service life	L_h	h	> 20000					
Weight (incl. standard adapter plate)	m	kg	11					
		lb _m	24					
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 74					
Max. permitted housing temperature		°C	+90					
		°F	+194					
Ambient temperature		°C	0 to +40					
		°F	+32 to +104					
Lubrication			Lubricated for life					
Direction of rotation			In- and output same direction					
Protection class			IP 64					
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0150BA032.000-X					
Bore diameter of coupling on the application side		mm	X = 019.000 - 036.000					
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	H 28	J_1	kgcm ²	5.3	5.3	5.3	5.3	5.3
			10 ⁻³ in.lb.s ²	4.7	4.7	4.7	4.7	4.7

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com
Please consider the maximal tilting moment caused by the motor M_{1KMot} – see sizing

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange



^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft

Motor shaft diameter [mm]


2-stage

up to 28⁴⁾ (H)⁵⁾
clamping hub
diameter

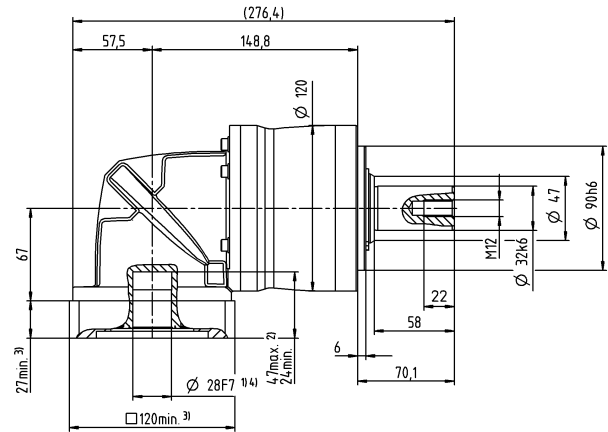

Other output variants

Shaft with key



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPK 035 MF 3-stage

				3-stage														
Ratio		i		9	12	15	16	20	25	28	30	32	35	40	50	64	70	100
Max. torque ^{a) b) e)}		T_{2a}	Nm	180	240	300	320	400	400	408	320	408	400	408	400	352	400	352
			in.lb	1593	2124	2655	2832	3540	3540	3611	2832	3611	3540	3611	3540	3115	3540	3115
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)		T_{2B}	Nm	105	141	176	188	235	250	255	200	255	250	255	250	220	250	220
			in.lb	929	1248	1558	1664	2080	2213	2257	1770	2257	2213	2257	2213	1947	2213	1947
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)		T_{2Not}	Nm	270	361	451	481	500	500	500	500	500	500	500	500	500	500	500
			in.lb	2390	3195	3992	4257	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)		n_{1N}	rpm	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000
Max. input speed		n_{1Max}	rpm	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000
Mean no load running torque ^{b)} (at n_1 = 3000 rpm and 20 °C gearbox temperature)		T_{012}	Nm	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
			in.lb	8.9	8.9	8.9	8.9	8.9	8.9	8.9	8.9	8.9	8.9	8.9	8.9	8.9	8.9	8.9
Max. backlash		j_t	arcmin	≤ 13														
Torsional rigidity ^{b)}		C_{t21}	Nm/arcmin	19	19	19	19	19	19	19	19	19	19	19	19	19	19	19
			in.lb/arcmin	168	168	168	168	168	168	168	168	168	168	168	168	168	168	168
Max. axial force ^{c)}		F_{2AMax}	N	4000														
			lb _f	900														
Max. lateral force ^{c)}		F_{2QMMax}	N	5000														
			lb _f	1125														
Max. tilting moment		M_{2KMMax}	Nm	345														
			in.lb	3054														
Efficiency at full load		η	%	94														
Service life		L_h	h	> 20000														
Weight (incl. standard adapter plate)		m	kg	11														
			lb _m	24														
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)		L_{PA}	dB(A)	≤ 73														
Max. permitted housing temperature			°C	+90														
			°F	+194														
Ambient temperature			°C	0 to +40														
			°F	+32 to +104														
Lubrication				Lubricated for life														
Direction of rotation				In- and output same direction														
Protection class				IP 64														
Elastomer coupling (recommended product type – validate sizing with cymex®)				ELC-0150BA032.000-X														
Bore diameter of coupling on the application side			mm	X = 019.000 - 036.000														
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	E	19	J_1	kgcm ²	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7
				10 ⁻³ in.lb.s ²	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com
Please consider the maximal tilting moment caused by the motor M_{1KMot} – see sizing

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange



^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft

Motor shaft diameter [mm]


3-stage

up to 19⁴⁾ (E)⁵⁾
clamping hub
diameter

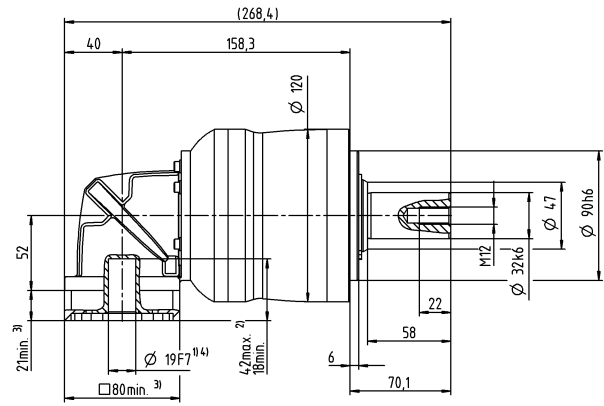

Other output variants

Shaft with key



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated

by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPK 045 MF 2- / 3-stage

				2-stage			3-stage					
Ratio	i			5	8	10	25	32	50	64	100	
Max. torque ^{a) b) e)}	T_{2a}		Nm	500	640	640	700	640	700	640	640	
			in.lb	4425	5665	5665	6196	5665	6196	5665	5665	
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}		Nm	399	400	400	500	400	500	400	400	
			in.lb	3531	3540	3540	4425	3540	4425	3540	3540	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}		Nm	1000	1000	1000	1000	1000	1000	1000	1000	
			in.lb	8851	8851	8851	8851	8851	8851	8851	8851	
Permitted average input speed ^{d)} (at T_{2n} and 20 °C ambient temperature)	n_{1N}		rpm	1600	1600	1600	2000	2000	2000	2000	2000	
Max. input speed	n_{1Max}		rpm	4000	4000	4000	4500	4500	4500	4500	4500	
Mean no load running torque ^{b)} (at n_1 =3000 rpm and 20 °C gearbox temperature)	T_{012}		Nm	6.9	6.9	6.9	3.6	3.6	3.6	3.6	3.6	
			in.lb	61	61	61	32	32	32	32	32	
Max. backlash	j_l		arcmin	≤ 11			≤ 11					
Torsional rigidity ^{b)}	C_{t21}		Nm/arcmin	48	48	48	54	54	54	54	54	
			in.lb/arcmin	425	425	425	478	478	478	478	478	
Max. axial force ^{c)}	F_{2AMax}		N	6000			6000					
			lb _f	1350			1350					
Max. lateral force ^{c)}	F_{2QMax}		N	8000			8000					
			lb _f	1800			1800					
Max. tilting moment	M_{2KMax}		Nm	704			704					
			in.lb	6231			6231					
Efficiency at full load	η		%	95			94					
Service life	L_h		h	> 20000			> 20000					
Weight (incl. standard adapter plate)	m		kg	24			21					
			lb _m	53			46					
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}		dB(A)	≤ 78			≤ 74					
Max. permitted housing temperature			°C	+90			+90					
			°F	+194			+194					
Ambient temperature			°C	0 to +40			0 to +40					
			°F	+32 to +104			+32 to +104					
Lubrication				Lubricated for life								
Direction of rotation				In- and output same direction								
Protection class				IP 64								
Elastomer coupling (recommended product type – validate sizing with cymex®)				ELC-0300BA040.000-X								
Bore diameter of coupling on the application side				X = 020.000 - 045.000								
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	H	28	J_1	kgcm ²	–	–	–	6.8	6.8	6.8	6.8	6.8
				10 ⁻³ in.lb.s ²	–	–	–	6	6	6	6	6
	K	38	J_1	kgcm ²	18	18	18	–	–	–	–	–
				10 ⁻³ in.lb.s ²	16	16	16	–	–	–	–	–

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com
Please consider the maximal tilting moment caused by the motor M_{1KMot} – see sizing

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter



^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft



2-stage

up to 38⁴⁾ (K)⁵⁾
clamping hub
diameter

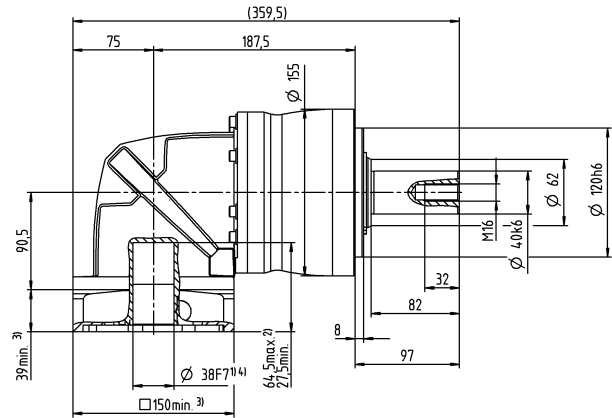

3-stage


up to 28⁴⁾ (H)⁵⁾
clamping hub
diameter

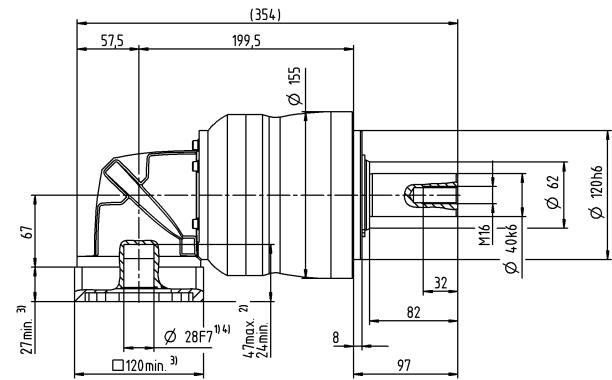

Motor shaft diameter [mm]

Other output variants

Shaft with key



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated

by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPLK 015 MF 2-stage

			2-stage					
Ratio	i		3	4	5	7	8	10
Max. torque ^{a) b) e)}	T_{2a}	Nm	33	44	55	64	56	56
		in.lb	292	389	487	566	496	496
Max. acceleration torque ^{b)} (max. 1000 cycles per hour)	T_{2B}	Nm	16	21	27	37	35	35
		in.lb	142	186	239	327	310	310
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	41	55	69	80	80	80
		in.lb	363	487	611	708	708	708
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)	n_{1N}	rpm	2900	3100	3300	3300	3300	3300
Max. input speed	n_{1Max}	rpm	5000	5000	5000	5000	5000	5000
Mean no load running torque ^{b)} (at $n_1=3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	1.2	1.2	1.2	1.2	1.2	1.2
		in.lb	11	11	11	11	11	11
Max. backlash	j_t	arcmin	≤ 15					
Torsional rigidity ^{b)}	C_{t21}	Nm/arcmin	2.4	2.4	2.4	2.4	2.4	2.4
		in.lb/arcmin	21	21	21	21	21	21
Max. axial force ^{c)}	F_{2AMax}	N	2400					
		lb _f	540					
Max. lateral force ^{c)}	F_{2QMax}	N	2800					
		lb _f	630					
Max. tilting moment	M_{2KMax}	Nm	152					
		in.lb	1345					
Efficiency at full load	η	%	95					
Service life	L_h	h	> 20000					
Weight (incl. standard adapter plate)	m	kg	2.3					
		lb _m	5.1					
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 70					
Max. permitted housing temperature		°C	+90					
		°F	+194					
Ambient temperature		°C	0 to +40					
		°F	+32 to +104					
Lubrication			Lubricated for life					
Direction of rotation			In- and output same direction					
Protection class			IP 64					
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0060BA016.000-X					
Bore diameter of coupling on the application side		mm	X = 012.000 - 032.000					
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	C 14	J_1	kgcm ²	0.32	0.32	0.32	0.32	0.32
			10 ⁻³ in.lb.s ²	0.28	0.28	0.28	0.28	0.28

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com
Please consider the maximal tilting moment caused by the motor M_{1KMot} – see sizing

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange



^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft

Motor shaft diameter [mm]


2-stage

up to 14⁴⁾ (C)⁵⁾
clamping hub
diameter

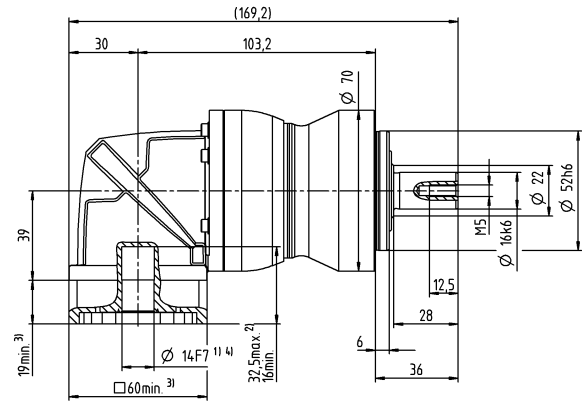


Other output variants

Shaft with key



Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPLK 015 MF 3-stage

			3-stage													
Ratio	i		12	15	16	20	25	28	30	32	35	40	50	64	70	100
Max. torque ^{a) b) e)}	T_{2a}	Nm	42	51	56	56	64	56	51	56	64	56	64	56	64	56
		in.lb	372	451	496	496	566	496	451	496	566	496	566	496	566	496
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}	Nm	20	25	27	34	40	35	31	35	40	35	40	35	40	35
		in.lb	177	221	239	301	354	310	274	310	354	310	354	310	354	310
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	52	65	70	80	80	80	80	80	80	80	80	80	80	80
		in.lb	460	575	620	708	708	708	708	708	708	708	708	708	708	708
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)	n_{1N}	rpm	3800	3800	3800	3800	3800	3800	3800	3800	3800	3800	3800	3800	3800	3800
Max. input speed	n_{1Max}	rpm	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000
Mean no load running torque ^{b)} (at $n_1=3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	0.52	0.52	0.52	0.52	0.52	0.52	0.52	0.52	0.52	0.52	0.52	0.52	0.52	0.52
		in.lb	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6
Max. backlash	j_t	arcmin	≤ 12													
Torsional rigidity ^{b)}	C_{t21}	Nm/arcmin	3	3	3	3	3	3	3	3	3	3	3	3	3	3
		in.lb/arcmin	27	27	27	27	27	27	27	27	27	27	27	27	27	27
Max. axial force ^{c)}	F_{2AMax}	N	2400													
		lb _f	540													
Max. lateral force ^{c)}	F_{2QMMax}	N	2800													
		lb _f	630													
Max. tilting moment	M_{2KMax}	Nm	152													
		in.lb	1345													
Efficiency at full load	η	%	94													
Service life	L_h	h	> 20000													
Weight (incl. standard adapter plate)	m	kg	2.4													
		lb _m	5.3													
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 68													
Max. permitted housing temperature		°C	+90													
		°F	+194													
Ambient temperature		°C	0 to +40													
		°F	+32 to +104													
Lubrication			Lubricated for life													
Direction of rotation			In- and output same direction													
Protection class			IP 64													
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0060BA016.000-X													
Bore diameter of coupling on the application side		mm	X = 012.000 - 032.000													
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	B 11	J_t	kgcm ²	0.14	0.14	0.14	0.14	0.14	0.14	0.14	0.14	0.14	0.14	0.14	0.14	0.14
			10 ⁻³ in.lb.s ²	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com
Please consider the maximal tilting moment caused by the motor M_{1KMot} – see sizing

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter



^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft


3-stage

up to 11⁴⁾ (B)⁵⁾
clamping hub
diameter

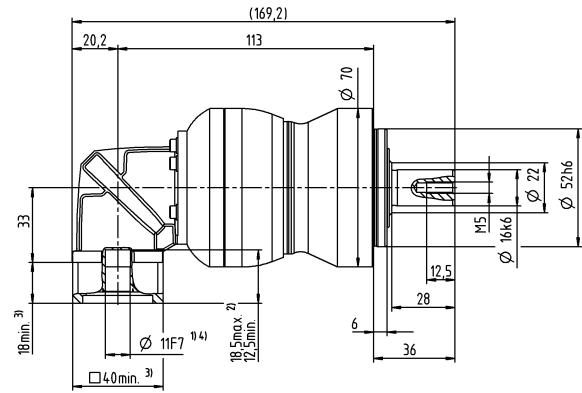


Other output variants

Shaft with key



Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

4) Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPLK 025 MF 2-stage

			2-stage					
Ratio	i		3	4	5	7	8	10
Max. torque ^{a) b) e)}	T_{2a}	Nm	60	80	100	140	144	144
		in.lb	531	708	885	1239	1275	1275
Max. acceleration torque ^{b)} (max. 1000 cycles per hour)	T_{2B}	Nm	35	47	58	82	90	90
		in.lb	310	416	513	726	797	797
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	90	120	150	190	190	190
		in.lb	797	1062	1328	1682	1682	1682
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)	n_{1N}	rpm	2700	2900	3000	3000	3000	3000
Max. input speed	n_{1Max}	rpm	5000	5000	5000	5000	5000	5000
Mean no load running torque ^{b)} (at $n_1=3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	2.4	2.4	2.4	2.4	2.4	2.4
		in.lb	21	21	21	21	21	21
Max. backlash	j_t	arcmin	≤ 15					
Torsional rigidity ^{b)}	C_{t21}	Nm/arcmin	6.2	6.2	6.2	6.2	6.2	6.2
		in.lb/arcmin	55	55	55	55	55	55
Max. axial force ^{c)}	F_{2AMax}	N	3350					
		lb _f	754					
Max. lateral force ^{c)}	F_{2QMMax}	N	4200					
		lb _f	945					
Max. tilting moment	M_{2KMax}	Nm	236					
		in.lb	2089					
Efficiency at full load	η	%	95					
Service life	L_h	h	> 20000					
Weight (incl. standard adapter plate)	m	kg	5					
		lb _m	11					
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 73					
Max. permitted housing temperature		°C	+90					
		°F	+194					
Ambient temperature		°C	0 to +40					
		°F	+32 to +104					
Lubrication			Lubricated for life					
Direction of rotation			In- and output same direction					
Protection class			IP 64					
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0060BA022.000-X					
Bore diameter of coupling on the application side		mm	X = 012.000 - 032.000					
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	E 19	J_1	kgcm ²	1.2	1.2	1.2	1.2	1.2
			10 ⁻³ in.lb.s ²	1.1	1.1	1.1	1.1	1.1

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com
Please consider the maximal tilting moment caused by the motor M_{1KMot} – see sizing

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange



^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft

Motor shaft diameter [mm]


2-stage

up to 19⁴⁾ (E)⁵⁾
clamping hub
diameter

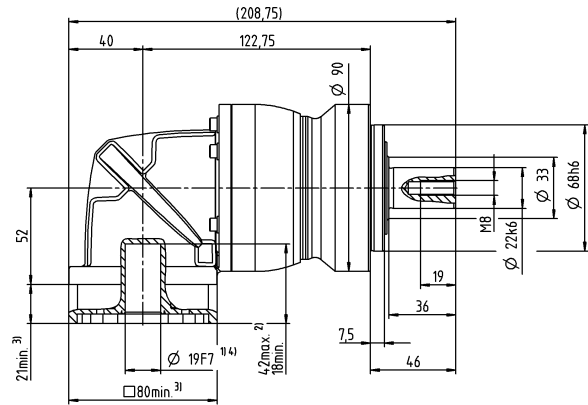


Other output variants

Shaft with key



Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPLK 025 MF 3-stage

				3-stage														
Ratio		i		9	12	15	16	20	25	28	30	32	35	40	50	64	70	100
Max. torque ^{a) b) e)}		T _{2a}	Nm	99	128	128	152	152	160	152	128	152	160	152	160	144	160	144
			in.lb	876	1133	1133	1345	1345	1416	1345	1133	1345	1416	1345	1416	1275	1416	1275
Max. acceleration torque ^{a)} (max. 1000 cycles per hour)		T _{2B}	Nm	48	65	80	86	95	100	95	80	95	100	95	100	90	100	90
			in.lb	425	575	708	761	841	885	841	708	841	885	841	885	797	885	797
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)		T _{2Not}	Nm	124	166	190	190	190	190	190	190	190	190	190	190	190	190	190
			in.lb	1097	1469	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682
Permitted average input speed ^{d)} (at T _{2a} and 20 °C ambient temperature)		n _{1N}	rpm	2900	3300	3300	3300	3300	3300	3300	3300	3300	3300	3300	3300	3300	3300	3300
Max. input speed		n _{1Max}	rpm	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000
Mean no load running torque ^{b)} (at n ₁ =3000 rpm and 20 °C gearbox temperature)		T ₀₁₂	Nm	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97
			in.lb	8.6	8.6	8.6	8.6	8.6	8.6	8.6	8.6	8.6	8.6	8.6	8.6	8.6	8.6	8.6
Max. backlash		j _t	arcmin	≤ 13														
Torsional rigidity ^{b)}		C _{t21}	Nm/arcmin	8.4	8.4	8.4	8.4	8.4	8.4	8.4	8.4	8.4	8.4	8.4	8.4	8.4	8.4	8.4
			in.lb/arcmin	74	74	74	74	74	74	74	74	74	74	74	74	74	74	74
Max. axial force ^{c)}		F _{2AMax}	N	3350														
			lb _f	754														
Max. lateral force ^{c)}		F _{2QMMax}	N	4200														
			lb _f	945														
Max. tilting moment		M _{2KMax}	Nm	236														
			in.lb	2089														
Efficiency at full load		η	%	94														
Service life		L _h	h	> 20000														
Weight (incl. standard adapter plate)		m	kg	4.6														
			lb _m	10														
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)		L _{PA}	dB(A)	≤ 73														
Max. permitted housing temperature			°C	+90														
			°F	+194														
Ambient temperature			°C	0 to +40														
			°F	+32 to +104														
Lubrication				Lubricated for life														
Direction of rotation				In- and output same direction														
Protection class				IP 64														
Elastomer coupling (recommended product type – validate sizing with cymex®)				ELC-0060BA022.000-X														
Bore diameter of coupling on the application side			mm	X = 012.000 - 032.000														
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	C	14	J ₁	kgcm ²	0.45	0.45	0.45	0.45	0.45	0.45	0.45	0.45	0.45	0.45	0.45	0.45	0.45	0.45
				10 ⁻³ in.lb.s ²	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com
Please consider the maximal tilting moment caused by the motor M_{1KMot} – see sizing

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange



^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft

Motor shaft diameter [mm]


3-stage

up to 14 ⁴⁾ (C) ⁵⁾
clamping hub
diameter

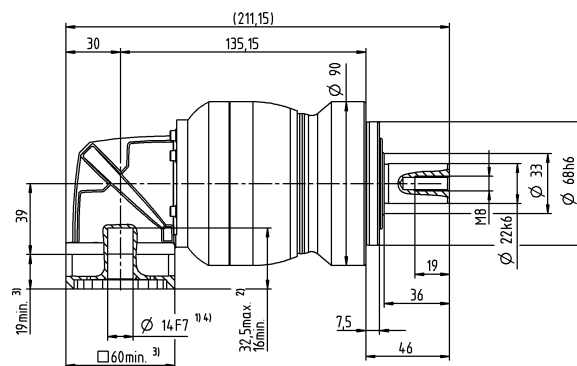


Other output variants

Shaft with key



Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPLK 035 MF 2-stage

			2-stage					
Ratio	i		3	4	5	7	8	10
Max. torque ^{a) b) e)}	T_{2a}	Nm	150	200	250	350	352	352
		in.lb	1328	1770	2213	3098	3115	3115
Max. acceleration torque ^{b)} (max. 1000 cycles per hour)	T_{2B}	Nm	93	124	155	217	220	220
		in.lb	823	1097	1372	1921	1947	1947
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	238	318	397	500	500	500
		in.lb	2106	2815	3514	4425	4425	4425
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)	n_{1N}	rpm	2000	2000	2000	2000	2000	2000
Max. input speed	n_{1Max}	rpm	4500	4500	4500	4500	4500	4500
Mean no load running torque ^{b)} (at $n_1=3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	5.8	5.8	5.8	5.8	5.8	5.8
		in.lb	51	51	51	51	51	51
Max. backlash	j_t	arcmin	≤ 13					
Torsional rigidity ^{b)}	C_{t21}	Nm/arcmin	16	16	16	16	16	16
		in.lb/arcmin	142	142	142	142	142	142
Max. axial force ^{c)}	F_{2AMax}	N	5650					
		lb _f	1271					
Max. lateral force ^{c)}	F_{2QMax}	N	6600					
		lb _f	1485					
Max. tilting moment	M_{2KMax}	Nm	487					
		in.lb	4310					
Efficiency at full load	η	%	95					
Service life	L_h	h	> 20000					
Weight (incl. standard adapter plate)	m	kg	11					
		lb _m	24					
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 74					
Max. permitted housing temperature		°C	+90					
		°F	+194					
Ambient temperature		°C	0 to +40					
		°F	+32 to +104					
Lubrication			Lubricated for life					
Direction of rotation			In- and output same direction					
Protection class			IP 64					
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0150BA032.000-X					
Bore diameter of coupling on the application side		mm	X = 019.000 - 036.000					
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	H 28	J_1	kgcm ²	5.2	5.2	5.2	5.2	5.2
			10 ⁻³ in.lb.s ²	4.6	4.6	4.6	4.6	4.6

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com
Please consider the maximal tilting moment caused by the motor M_{1KMot} – see sizing

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange



^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft

Motor shaft diameter [mm]


2-stage

up to 28⁴⁾ (H)⁵⁾
clamping hub
diameter

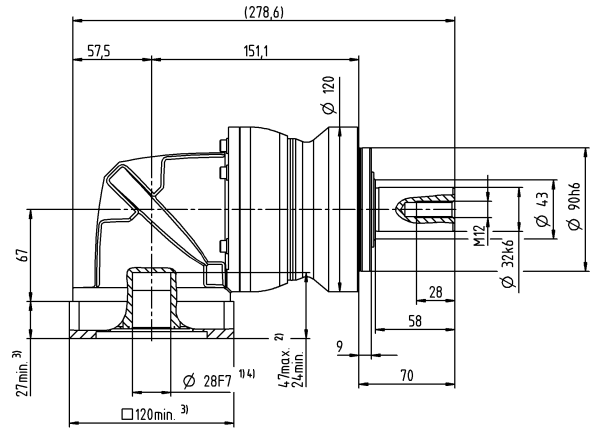


Other output variants

Shaft with key



Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPLK 035 MF 3-stage

				3-stage														
Ratio		i		9	12	15	16	20	25	28	30	32	35	40	50	64	70	100
Max. torque ^{a) b) e)}		T_{2a}	Nm	180	240	300	320	400	400	408	320	408	400	408	400	352	400	352
			in.lb	1593	2124	2655	2832	3540	3540	3611	2832	3611	3540	3611	3540	3115	3540	3115
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)		T_{2B}	Nm	105	141	176	188	235	250	255	200	255	250	255	250	220	250	220
			in.lb	929	1248	1558	1664	2080	2213	2257	1770	2257	2213	2257	2213	1947	2213	1947
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)		T_{2Not}	Nm	270	361	451	481	500	500	500	500	500	500	500	500	500	500	500
			in.lb	2390	3195	3992	4257	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)		n_{1N}	rpm	2700	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000
Max. input speed		n_{1Max}	rpm	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000
Mean no load running torque ^{b)} (at n_1 =3000 rpm and 20 °C gearbox temperature)		T_{012}	Nm	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.3
			in.lb	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20
Max. backlash		j_t	arcmin	≤ 13														
Torsional rigidity ^{b)}		C_{t21}	Nm/arcmin	19	19	19	19	19	19	19	19	19	19	19	19	19	19	19
			in.lb/arcmin	168	168	168	168	168	168	168	168	168	168	168	168	168	168	168
Max. axial force ^{c)}		F_{2AMax}	N	5650														
			lb _f	1271														
Max. lateral force ^{c)}		F_{2QMMax}	N	6600														
			lb _f	1485														
Max. tilting moment		M_{2KMMax}	Nm	487														
			in.lb	4310														
Efficiency at full load		η	%	94														
Service life		L_h	h	> 20000														
Weight (incl. standard adapter plate)		m	kg	11														
			lb _m	24														
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)		L_{PA}	dB(A)	≤ 73														
Max. permitted housing temperature			°C	+90														
			°F	+194														
Ambient temperature			°C	0 to +40														
			°F	+32 to +104														
Lubrication				Lubricated for life														
Direction of rotation				In- and output same direction														
Protection class				IP 64														
Elastomer coupling (recommended product type – validate sizing with cymex®)				ELC-0150BA032.000-X														
Bore diameter of coupling on the application side			mm	X = 019.000 - 036.000														
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	E	19	J_1	kgcm ²	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7
				10 ⁻³ in.lb.s ²	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com
Please consider the maximal tilting moment caused by the motor M_{1KMot} – see sizing

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange



^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft

Motor shaft diameter [mm]


3-stage

up to 19 ⁴⁾ (E) ⁵⁾
clamping hub
diameter

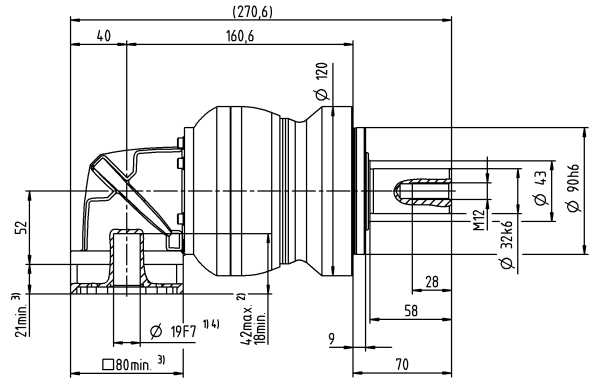


Other output variants

Shaft with key



Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

4) Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPLK 045 MF 2- / 3-stage

				2-stage			3-stage						
Ratio		i			5	8	10	25	32	50	64	100	
Max. torque ^{a) b) e)}		T_{2a}		Nm	500	640	640	700	640	700	640	640	
				in.lb	4425	5665	5665	6196	5665	6196	5665	5665	
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)		T_{2B}		Nm	399	400	400	500	400	500	400	400	
				in.lb	3531	3540	3540	4425	3540	4425	3540	3540	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)		T_{2Not}		Nm	1000	1000	1000	1000	1000	1000	1000	1000	
				in.lb	8851	8851	8851	8851	8851	8851	8851	8851	
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)		n_{1N}		rpm	1600	1600	1600	2000	2000	2000	2000	2000	
Max. input speed		n_{1Max}		rpm	4000	4000	4000	4500	4500	4500	4500	4500	
Mean no load running torque ^{b)} (at n_1 =3000 rpm and 20 °C gearbox temperature)		T_{012}		Nm	8.7	8.7	8.7	4.7	4.7	4.7	4.7	4.7	
				in.lb	77	77	77	42	42	42	42	42	
Max. backlash		j_l		arcmin	≤ 11			≤ 11					
Torsional rigidity ^{b)}		C_{t21}		Nm/arcmin	48	48	48	54	54	54	54	54	
				in.lb/arcmin	425	425	425	478	478	478	478	478	
Max. axial force ^{c)}		F_{2AMax}		N	9870			9870					
				lb _f	2221			2221					
Max. lateral force ^{c)}		F_{2QMax}		N	9900			9900					
				lb _f	2228			2228					
Max. tilting moment		M_{2KMax}		Nm	952			952					
				in.lb	8426			8426					
Efficiency at full load		η		%	95			94					
Service life		L_h		h	> 20000			> 20000					
Weight (incl. standard adapter plate)		m		kg	24			22					
				lb _m	53			49					
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)		L_{PA}		dB(A)	≤ 78			≤ 74					
Max. permitted housing temperature				°C	+90			+90					
				°F	+194			+194					
Ambient temperature				°C	0 to +40			0 to +40					
				°F	+32 to +104			+32 to +104					
Lubrication					Lubricated for life								
Direction of rotation					In- and output same direction								
Protection class					IP 64								
Elastomer coupling (recommended product type – validate sizing with cymex®)					ELC-0300BA040.000-X								
Bore diameter of coupling on the application side				mm	X = 020.000 - 045.000								
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]		H	28	J_1	kgcm ²	–	–	–	6.7	6.7	6.7	6.7	6.7
					10 ⁻³ in.lb.s ²	–	–	–	5.9	5.9	5.9	5.9	5.9
		K	38	J_1	kgcm ²	18	18	18	–	–	–	–	–
					10 ⁻³ in.lb.s ²	16	16	16	–	–	–	–	–

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com
Please consider the maximal tilting moment caused by the motor M_{1KMot} – see sizing

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter



^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft



2-stage

up to 38⁴⁾ (K)⁵⁾
clamping hub
diameter

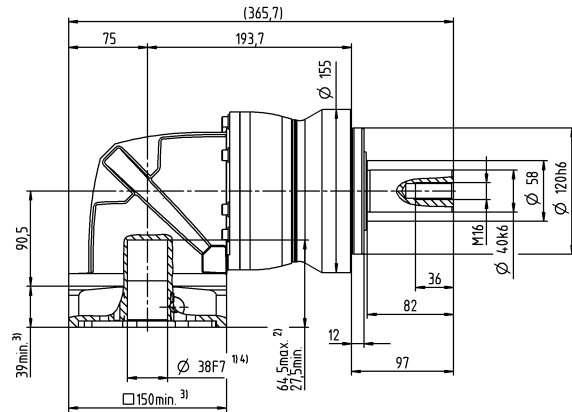

3-stage


up to 28⁴⁾ (H)⁵⁾
clamping hub
diameter

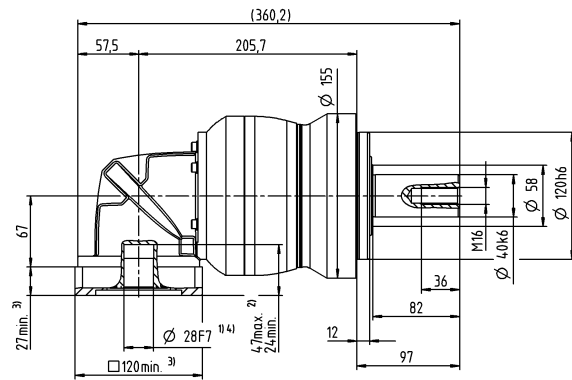


Motor shaft diameter [mm]

Other output variants

Shaft with key



Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated

by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPSK 015 MF 2-stage

			2-stage					
Ratio	i		3	4	5	7	8	10
Max. torque ^{a) b) e)}	T_{2a}	Nm	33	44	55	64	56	56
		in.lb	292	389	487	566	496	496
Max. acceleration torque ^{b)} (max. 1000 cycles per hour)	T_{2B}	Nm	16	21	27	37	35	35
		in.lb	142	186	239	327	310	310
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	41	55	69	80	80	80
		in.lb	363	487	611	708	708	708
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)	n_{1N}	rpm	2900	3100	3300	3300	3300	3300
Max. input speed	n_{1Max}	rpm	5000	5000	5000	5000	5000	5000
Mean no load running torque ^{b)} (at $n_1=3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	1.2	1.2	1.2	1.2	1.2	1.2
		in.lb	11	11	11	11	11	11
Max. backlash	j_t	arcmin	≤ 15					
Torsional rigidity ^{b)}	C_{t21}	Nm/arcmin	2.4	2.4	2.4	2.4	2.4	2.4
		in.lb/arcmin	21	21	21	21	21	21
Max. axial force ^{c)}	F_{2AMax}	N	2400					
		lb _f	540					
Max. lateral force ^{c)}	F_{2QMMax}	N	2800					
		lb _f	630					
Max. tilting moment	M_{2KMax}	Nm	152					
		in.lb	1345					
Efficiency at full load	η	%	95					
Service life	L_h	h	> 20000					
Weight (incl. standard adapter plate)	m	kg	2.2					
		lb _m	4.9					
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 70					
Max. permitted housing temperature		°C	+90					
		°F	+194					
Ambient temperature		°C	0 to +40					
		°F	+32 to +104					
Lubrication			Lubricated for life					
Direction of rotation			In- and output same direction					
Protection class			IP 64					
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0060BA016.000-X					
Bore diameter of coupling on the application side		mm	X = 012.000 - 032.000					
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	C 14	J_1	kgcm ²	0.32	0.32	0.32	0.32	0.32
			10 ⁻³ in.lb.s ²	0.28	0.28	0.28	0.28	0.28

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com
Please consider the maximal tilting moment caused by the motor M_{1KMot} – see sizing

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange



^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft

Motor shaft diameter [mm]


2-stage

up to 14 ⁴⁾ (C) ⁵⁾
clamping hub
diameter

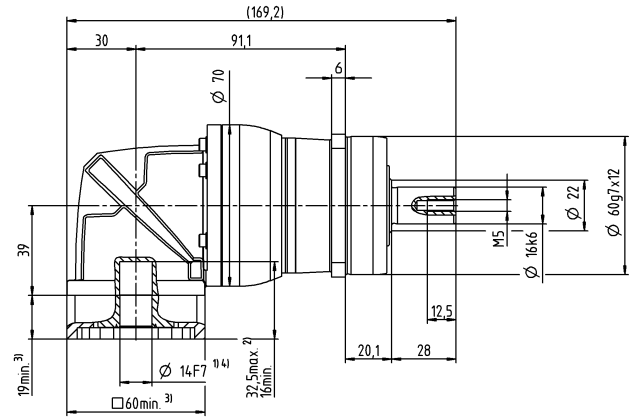


Other output variants

Shaft with key



Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

4) Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPSK 015 MF 3-stage

			3-stage													
Ratio	i		12	15	16	20	25	28	30	32	35	40	50	64	70	100
Max. torque ^{a) b) e)}	T_{2a}	Nm	42	51	56	56	64	56	51	56	64	56	64	56	64	56
		in.lb	372	451	496	496	566	496	451	496	566	496	566	496	566	496
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}	Nm	20	25	27	34	40	35	31	35	40	35	40	35	40	35
		in.lb	177	221	239	301	354	310	274	310	354	310	354	310	354	310
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	52	65	70	80	80	80	80	80	80	80	80	80	80	80
		in.lb	460	575	620	708	708	708	708	708	708	708	708	708	708	708
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)	n_{1N}	rpm	3800	3800	3800	3800	3800	3800	3800	3800	3800	3800	3800	3800	3800	3800
Max. input speed	n_{1Max}	rpm	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000
Mean no load running torque ^{b)} (at $n_1=3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	0.52	0.52	0.52	0.52	0.52	0.52	0.52	0.52	0.52	0.52	0.52	0.52	0.52	0.52
		in.lb	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6
Max. backlash	j_t	arcmin	≤ 12													
Torsional rigidity ^{b)}	C_{t21}	Nm/arcmin	3	3	3	3	3	3	3	3	3	3	3	3	3	3
		in.lb/arcmin	27	27	27	27	27	27	27	27	27	27	27	27	27	27
Max. axial force ^{c)}	F_{2AMax}	N	2400													
		lb _f	540													
Max. lateral force ^{c)}	F_{2QMMax}	N	2800													
		lb _f	630													
Max. tilting moment	M_{2KMax}	Nm	152													
		in.lb	1345													
Efficiency at full load	η	%	94													
Service life	L_h	h	> 20000													
Weight (incl. standard adapter plate)	m	kg	2.3													
		lb _m	5.1													
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 68													
Max. permitted housing temperature		°C	+90													
		°F	+194													
Ambient temperature		°C	0 to +40													
		°F	+32 to +104													
Lubrication			Lubricated for life													
Direction of rotation			In- and output same direction													
Protection class			IP 64													
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0060BA016.000-X													
Bore diameter of coupling on the application side		mm	X = 012.000 - 032.000													
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	B 11	J_t	kgcm ²	0.14	0.14	0.14	0.14	0.14	0.14	0.14	0.14	0.14	0.14	0.14	0.14	0.14
			10 ⁻³ in.lb.s ²	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com
Please consider the maximal tilting moment caused by the motor M_{1KMot} – see sizing

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange



^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft

Motor shaft diameter [mm]


3-stage

up to 11⁴⁾ (B)⁵⁾
clamping hub
diameter

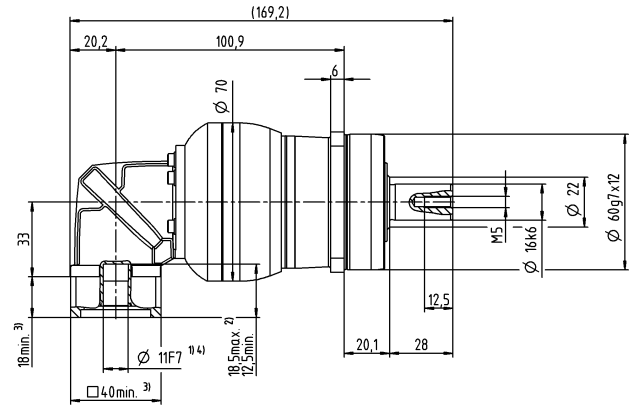


Other output variants

Shaft with key



Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPSK 025 MF 2-stage

			2-stage					
Ratio	i		3	4	5	7	8	10
Max. torque ^{a) b) e)}	T_{2a}	Nm	60	80	100	140	144	144
		in.lb	531	708	885	1239	1275	1275
Max. acceleration torque ^{b)} (max. 1000 cycles per hour)	T_{2B}	Nm	35	47	58	82	90	90
		in.lb	310	416	513	726	797	797
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	90	120	150	190	190	190
		in.lb	797	1062	1328	1682	1682	1682
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)	n_{1N}	rpm	2700	2900	3000	3000	3000	3000
Max. input speed	n_{1Max}	rpm	5000	5000	5000	5000	5000	5000
Mean no load running torque ^{b)} (at $n_1=3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	2.4	2.4	2.4	2.4	2.4	2.4
		in.lb	21	21	21	21	21	21
Max. backlash	j_t	arcmin	≤ 15					
Torsional rigidity ^{b)}	C_{t21}	Nm/arcmin	6.2	6.2	6.2	6.2	6.2	6.2
		in.lb/arcmin	55	55	55	55	55	55
Max. axial force ^{c)}	F_{2AMax}	N	3350					
		lb _f	754					
Max. lateral force ^{c)}	F_{2QMMax}	N	4200					
		lb _f	945					
Max. tilting moment	M_{2KMMax}	Nm	236					
		in.lb	2089					
Efficiency at full load	η	%	95					
Service life	L_h	h	> 20000					
Weight (incl. standard adapter plate)	m	kg	4.7					
		lb _m	10					
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 73					
Max. permitted housing temperature		°C	+90					
		°F	+194					
Ambient temperature		°C	0 to +40					
		°F	+32 to +104					
Lubrication			Lubricated for life					
Direction of rotation			In- and output same direction					
Protection class			IP 64					
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0060BA022.000-X					
Bore diameter of coupling on the application side		mm	X = 012.000 - 032.000					
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	E 19	J_1	kgcm ²	1.2	1.2	1.2	1.2	1.2
			10 ⁻³ in.lb.s ²	1.1	1.1	1.1	1.1	1.1

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com
Please consider the maximal tilting moment caused by the motor M_{1KMot} – see sizing

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange



^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft

Motor shaft diameter [mm]


2-stage

up to 19⁴⁾ (E)⁵⁾
clamping hub
diameter

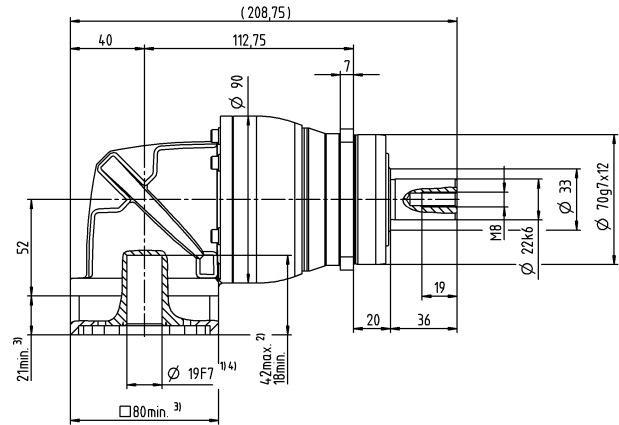


Other output variants

Shaft with key



Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPSK 025 MF 3-stage

				3-stage															
Ratio	i				9	12	15	16	20	25	28	30	32	35	40	50	64	70	100
Max. torque ^{a) b) e)}	T_{2a}			Nm	99	128	128	152	152	160	152	128	152	160	152	160	144	160	144
				in.lb	876	1133	1133	1345	1345	1416	1345	1133	1345	1416	1345	1416	1275	1416	1275
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}			Nm	48	65	80	86	95	100	95	80	95	100	95	100	90	100	90
				in.lb	425	575	708	761	841	885	841	708	841	885	841	885	797	885	797
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}			Nm	124	166	190	190	190	190	190	190	190	190	190	190	190	190	190
				in.lb	1097	1469	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)	n_{1N}			rpm	2900	3300	3300	3300	3300	3300	3300	3300	3300	3300	3300	3300	3300	3300	3300
Max. input speed	n_{1Max}			rpm	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000
Mean no load running torque ^{b)} (at n_1 = 3000 rpm and 20 °C gearbox temperature)	T_{012}			Nm	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97
				in.lb	8.6	8.6	8.6	8.6	8.6	8.6	8.6	8.6	8.6	8.6	8.6	8.6	8.6	8.6	8.6
Max. backlash	j_t			arcmin	≤ 13														
Torsional rigidity ^{b)}	C_{t21}			Nm/arcmin	8.4	8.4	8.4	8.4	8.4	8.4	8.4	8.4	8.4	8.4	8.4	8.4	8.4	8.4	8.4
				in.lb/arcmin	74	74	74	74	74	74	74	74	74	74	74	74	74	74	74
Max. axial force ^{c)}	F_{2AMax}			N	3350														
				lb _f	754														
Max. lateral force ^{c)}	F_{2QMax}			N	4200														
				lb _f	945														
Max. tilting moment	M_{2KMax}			Nm	236														
				in.lb	2089														
Efficiency at full load	η			%	94														
Service life	L_h			h	> 20000														
Weight (incl. standard adapter plate)	m			kg	4.3														
				lb _m	9.5														
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}			dB(A)	≤ 70														
Max. permitted housing temperature				°C	+90														
				°F	+194														
Ambient temperature				°C	0 to +40														
				°F	+32 to +104														
Lubrication					Lubricated for life														
Direction of rotation					In- and output same direction														
Protection class					IP 64														
Elastomer coupling (recommended product type – validate sizing with cymex®)					ELC-0060BA022.000-X														
Bore diameter of coupling on the application side				mm	X = 012.000 - 032.000														
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	C	14	J_i	kgcm ²	0.45	0.45	0.45	0.45	0.45	0.45	0.45	0.45	0.45	0.45	0.45	0.45	0.45	0.45	0.45
				10 ⁻³ in.lb.s ²	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com
Please consider the maximal tilting moment caused by the motor M_{1KMot} – see sizing

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange



^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft

Motor shaft diameter [mm]


3-stage

up to 14⁴⁾ (C)⁵⁾
clamping hub
diameter

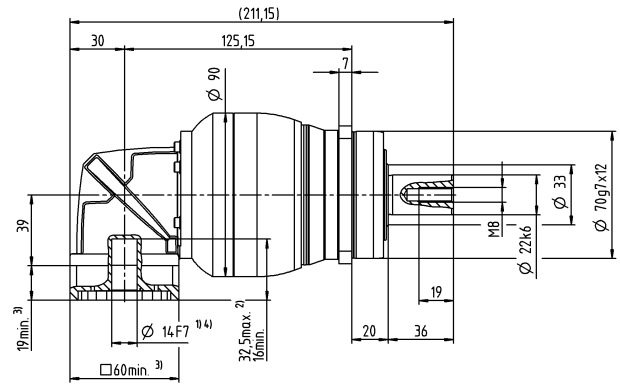


Other output variants

Shaft with key



Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPSK 035 MF 2-stage

			2-stage					
Ratio	i		3	4	5	7	8	10
Max. torque ^{a) b) e)}	T_{2a}	Nm	150	200	250	350	352	352
		in.lb	1328	1770	2213	3098	3115	3115
Max. acceleration torque ^{b)} (max. 1000 cycles per hour)	T_{2B}	Nm	93	124	155	217	220	220
		in.lb	823	1097	1372	1921	1947	1947
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	238	318	397	500	500	500
		in.lb	2106	2815	3514	4425	4425	4425
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)	n_{1N}	rpm	2000	2000	2000	2000	2000	2000
Max. input speed	n_{1Max}	rpm	4500	4500	4500	4500	4500	4500
Mean no load running torque ^{b)} (at $n_1=3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	5.8	5.8	5.8	5.8	5.8	5.8
		in.lb	51	51	51	51	51	51
Max. backlash	j_t	arcmin	≤ 13					
Torsional rigidity ^{b)}	C_{t21}	Nm/arcmin	16	16	16	16	16	16
		in.lb/arcmin	142	142	142	142	142	142
Max. axial force ^{c)}	F_{2AMax}	N	5650					
		lb _f	1271					
Max. lateral force ^{c)}	F_{2QMax}	N	6600					
		lb _f	1485					
Max. tilting moment	M_{2KMax}	Nm	487					
		in.lb	4310					
Efficiency at full load	η	%	95					
Service life	L_h	h	> 20000					
Weight (incl. standard adapter plate)	m	kg	10					
		lb _m	22					
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 74					
Max. permitted housing temperature		°C	+90					
		°F	+194					
Ambient temperature		°C	0 to +40					
		°F	+32 to +104					
Lubrication			Lubricated for life					
Direction of rotation			In- and output same direction					
Protection class			IP 64					
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0150BA032.000-X					
Bore diameter of coupling on the application side		mm	X = 019.000 - 036.000					
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	H 28	J_1	kgcm ²	5.2	5.2	5.2	5.2	5.2
			10 ⁻³ in.lb.s ²	4.6	4.6	4.6	4.6	4.6

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com
Please consider the maximal tilting moment caused by the motor M_{1KMot} – see sizing

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange



^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft

Motor shaft diameter [mm]

2-stage



up to 28 ⁴⁾ (H) ⁵⁾
clamping hub
diameter

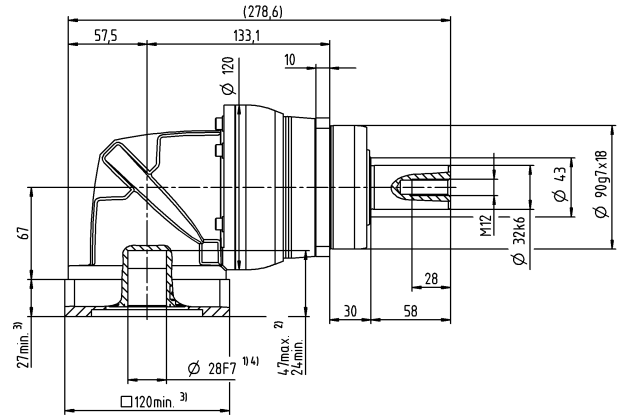

Other output variants

Shaft with key

Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPSK 035 MF 3-stage

				3-stage														
Ratio	i			9	12	15	16	20	25	28	30	32	35	40	50	64	70	100
Max. torque ^{a) b) e)}	T_{2a}	Nm		180	240	300	320	400	400	408	320	408	400	408	400	352	400	352
		$in.lb$		1593	2124	2655	2832	3540	3540	3611	2832	3611	3540	3611	3540	3115	3540	3115
Max. acceleration torque ^{a)} (max. 1000 cycles per hour)	T_{2B}	Nm		105	141	176	188	235	250	255	200	255	250	255	250	220	250	220
		$in.lb$		929	1248	1558	1664	2080	2213	2257	1770	2257	2213	2257	2213	1947	2213	1947
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm		270	361	451	481	500	500	500	500	500	500	500	500	500	500	500
		$in.lb$		2390	3195	3992	4257	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)	n_{1N}	rpm		2700	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000
Max. input speed	n_{1Max}	rpm		5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000
Mean no load running torque ^{b)} (at n_1 =3000 rpm and 20 °C gearbox temperature)	T_{012}	Nm		2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.3
		$in.lb$		20	20	20	20	20	20	20	20	20	20	20	20	20	20	20
Max. backlash	j_t	$arcmin$		≤ 13														
Torsional rigidity ^{b)}	C_{t21}	$Nm/arcmin$		19	19	19	19	19	19	19	19	19	19	19	19	19	19	19
		$in.lb/arcmin$		168	168	168	168	168	168	168	168	168	168	168	168	168	168	168
Max. axial force ^{c)}	F_{2AMax}	N		5650														
		lb_f		1271														
Max. lateral force ^{c)}	F_{2QMax}	N		6600														
		lb_f		1485														
Max. tilting moment	M_{2KMax}	Nm		487														
		$in.lb$		4310														
Efficiency at full load	η	%		94														
Service life	L_h	h		> 20000														
Weight (incl. standard adapter plate)	m	kg		10														
		lb_m		22														
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	$dB(A)$		≤ 73														
Max. permitted housing temperature		°C		+90														
		°F		+194														
Ambient temperature (relates to the drive)		°C		0 to +40														
		°F		+32 to +104														
Lubrication				Lubricated for life														
Direction of rotation				In- and output same direction														
Protection class				IP 64														
Elastomer coupling (recommended product type – validate sizing with cymex®)				ELC-0150BA032.000-X														
Bore diameter of coupling on the application side		mm		X = 019.000 - 036.000														
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	E 19	J_i	$kgcm^2$	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7
			$10^{-3} in.lb.s^2$	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com
Please consider the maximal tilting moment caused by the motor M_{1KMot} – see sizing

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange



^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft

Motor shaft diameter [mm]

3-stage



up to 19⁴⁾ (E)⁵⁾
clamping hub
diameter

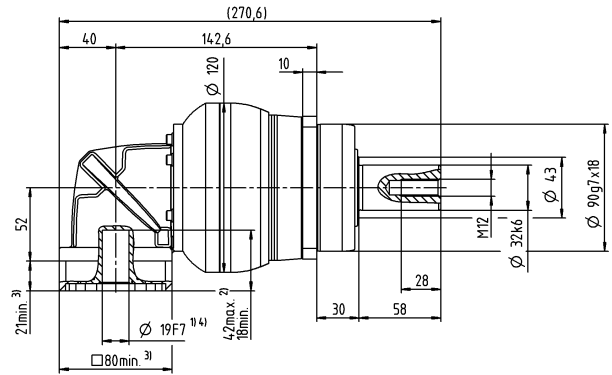

Other output variants

Shaft with key

Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPSK 045 MF 2- / 3-stage

				2-stage			3-stage					
Ratio	i			5	8	10	25	32	50	64	100	
Max. torque ^{a) b) e)}	T_{2a}		Nm	500	640	640	700	640	700	640	640	
			in.lb	4425	5665	5665	6196	5665	6196	5665	5665	
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}		Nm	399	400	400	500	400	500	400	400	
			in.lb	3531	3540	3540	4425	3540	4425	3540	3540	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}		Nm	1000	1000	1000	1000	1000	1000	1000	1000	
			in.lb	8851	8851	8851	8851	8851	8851	8851	8851	
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}		rpm	1600	1600	1600	2000	2000	2000	2000	2000	
Max. input speed	n_{1Max}		rpm	4000	4000	4000	4500	4500	4500	4500	4500	
Mean no load running torque ^{b)} (at n_1 =3000 rpm and 20 °C gearbox temperature)	T_{012}		Nm	8.7	8.7	8.7	4.7	4.7	4.7	4.7	4.7	
			in.lb	77	77	77	42	42	42	42	42	
Max. backlash	j_t		arcmin	≤ 11			≤ 11					
Torsional rigidity ^{b)}	C_{t21}		Nm/arcmin	48	48	48	54	54	54	54	54	
			in.lb/arcmin	425	425	425	478	478	478	478	478	
Max. axial force ^{c)}	F_{2AMax}		N	9870			9870					
			lb _f	2221			2221					
Max. lateral force ^{c)}	F_{2QMMax}		N	9900			9900					
			lb _f	2228			2228					
Max. tilting moment	M_{2KMMax}		Nm	952			952					
			in.lb	8426			8426					
Efficiency at full load	η		%	95			94					
Service life	L_h		h	> 20000			> 20000					
Weight (incl. standard adapter plate)	m		kg	23			21					
			lb _m	51			46					
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}		dB(A)	≤ 78			≤ 74					
Max. permitted housing temperature			°C	+90			+90					
			°F	+194			+194					
Ambient temperature			°C	0 to +40			0 to +40					
			°F	+32 to +104			+32 to +104					
Lubrication				Lubricated for life								
Direction of rotation				In- and output same direction								
Protection class				IP 64								
Elastomer coupling (recommended product type – validate sizing with cymex®)				ELC-0300BA040.000-X								
Bore diameter of coupling on the application side			mm	X = 020.000 - 045.000								
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	H	28	J_1	kgcm ²	–	–	–	6.7	6.7	6.7	6.7	6.7
				10 ⁻³ in.lb.s ²	–	–	–	5.9	5.9	5.9	5.9	5.9
	K	38	J_1	kgcm ²	18	18	18	–	–	–	–	–
				10 ⁻³ in.lb.s ²	16	16	16	–	–	–	–	–

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com
Please consider the maximal tilting moment caused by the motor M_{1KMot} – see sizing

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft

NPTK 005 MF 2- / 3-stage

				2-stage					3-stage										
Ratio		i			4	5	7	8	10	16	20	25	28	35	40	50	64	70	100
Max. torque ^{a) b)}		T_{2a}		Nm	14	17	22	21	21	18	18	22	18	22	18	22	21	22	21
				in.lb	124	150	195	186	186	159	159	195	159	195	159	195	186	195	186
Max. acceleration torque (max. 1000 cycles per hour)		T_{2B}		Nm	6.8	8.5	12	13	13	11	11	13	11	13	11	13	13	13	13
				in.lb	60	75	106	115	115	97	97	115	97	115	97	115	115	115	115
Emergency stop torque ^{a) b)} (permitted 1000 times during the service life of the gearbox)		T_{2Not}		Nm	17	21	26	26	26	26	26	26	26	26	26	26	26	26	26
				in.lb	150	186	230	230	230	230	230	230	230	230	230	230	230	230	230
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)		n_{1N}		rpm	3800	3800	3800	3800	3800	3800	3800	3800	3800	3800	3800	3800	3800	3800	3800
Max. input speed		n_{1Max}		rpm	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000
Mean no load running torque ^{b)} (at n_1 =3000 rpm and 20 °C gearbox temperature)		T_{012}		Nm	0.26	0.26	0.26	0.26	0.26	0.22	0.22	0.22	0.22	0.22	0.22	0.22	0.22	0.22	0.22
				in.lb	2.3	2.3	2.3	2.3	2.3	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9
Max. backlash		j_t		arcmin	≤ 15					≤ 15									
Torsional rigidity ^{b)}		C_{t21}		Nm/arcmin	0.9	0.9	0.9	0.9	0.9	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
				in.lb/arcmin	8	8	8	8	8	11	11	11	11	11	11	11	11	11	11
Max. axial force ^{c)}		F_{2AMax}		N	600					600									
				lb _f	135					135									
Max. tilting moment		M_{2KMax}		Nm	17					17									
				in.lb	150					150									
Efficiency at full load		η		%	95					94									
Service life		L_h		h	> 20000					> 20000									
Weight (incl. standard adapter plate)		m		kg	1.3					1.7									
				lb _m	2.9					3.8									
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)		L_{PA}		dB(A)	≤ 68					≤ 68									
Max. permitted housing temperature				°C	+90					+90									
				°F	+194					+194									
Ambient temperature				°C	0 to +40					0 to +40									
				°F	+32 to +104					+32 to +104									
Lubrication					Lubricated for life														
Direction of rotation					In- and output same direction														
Protection class					IP 64														
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	B	11	J_i	kgcm ²	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11	
				10 ⁻³ in.lb.s ²	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com
Please consider the maximal tilting moment caused by the motor M_{1KMot} – see sizing

^{a)} Valid for torque transmission only



^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures



2-stage

up to 11⁴⁾ (B)⁵⁾
clamping hub
diameter

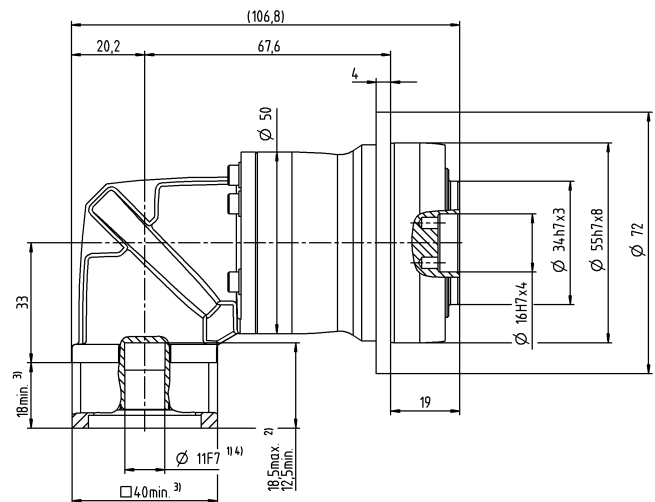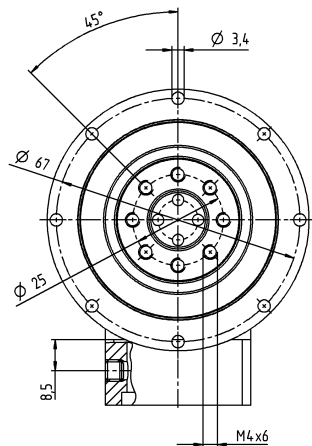

3-stage

up to 11⁴⁾ (B)⁵⁾
clamping hub
diameter

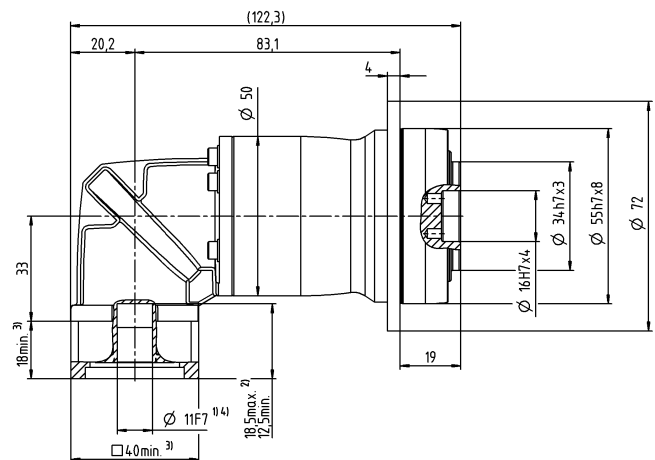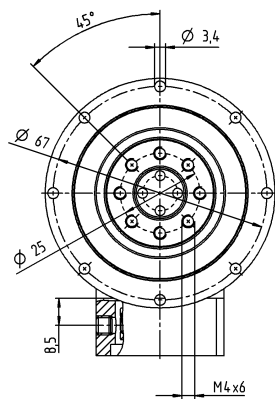

Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPTK 015 MF 2-stage

				2-stage					
Ratio		i		3	4	5	7	8	10
Max. torque ^{a) b)}		T_{2a}	Nm	33	44	55	60	56	56
			$in.lb$	292	389	487	531	496	496
Max. acceleration torque (max. 1000 cycles per hour)		T_{2B}	Nm	16	21	27	37	35	35
			$in.lb$	142	186	239	327	310	310
Emergency stop torque ^{a) b)} (permitted 1000 times during the service life of the gearbox)		T_{2Not}	Nm	41	55	69	75	75	75
			$in.lb$	363	487	611	664	664	664
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)		n_{1N}	rpm	3300	3300	3300	3300	3300	3300
Max. input speed		n_{1Max}	rpm	5000	5000	5000	5000	5000	5000
Mean no load running torque ^{b)} (at n_1 =3000 rpm and 20 °C gearbox temperature)		T_{012}	Nm	0.55	0.55	0.55	0.55	0.55	0.55
			$in.lb$	4.9	4.9	4.9	4.9	4.9	4.9
Max. backlash		j_t	$arcmin$	≤ 15					
Torsional rigidity ^{b)}		C_{t21}	$Nm/arcmin$	2.4	2.4	2.4	2.4	2.4	2.4
			$in.lb/arcmin$	21	21	21	21	21	21
Max. axial force ^{c)}		F_{2AMax}	N	1380					
			lb_f	311					
Max. tilting moment		M_{2KMax}	Nm	42					
			$in.lb$	372					
Efficiency at full load		η	%	95					
Service life		L_h	h	> 20000					
Weight (incl. standard adapter plate)		m	kg	2.4					
			lb_m	5.3					
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)		L_{PA}	$dB(A)$	≤ 70					
Max. permitted housing temperature			°C	+90					
			°F	+194					
Ambient temperature			°C	0 to +40					
			°F	+32 to +104					
Lubrication				Lubricated for life					
Direction of rotation				In- and output same direction					
Protection class				IP 64					
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	C	14	J_1	$kgcm^2$	0.34	0.34	0.34	0.34	0.34
				$10^{-3} in.lb.s^2$	0.3	0.3	0.3	0.3	0.3

Please use our sizing software cymex[®] for a detailed sizing – www.wittenstein-cymex.com
Please consider the maximal tilting moment caused by the motor M_{1KMot} – see sizing

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter



^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures

Motor shaft diameter [mm]

2-stage

up to 14⁴⁾ (C)⁵⁾
clamping hub
diameter

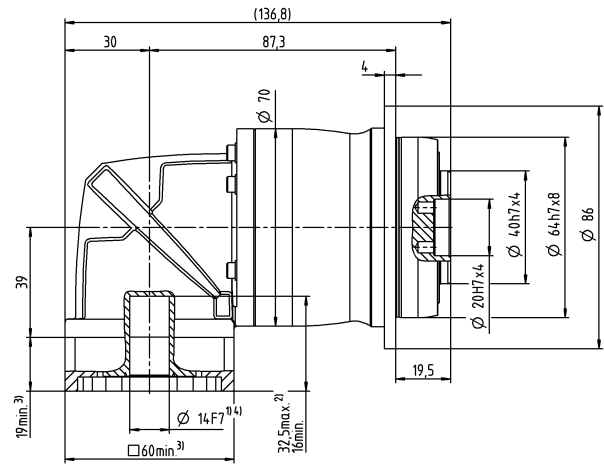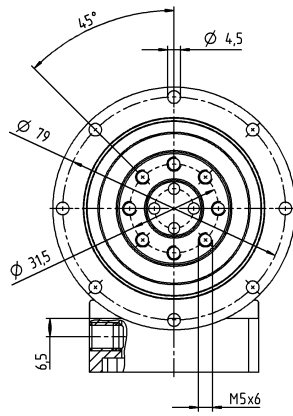

Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPTK 015 MF 3-stage

			3-stage													
Ratio	i		12	15	16	20	25	28	30	32	35	40	50	64	70	100
Max. torque ^{a) b)}	T_{2a}	Nm	42	51	56	56	60	56	51	56	60	56	60	56	60	56
		in.lb	372	451	496	496	531	496	451	496	531	496	531	496	531	496
Max. acceleration torque (max. 1000 cycles per hour)	T_{2B}	Nm	20	25	27	34	40	35	31	35	40	35	40	35	40	35
		in.lb	177	221	239	301	354	310	274	310	354	310	354	310	354	310
Emergency stop torque ^{a) b)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	52	65	70	75	75	75	75	75	75	75	75	75	75	75
		in.lb	460	575	620	664	664	664	664	664	664	664	664	664	664	664
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)	n_{1N}	rpm	3800	3800	3800	3800	3800	3800	3800	3800	3800	3800	3800	3800	3800	3800
Max. input speed	n_{1Max}	rpm	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000
Mean no load running torque ^{b)} (at $n_1=3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	0.26	0.26	0.26	0.26	0.26	0.26	0.26	0.26	0.26	0.26	0.26	0.26	0.26	0.26
		in.lb	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.3
Max. backlash	j_t	arcmin	≤ 12													
Torsional rigidity ^{b)}	C_{t21}	Nm/arcmin	3	3	3	3	3	3	3	3	3	3	3	3	3	3
		in.lb/arcmin	27	27	27	27	27	27	27	27	27	27	27	27	27	27
Max. axial force ^{c)}	F_{2AMax}	N	1380													
		lb _f	311													
Max. tilting moment	M_{2KMax}	Nm	42													
		in.lb	372													
Efficiency at full load	η	%	94													
Service life	L_h	h	> 20000													
Weight (incl. standard adapter plate)	m	kg	2.5													
		lb _m	5.5													
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex [®])	L_{PA}	dB(A)	≤ 68													
Max. permitted housing temperature		°C	+90													
		°F	+194													
Ambient temperature		°C	0 to +40													
		°F	+32 to +104													
Lubrication			Lubricated for life													
Direction of rotation			In- and output same direction													
Protection class			IP 64													
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	B	11	J_1	kgcm ²	0.16	0.16	0.16	0.16	0.16	0.16	0.16	0.16	0.16	0.16	0.16	0.16
				10 ⁻³ in.lb.s ²	0.14	0.14	0.14	0.14	0.14	0.14	0.14	0.14	0.14	0.14	0.14	0.14

Please use our sizing software cymex[®] for a detailed sizing – www.wittenstein-cymex.com
Please consider the maximal tilting moment caused by the motor M_{1KMot} – see sizing

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter



^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures

Motor shaft diameter [mm]

3-stage

up to 11⁴⁾ (B)⁵⁾
clamping hub
diameter

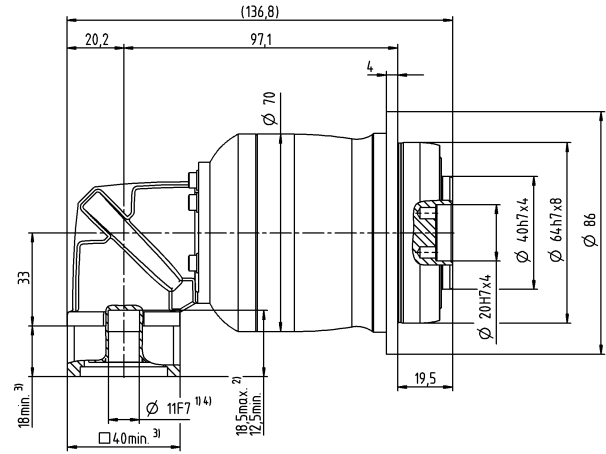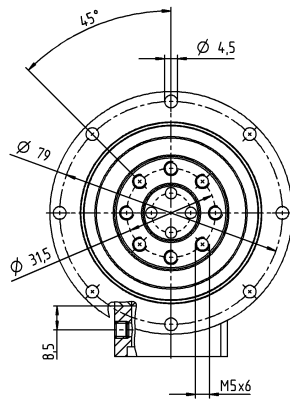

Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPTK 025 MF 2-stage

			2-stage					
Ratio	i		3	4	5	7	8	10
Max. torque ^{a) b)}	T_{2a}	Nm	60	80	100	140	144	144
		in.lb	531	708	885	1239	1275	1275
Max. acceleration torque (max. 1000 cycles per hour)	T_{2B}	Nm	35	47	58	82	90	90
		in.lb	310	416	513	726	797	797
Emergency stop torque ^{a) b)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	90	120	150	190	190	190
		in.lb	797	1062	1328	1682	1682	1682
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)	n_{1N}	rpm	3000	3000	3000	3000	3000	3000
Max. input speed	n_{1Max}	rpm	5000	5000	5000	5000	5000	5000
Mean no load running torque ^{b)} (at $n_1=3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	1	1	1	1	1	1
		in.lb	8.9	8.9	8.9	8.9	8.9	8.9
Max. backlash	j_t	arcmin	≤ 15					
Torsional rigidity ^{b)}	C_{t21}	Nm/arcmin	6.2	6.2	6.2	6.2	6.2	6.2
		in.lb/arcmin	55	55	55	55	55	55
Max. axial force ^{c)}	F_{2AMax}	N	1900					
		lb _f	428					
Max. tilting moment	M_{2KMax}	Nm	79					
		in.lb	699					
Efficiency at full load	η	%	95					
Service life	L_h	h	> 20000					
Weight (incl. standard adapter plate)	m	kg	5.5					
		lb _m	12					
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex [®])	L_{PA}	dB(A)	≤ 73					
Max. permitted housing temperature		°C	+90					
		°F	+194					
Ambient temperature		°C	0 to +40					
		°F	+32 to +104					
Lubrication			Lubricated for life					
Direction of rotation			In- and output same direction					
Protection class			IP 64					
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	E	19	J_1	kgcm ²	1.3	1.3	1.3	1.3
				10 ⁻³ in.lb.s ²	1.2	1.2	1.2	1.2

Please use our sizing software cymex[®] for a detailed sizing – www.wittenstein-cymex.com
Please consider the maximal tilting moment caused by the motor M_{1KMot} – see sizing

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter



^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures

Motor shaft diameter [mm]

2-stage

up to 19⁴⁾ (E)⁵⁾
clamping hub
diameter

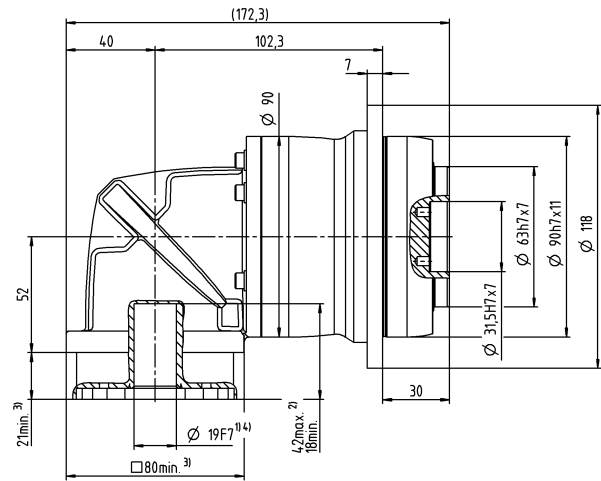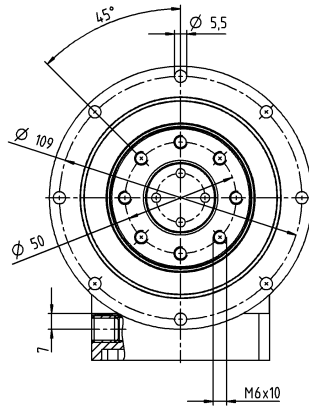

Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPTK 025 MF 3-stage

			3-stage														
Ratio	i		9	12	15	16	20	25	28	30	32	35	40	50	64	70	100
Max. torque ^{a) b)}	T_{2a}	Nm	99	128	128	152	152	160	152	128	152	160	152	160	144	160	144
		in.lb	876	1133	1133	1345	1345	1416	1345	1133	1345	1416	1345	1416	1275	1416	1275
Max. acceleration torque (max. 1000 cycles per hour)	T_{2B}	Nm	48	65	80	86	95	100	95	80	95	100	95	100	90	100	90
		in.lb	425	575	708	761	841	885	841	708	841	885	841	885	797	885	797
Emergency stop torque ^{a) b)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	124	166	190	190	190	190	190	190	190	190	190	190	190	190	190
		in.lb	1097	1469	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)	n_{1N}	rpm	3300	3300	3300	3300	3300	3300	3300	3300	3300	3300	3300	3300	3300	3300	3300
Max. input speed	n_{1Max}	rpm	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000
Mean no load running torque ^{b)} (at $n_1=3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	0.46	0.46	0.46	0.46	0.46	0.46	0.46	0.46	0.46	0.46	0.46	0.46	0.46	0.46	0.46
		in.lb	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1
Max. backlash	j_t	arcmin	≤ 13														
Torsional rigidity ^{b)}	C_{t21}	Nm/arcmin	8.4	8.4	8.4	8.4	8.4	8.4	8.4	8.4	8.4	8.4	8.4	8.4	8.4	8.4	8.4
		in.lb/arcmin	74	74	74	74	74	74	74	74	74	74	74	74	74	74	74
Max. axial force ^{c)}	F_{2AMax}	N	1900														
		lb _f	428														
Max. tilting moment	M_{2KMax}	Nm	79														
		in.lb	699														
Efficiency at full load	η	%	94														
Service life	L_h	h	> 20000														
Weight (incl. standard adapter plate)	m	kg	5.1														
		lb _m	11														
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex [®])	L_{PA}	dB(A)	≤ 70														
Max. permitted housing temperature		°C	+90														
		°F	+194														
Ambient temperature		°C	0 to +40														
		°F	+32 to +104														
Lubrication			Lubricated for life														
Direction of rotation			In- and output same direction														
Protection class			IP 64														
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	C	14	J_1	kgcm ²	0.52	0.52	0.52	0.52	0.52	0.52	0.52	0.52	0.52	0.52	0.52	0.52	0.52
				10 ⁻³ in.lb.s ²	0.46	0.46	0.46	0.46	0.46	0.46	0.46	0.46	0.46	0.46	0.46	0.46	0.46

Please use our sizing software cymex[®] for a detailed sizing – www.wittenstein-cymex.com
Please consider the maximal tilting moment caused by the motor M_{1KMot} – see sizing

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter



^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures

Motor shaft diameter [mm]

3-stage

up to 14⁴⁾ (C)⁵⁾
clamping hub
diameter

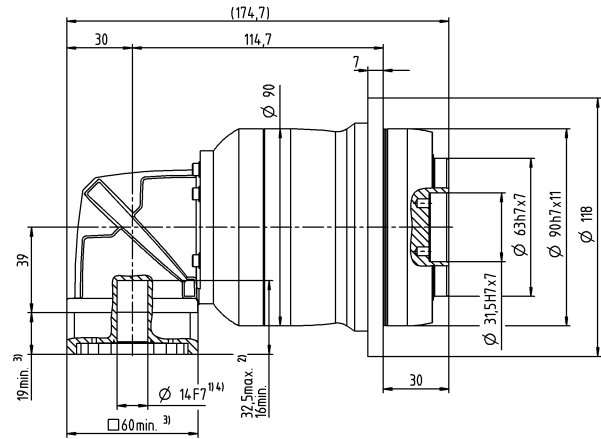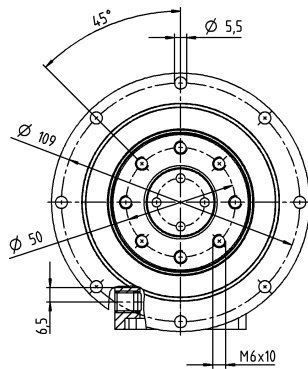

Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPTK 035 MF 2-stage

			2-stage					
Ratio	i		3	4	5	7	8	10
Max. torque ^{a) b)}	T_{2a}	Nm	150	200	250	350	352	352
		in.lb	1328	1770	2213	3098	3115	3115
Max. acceleration torque (max. 1000 cycles per hour)	T_{2B}	Nm	93	124	155	217	220	220
		in.lb	823	1097	1372	1921	1947	1947
Emergency stop torque ^{a) b)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	238	318	397	480	480	480
		in.lb	2106	2815	3514	4248	4248	4248
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)	n_{1N}	rpm	2000	2000	2000	2000	2000	2000
Max. input speed	n_{1Max}	rpm	4500	4500	4500	4500	4500	4500
Mean no load running torque ^{b)} (at $n_1=3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	4.2	4.2	4.2	4.2	4.2	4.2
		in.lb	37	37	37	37	37	37
Max. backlash	j_t	arcmin	≤ 13					
Torsional rigidity ^{b)}	C_{t21}	Nm/arcmin	16	16	16	16	16	16
		in.lb/arcmin	142	142	142	142	142	142
Max. axial force ^{c)}	F_{2AMax}	N	3500					
		lb _f	788					
Max. tilting moment	M_{2KMax}	Nm	134					
		in.lb	1186					
Efficiency at full load	η	%	95					
Service life	L_h	h	> 20000					
Weight (incl. standard adapter plate)	m	kg	11					
		lb _m	24					
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex [®])	L_{PA}	dB(A)	≤ 74					
Max. permitted housing temperature		°C	+90					
		°F	+194					
Ambient temperature		°C	0 to +40					
		°F	+32 to +104					
Lubrication			Lubricated for life					
Direction of rotation			In- and output same direction					
Protection class			IP 64					
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	H	28 J_1	kgcm ²	5.5	5.5	5.5	5.5	5.5
			10 ⁻³ in.lb.s ²	4.9	4.9	4.9	4.9	4.9

Please use our sizing software cymex[®] for a detailed sizing – www.wittenstein-cymex.com
Please consider the maximal tilting moment caused by the motor M_{1KMot} – see sizing

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter



^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures

Motor shaft diameter [mm]

2-stage

up to 28⁴⁾ (H)⁵⁾
clamping hub
diameter

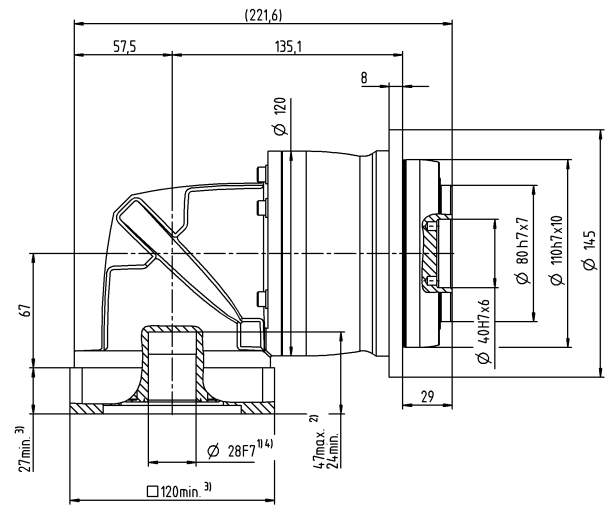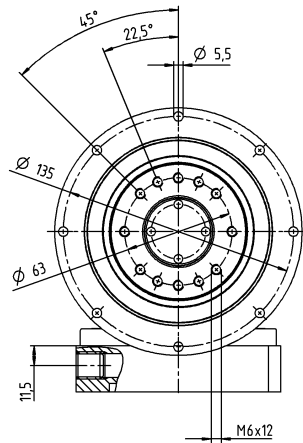

Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated
by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPTK 035 MF 3-stage

				3-stage														
Ratio		i		9	12	15	16	20	25	28	30	32	35	40	50	64	70	100
Max. torque ^{a) b)}		T_{2a}	Nm	180	240	300	320	365	365	365	320	365	365	365	365	352	365	352
			in.lb	1593	2124	2655	2832	3231	3231	3231	2832	3231	3231	3231	3231	3115	3231	3115
Max. acceleration torque (max. 1000 cycles per hour)		T_{2B}	Nm	105	141	176	188	235	250	255	200	255	250	255	250	220	250	220
			in.lb	929	1248	1558	1664	2080	2213	2257	1770	2257	2213	2257	2213	1947	2213	1947
Emergency stop torque ^{a) b)} (permitted 1000 times during the service life of the gearbox)		T_{2Not}	Nm	270	361	451	480	480	480	480	480	480	480	480	480	480	480	480
			in.lb	2390	3195	3992	4248	4248	4248	4248	4248	4248	4248	4248	4248	4248	4248	4248
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)		n_{1N}	rpm	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000
Max. input speed		n_{1Max}	rpm	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000
Mean no load running torque ^{b)} (at n_1 = 3000 rpm and 20 °C gearbox temperature)		T_{012}	Nm	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
			in.lb	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11
Max. backlash		j_t	arcmin	≤ 13														
Torsional rigidity ^{b)}		C_{t21}	Nm/arcmin	19	19	19	19	19	19	19	19	19	19	19	19	19	19	19
			in.lb/arcmin	168	168	168	168	168	168	168	168	168	168	168	168	168	168	168
Max. axial force ^{c)}		F_{2AMax}	N	3500														
			lb _f	788														
Max. tilting moment		M_{2KMax}	Nm	134														
			in.lb	1186														
Efficiency at full load		η	%	94														
Service life		L_h	h	> 20000														
Weight (incl. standard adapter plate)		m	kg	11														
			lb _m	24														
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)		L_{PA}	dB(A)	≤ 73														
Max. permitted housing temperature			°C	+90														
			°F	+194														
Ambient temperature			°C	0 to +40														
			°F	+32 to +104														
Lubrication				Lubricated for life														
Direction of rotation				In- and output same direction														
Protection class				IP 64														
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	E	19	J_1	kgcm ²	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9
				10 ⁻³ in.lb.s ²	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7

Please use our sizing software cymex[®] for a detailed sizing – www.wittenstein-cymex.com
Please consider the maximal tilting moment caused by the motor M_{1KMot} – see sizing

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter



^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures

Motor shaft diameter [mm]

3-stage

up to 19⁴⁾ (E)⁵⁾
clamping hub
diameter

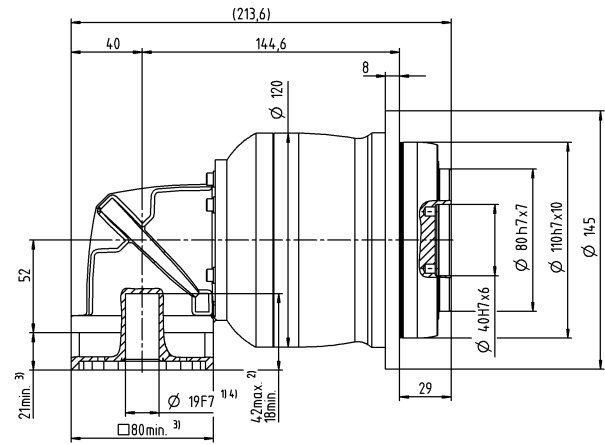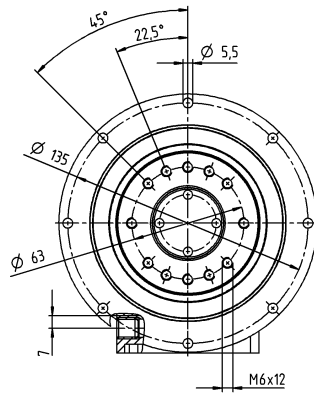

Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPTK 045 MF 2- / 3-stage

				2-stage			3-stage					
Ratio		i			5	8	10	25	32	50	64	100
Max. torque ^{a) b)}		T_{2a}		Nm	500	640	640	700	640	700	640	640
				in.lb	4425	5665	5665	6196	5665	6196	5665	5665
Max. acceleration torque (max. 1000 cycles per hour)		T_{2B}		Nm	399	400	400	500	400	500	400	400
				in.lb	3531	3540	3540	4425	3540	4425	3540	3540
Emergency stop torque ^{a) b)} (permitted 1000 times during the service life of the gearbox)		T_{2Not}		Nm	1000	1000	1000	1000	1000	1000	1000	1000
				in.lb	8851	8851	8851	8851	8851	8851	8851	8851
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)		n_{1N}		rpm	1600	1600	1600	2000	2000	2000	2000	2000
Max. input speed		n_{1Max}		rpm	4000	4000	4000	4500	4500	4500	4500	4500
Mean no load running torque ^{b)} (at n_1 =3000 rpm and 20 °C gearbox temperature)		T_{012}		Nm	6	6	6	3.1	3.1	3.1	3.1	3.1
				in.lb	53	53	53	27	27	27	27	27
Max. backlash		j_t		arcmin	≤ 11			≤ 11				
Torsional rigidity ^{b)}		C_{t21}		Nm/arcmin	48	48	48	54	54	54	54	54
				in.lb/arcmin	425	425	425	478	478	478	478	478
Max. axial force ^{c)}		F_{2AMax}		N	3800			3800				
				lb _f	855			855				
Max. tilting moment		M_{2KMax}		Nm	256			256				
				in.lb	2266			2266				
Efficiency at full load		η		%	95			94				
Service life		L_h		h	> 20000			> 20000				
Weight (incl. standard adapter plate)		m		kg	24			21				
				lb _m	53			46				
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)		L_{PA}		dB(A)	≤ 78			≤ 74				
Max. permitted housing temperature				°C	+90			+90				
				°F	+194			+194				
Ambient temperature				°C	0 to +40			0 to +40				
				°F	+32 to +104			+32 to +104				
Lubrication					Lubricated for life							
Direction of rotation					In- and output same direction							
Protection class					IP 64							
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	H	28	J_1	kgcm ²	–	–	–	7.8	7.8	7.8	7.8	7.8
				10 ⁻³ in.lb.s ²	–	–	–	6.9	6.9	6.9	6.9	6.9
	K	38	J_1	kgcm ²	19	19	19	–	–	–	–	–
				10 ⁻³ in.lb.s ²	17	17	17	–	–	–	–	–

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com
Please consider the maximal tilting moment caused by the motor M_{1KMot} – see sizing

^{a)} Valid for torque transmission only



^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures



2-stage

up to 38⁴⁾ (K)⁵⁾
clamping hub
diameter

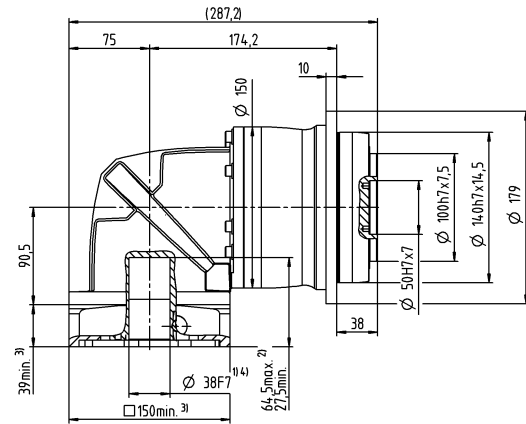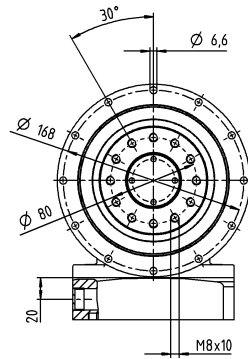

3-stage

up to 28⁴⁾ (H)⁵⁾
clamping hub
diameter

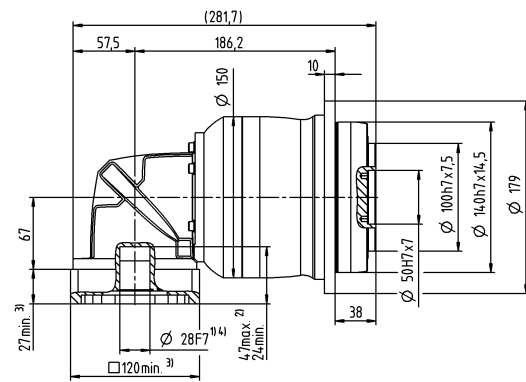

Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPRK 015 MF 2-stage

			2-stage					
Ratio	i		3	4	5	7	8	10
Max. torque ^{a) b) e)}	T_{2a}	Nm	33	44	55	64	56	56
		in.lb	292	389	487	566	496	496
Max. acceleration torque ^{b)} (max. 1000 cycles per hour)	T_{2B}	Nm	16	21	27	37	35	35
		in.lb	142	186	239	327	310	310
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	41	55	69	80	80	80
		in.lb	363	487	611	708	708	708
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)	n_{1N}	rpm	2600	2800	2900	3300	3300	3300
Max. input speed	n_{1Max}	rpm	5000	5000	5000	5000	5000	5000
Mean no load running torque ^{b)} (at $n_1=3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	1.2	1.2	1.2	1.2	1.2	1.2
		in.lb	11	11	11	11	11	11
Max. backlash	j_t	arcmin	≤ 15					
Torsional rigidity ^{b)}	C_{t21}	Nm/arcmin	2.4	2.4	2.4	2.4	2.4	2.4
		in.lb/arcmin	21	21	21	21	21	21
Max. axial force ^{c)}	F_{2AMax}	N	2400					
		lb _f	540					
Max. lateral force ^{c)}	F_{2QMax}	N	2800					
		lb _f	630					
Max. tilting moment	M_{2KMax}	Nm	152					
		in.lb	1345					
Efficiency at full load	η	%	95					
Service life	L_h	h	> 20000					
Weight (incl. standard adapter plate)	m	kg	2.3					
		lb _m	5.1					
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 70					
Max. permitted housing temperature		°C	+90					
		°F	+194					
Ambient temperature		°C	0 to +40					
		°F	+32 to +104					
Lubrication			Lubricated for life					
Direction of rotation			In- and output same direction					
Protection class			IP 64					
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0060BA016.000-X					
Bore diameter of coupling on the application side		mm	X = 012.000 - 032.000					
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	C 14	J_1	kgcm ²	0.32	0.32	0.32	0.32	0.32
			10 ⁻³ in.lb.s ²	0.28	0.28	0.28	0.28	0.28

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com
Please consider the maximal tilting moment caused by the motor M_{1KMot} – see sizing

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange



^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft

Motor shaft diameter [mm]


2-stage

up to 14⁴⁾ (C)⁵⁾
clamping hub
diameter

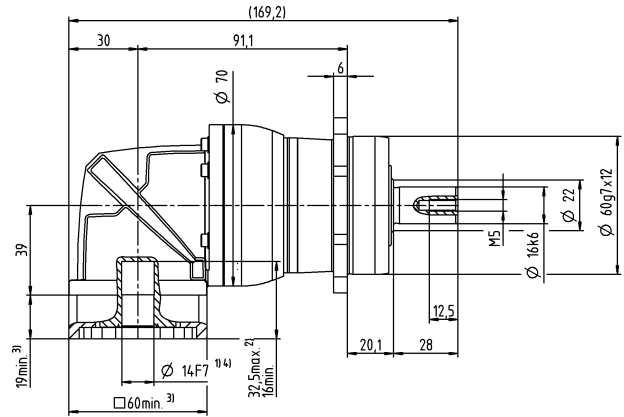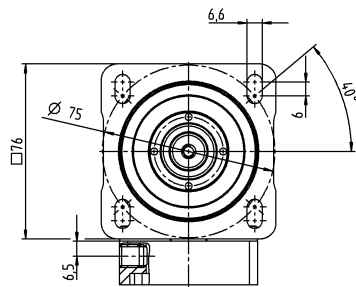


Other output variants

Shaft with key



Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPRK 015 MF 3-stage

			3-stage													
Ratio	i		12	15	16	20	25	28	30	32	35	40	50	64	70	100
Max. torque ^{a) b) e)}	T_{2a}	Nm	42	51	56	56	64	56	51	56	64	56	64	56	64	56
		in.lb	372	451	496	496	566	496	451	496	566	496	566	496	566	496
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}	Nm	20	25	27	34	40	35	31	35	40	35	40	35	40	35
		in.lb	177	221	239	301	354	310	274	310	354	310	354	310	354	310
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	52	65	70	80	80	80	80	80	80	80	80	80	80	80
		in.lb	460	575	620	708	708	708	708	708	708	708	708	708	708	708
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)	n_{1N}	rpm	3800	3800	3800	3800	3800	3800	3800	3800	3800	3800	3800	3800	3800	3800
Max. input speed	n_{1Max}	rpm	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000
Mean no load running torque ^{b)} (at $n_1=3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	0.52	0.52	0.52	0.52	0.52	0.52	0.52	0.52	0.52	0.52	0.52	0.52	0.52	0.52
		in.lb	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6
Max. backlash	j_t	arcmin	≤ 12													
Torsional rigidity ^{b)}	C_{t21}	Nm/arcmin	3	3	3	3	3	3	3	3	3	3	3	3	3	3
		in.lb/arcmin	27	27	27	27	27	27	27	27	27	27	27	27	27	27
Max. axial force ^{c)}	F_{2AMax}	N	2400													
		lb _f	540													
Max. lateral force ^{c)}	F_{2QMMax}	N	2800													
		lb _f	630													
Max. tilting moment	M_{2KMax}	Nm	152													
		in.lb	1345													
Efficiency at full load	η	%	94													
Service life	L_h	h	> 20000													
Weight (incl. standard adapter plate)	m	kg	2.4													
		lb _m	5.3													
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 68													
Max. permitted housing temperature		°C	+90													
		°F	+194													
Ambient temperature		°C	0 to +40													
		°F	+32 to +104													
Lubrication			Lubricated for life													
Direction of rotation			In- and output same direction													
Protection class			IP 64													
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0060BA016.000-X													
Bore diameter of coupling on the application side		mm	X = 012.000 - 032.000													
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	B 11	J_t	kgcm ²	0.14	0.14	0.14	0.14	0.14	0.14	0.14	0.14	0.14	0.14	0.14	0.14	0.14
			10 ⁻³ in.lb.s ²	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12



Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com
Please consider the maximal tilting moment caused by the motor M_{1KMot} – see sizing

- ^{a)} Valid for torque transmission only
- ^{b)} Valid for standard clamping hub diameter
- ^{c)} Refers to center of the output shaft or flange
- ^{d)} Please reduce input speed at higher ambient temperatures
- ^{e)} Valid for: Smooth shaft

Motor shaft diameter [mm]


3-stage

up to 11⁴⁾ (B)⁵⁾
clamping hub
diameter

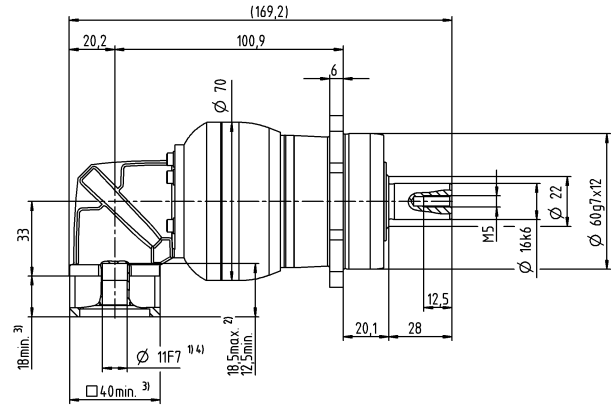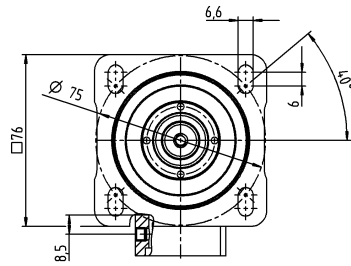


Other output variants

Shaft with key



Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

- 1) Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

4) Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPRK 025 MF 2-stage

			2-stage					
Ratio	i		3	4	5	7	8	10
Max. torque ^{a) b) e)}	T_{2a}	Nm	60	80	100	140	144	144
		in.lb	531	708	885	1239	1275	1275
Max. acceleration torque ^{b)} (max. 1000 cycles per hour)	T_{2B}	Nm	35	47	58	82	90	90
		in.lb	310	416	513	726	797	797
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	90	120	150	190	190	190
		in.lb	797	1062	1328	1682	1682	1682
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)	n_{1N}	rpm	2400	2600	2700	3000	3000	3000
Max. input speed	n_{1Max}	rpm	5000	5000	5000	5000	5000	5000
Mean no load running torque ^{b)} (at $n_1=3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	2.4	2.4	2.4	2.4	2.4	2.4
		in.lb	21	21	21	21	21	21
Max. backlash	j_t	arcmin	≤ 15					
Torsional rigidity ^{b)}	C_{t21}	Nm/arcmin	6.2	6.2	6.2	6.2	6.2	6.2
		in.lb/arcmin	55	55	55	55	55	55
Max. axial force ^{c)}	F_{2AMax}	N	3350					
		lb _f	754					
Max. lateral force ^{c)}	F_{2QMMax}	N	4200					
		lb _f	945					
Max. tilting moment	M_{2KMax}	Nm	236					
		in.lb	2089					
Efficiency at full load	η	%	95					
Service life	L_h	h	> 20000					
Weight (incl. standard adapter plate)	m	kg	4.8					
		lb _m	11					
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 73					
Max. permitted housing temperature		°C	+90					
		°F	+194					
Ambient temperature		°C	0 to +40					
		°F	+32 to +104					
Lubrication			Lubricated for life					
Direction of rotation			In- and output same direction					
Protection class			IP 64					
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0060BA022.000-X					
Bore diameter of coupling on the application side		mm	X = 012.000 - 032.000					
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	E 19	J_1	kgcm ²	1.2	1.2	1.2	1.2	1.2
			10 ⁻³ in.lb.s ²	1.1	1.1	1.1	1.1	1.1

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com
Please consider the maximal tilting moment caused by the motor M_{1KMot} – see sizing

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange



^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft

Motor shaft diameter [mm]


2-stage

up to 19 ⁴⁾ (E) ⁵⁾
clamping hub
diameter

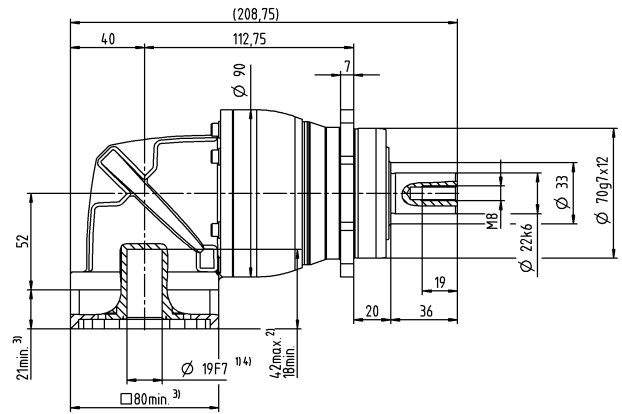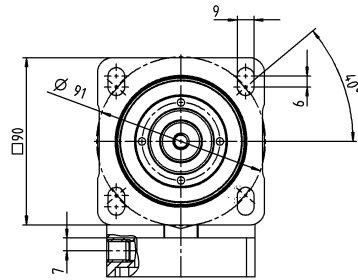


Other output variants

Shaft with key



Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

- 1) Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

4) Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPRK 025 MF 3-stage

				3-stage														
Ratio	i			9	12	15	16	20	25	28	30	32	35	40	50	64	70	100
Max. torque ^{a) b) e)}	T_{2a}	Nm		99	128	128	152	152	160	152	128	152	160	152	160	144	160	144
		$in.lb$		876	1133	1133	1345	1345	1416	1345	1133	1345	1416	1345	1416	1275	1416	1275
Max. acceleration torque ^{a)} (max. 1000 cycles per hour)	T_{2B}	Nm		48	65	80	86	95	100	95	80	95	100	95	100	90	100	90
		$in.lb$		425	575	708	761	841	885	841	708	841	885	841	885	797	885	797
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm		124	166	190	190	190	190	190	190	190	190	190	190	190	190	190
		$in.lb$		1097	1469	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)	n_{1N}	rpm		2800	3300	3300	3300	3300	3300	3300	3300	3300	3300	3300	3300	3300	3300	3300
Max. input speed	n_{1Max}	rpm		5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000
Mean no load running torque ^{b)} (at n_1 =3000 rpm and 20 °C gearbox temperature)	T_{012}	Nm		0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97
		$in.lb$		8.6	8.6	8.6	8.6	8.6	8.6	8.6	8.6	8.6	8.6	8.6	8.6	8.6	8.6	8.6
Max. backlash	j_t	$arcmin$		≤ 13														
Torsional rigidity ^{b)}	C_{t21}	$Nm/arcmin$		8.4	8.4	8.4	8.4	8.4	8.4	8.4	8.4	8.4	8.4	8.4	8.4	8.4	8.4	8.4
		$in.lb/arcmin$		74	74	74	74	74	74	74	74	74	74	74	74	74	74	74
Max. axial force ^{c)}	F_{2AMax}	N		3350														
		lb_f		754														
Max. lateral force ^{c)}	F_{2QMax}	N		4200														
		lb_f		945														
Max. tilting moment	M_{2KMax}	Nm		236														
		$in.lb$		2089														
Efficiency at full load	η	%		94														
Service life	L_h	h		> 20000														
Weight (incl. standard adapter plate)	m	kg		4.4														
		lb_m		9.7														
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	$dB(A)$		≤ 70														
Max. permitted housing temperature		°C		+90														
		°F		+194														
Ambient temperature		°C		0 to +40														
		°F		+32 to +104														
Lubrication				Lubricated for life														
Direction of rotation				In- and output same direction														
Protection class				IP 64														
Elastomer coupling (recommended product type – validate sizing with cymex®)				ELC-0060BA022.000-X														
Bore diameter of coupling on the application side		mm		X = 012.000 - 032.000														
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	C	14	J_i	$kgcm^2$	0.45	0.45	0.45	0.45	0.45	0.45	0.45	0.45	0.45	0.45	0.45	0.45	0.45	0.45
				$10^{-3} in.lb.s^2$	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com
Please consider the maximal tilting moment caused by the motor M_{1KMot} – see sizing

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange



^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft

Motor shaft diameter [mm]

3-stage



up to 14⁴⁾ (C)⁵⁾
clamping hub
diameter

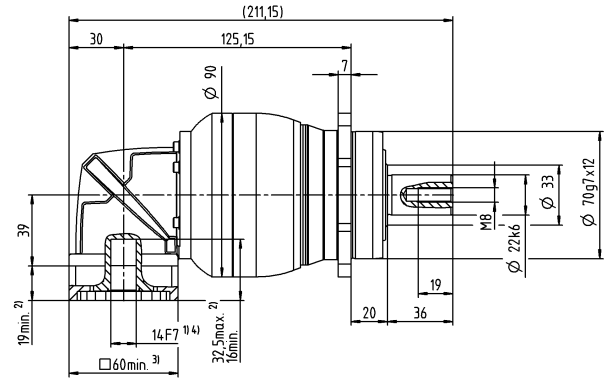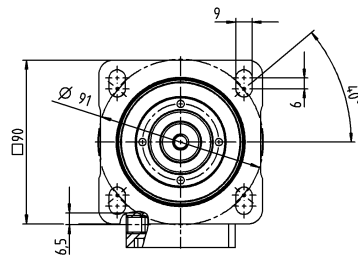

Other output variants

Shaft with key

Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPRK 035 MF 2-stage

			2-stage					
Ratio	i		3	4	5	7	8	10
Max. torque ^{a) b) e)}	T_{2a}	Nm	150	200	250	350	352	352
		in.lb	1328	1770	2213	3098	3115	3115
Max. acceleration torque ^{b)} (max. 1000 cycles per hour)	T_{2B}	Nm	93	124	155	217	220	220
		in.lb	823	1097	1372	1921	1947	1947
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	238	318	397	500	500	500
		in.lb	2106	2815	3514	4425	4425	4425
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)	n_{1N}	rpm	1800	2000	2000	2000	2000	2000
Max. input speed	n_{1Max}	rpm	4500	4500	4500	4500	4500	4500
Mean no load running torque ^{b)} (at $n_1=3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	5.8	5.8	5.8	5.8	5.8	5.8
		in.lb	51	51	51	51	51	51
Max. backlash	j_t	arcmin	≤ 13					
Torsional rigidity ^{b)}	C_{t21}	Nm/arcmin	16	16	16	16	16	16
		in.lb/arcmin	142	142	142	142	142	142
Max. axial force ^{c)}	F_{2AMax}	N	5650					
		lb _f	1271					
Max. lateral force ^{c)}	F_{2QMMax}	N	6600					
		lb _f	1485					
Max. tilting moment	M_{2KMax}	Nm	487					
		in.lb	4310					
Efficiency at full load	η	%	95					
Service life	L_h	h	> 20000					
Weight (incl. standard adapter plate)	m	kg	10					
		lb _m	22					
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 74					
Max. permitted housing temperature		°C	+90					
		°F	+194					
Ambient temperature		°C	0 to +40					
		°F	+32 to +104					
Lubrication			Lubricated for life					
Direction of rotation			In- and output same direction					
Protection class			IP 64					
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0150BA032.000-X					
Bore diameter of coupling on the application side		mm	X = 019.000 - 036.000					
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	H 28	J_1	kgcm ²	5.2	5.2	5.2	5.2	5.2
			10 ⁻³ in.lb.s ²	4.6	4.6	4.6	4.6	4.6

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com
Please consider the maximal tilting moment caused by the motor M_{1KMot} – see sizing

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange



^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft

Motor shaft diameter [mm]

2-stage



up to 28⁴⁾ (H)⁵⁾
clamping hub
diameter

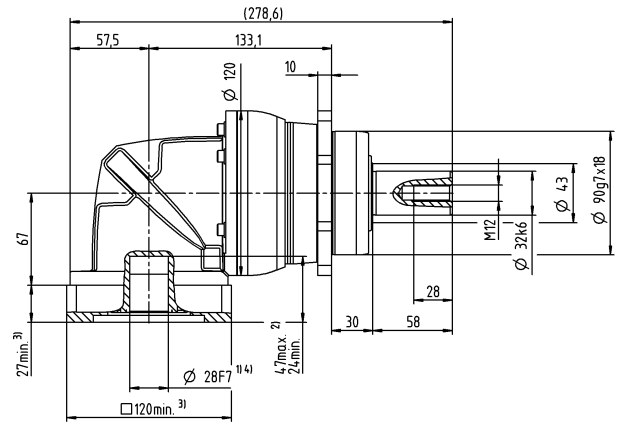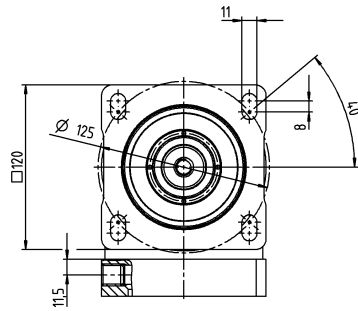

Other output variants

Shaft with key

Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPRK 035 MF 3-stage

				3-stage														
Ratio	i			9	12	15	16	20	25	28	30	32	35	40	50	64	70	100
Max. torque ^{a) b) e)}	T_{2a}	Nm		180	240	300	320	400	400	408	320	408	400	408	400	352	400	352
		$in.lb$		1593	2124	2655	2832	3540	3540	3611	2832	3611	3540	3611	3540	3115	3540	3115
Max. acceleration torque ^{a)} (max. 1000 cycles per hour)	T_{2B}	Nm		105	141	176	188	235	250	255	200	255	250	255	250	220	250	220
		$in.lb$		929	1248	1558	1664	2080	2213	2257	1770	2257	2213	2257	2213	1947	2213	1947
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm		270	361	451	481	500	500	500	500	500	500	500	500	500	500	500
		$in.lb$		2390	3195	3992	4257	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)	n_{1N}	rpm		2600	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000
Max. input speed	n_{1Max}	rpm		5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000
Mean no load running torque ^{b)} (at n_1 =3000 rpm and 20 °C gearbox temperature)	T_{012}	Nm		2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.3
		$in.lb$		20	20	20	20	20	20	20	20	20	20	20	20	20	20	20
Max. backlash	j_t	$arcmin$		≤ 13														
Torsional rigidity ^{b)}	C_{t21}	$Nm/arcmin$		19	19	19	19	19	19	19	19	19	19	19	19	19	19	19
		$in.lb/arcmin$		168	168	168	168	168	168	168	168	168	168	168	168	168	168	168
Max. axial force ^{c)}	F_{2AMax}	N		5650														
		lb_f		1271														
Max. lateral force ^{c)}	F_{2QMax}	N		6600														
		lb_f		1485														
Max. tilting moment	M_{2KMax}	Nm		487														
		$in.lb$		4310														
Efficiency at full load	η	%		94														
Service life	L_h	h		> 20000														
Weight (incl. standard adapter plate)	m	kg		10														
		lb_m		22														
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	$dB(A)$		≤ 73														
Max. permitted housing temperature		°C		+90														
		°F		+194														
Ambient temperature (relates to the drive)		°C		0 to +40														
		°F		+32 to +104														
Lubrication				Lubricated for life														
Direction of rotation				In- and output same direction														
Protection class				IP 64														
Elastomer coupling (recommended product type – validate sizing with cymex®)				ELC-0150BA032.000-X														
Bore diameter of coupling on the application side		mm		X = 019.000 - 036.000														
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	E 19	J_i	$kgcm^2$	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7
			$10^{-3} in.lb.s^2$	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com
Please consider the maximal tilting moment caused by the motor M_{1KMot} – see sizing

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange



^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft

Motor shaft diameter [mm]


3-stage

up to 19⁴⁾ (E)⁵⁾
clamping hub
diameter

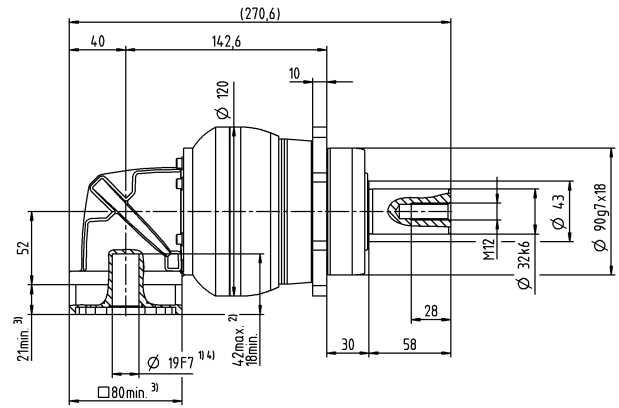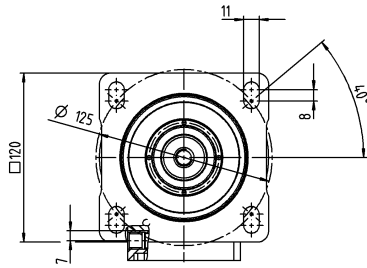


Other output variants

Shaft with key



Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPRK 045 MF 2- / 3-stage

				2-stage			3-stage					
Ratio	i			5	8	10	25	32	50	64	100	
Max. torque ^{a) b) e)}	T_{2a}		Nm	500	640	640	700	640	700	640	640	
			in.lb	4425	5665	5665	6196	5665	6196	5665	5665	
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}		Nm	399	400	400	500	400	500	400	400	
			in.lb	3531	3540	3540	4425	3540	4425	3540	3540	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}		Nm	1000	1000	1000	1000	1000	1000	1000	1000	
			in.lb	8851	8851	8851	8851	8851	8851	8851	8851	
Permitted average input speed ^{d)} (at T_{2n} and 20 °C ambient temperature)	n_{1N}		rpm	1600	1600	1600	2000	2000	2000	2000	2000	
Max. input speed	n_{1Max}		rpm	4000	4000	4000	4500	4500	4500	4500	4500	
Mean no load running torque ^{b)} (at n_1 =3000 rpm and 20 °C gearbox temperature)	T_{012}		Nm	8.7	8.7	8.7	4.7	4.7	4.7	4.7	4.7	
			in.lb	77	77	77	42	42	42	42	42	
Max. backlash	j_t		arcmin	≤ 11			≤ 11					
Torsional rigidity ^{b)}	C_{t21}		Nm/arcmin	48	48	48	54	54	54	54	54	
			in.lb/arcmin	425	425	425	478	478	478	478	478	
Max. axial force ^{c)}	F_{2AMax}		N	9870			9870					
			lb _f	2221			2221					
Max. lateral force ^{c)}	F_{2QMMax}		N	9900			9900					
			lb _f	2228			2228					
Max. tilting moment	M_{2KMMax}		Nm	952			952					
			in.lb	8426			8426					
Efficiency at full load	η		%	95			94					
Service life	L_h		h	> 20000			> 20000					
Weight (incl. standard adapter plate)	m		kg	24			21					
			lb _m	53			46					
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}		dB(A)	≤ 78			≤ 74					
Max. permitted housing temperature			°C	+90			+90					
			°F	+194			+194					
Ambient temperature			°C	0 to +40			0 to +40					
			°F	+32 to +104			+32 to +104					
Lubrication				Lubricated for life								
Direction of rotation				In- and output same direction								
Protection class				IP 64								
Elastomer coupling (recommended product type – validate sizing with cymex®)				ELC-0300BA040.000-X								
Bore diameter of coupling on the application side			mm	X = 020.000 - 045.000								
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	H	28	J_1	kgcm ²	–	–	–	6.7	6.7	6.7	6.7	6.7
				10 ⁻³ in.lb.s ²	–	–	–	5.9	5.9	5.9	5.9	5.9
	K	38	J_1	kgcm ²	18	18	18	–	–	–	–	–
				10 ⁻³ in.lb.s ²	16	16	16	–	–	–	–	–

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com
Please consider the maximal tilting moment caused by the motor M_{1KMot} – see sizing

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter



^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft



2-stage

up to 38⁴⁾ (K)⁵⁾
clamping hub
diameter

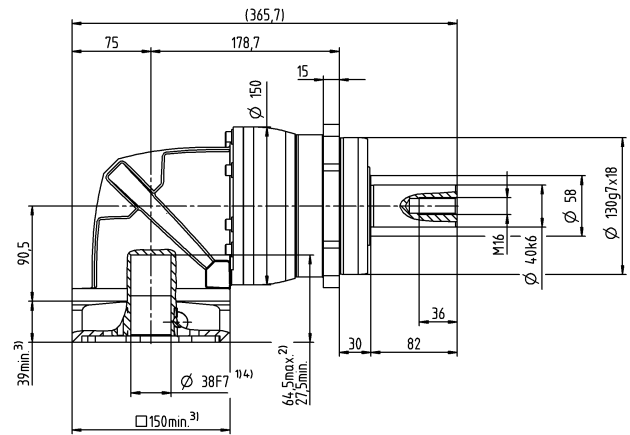

3-stage


up to 28⁴⁾ (H)⁵⁾
clamping hub
diameter

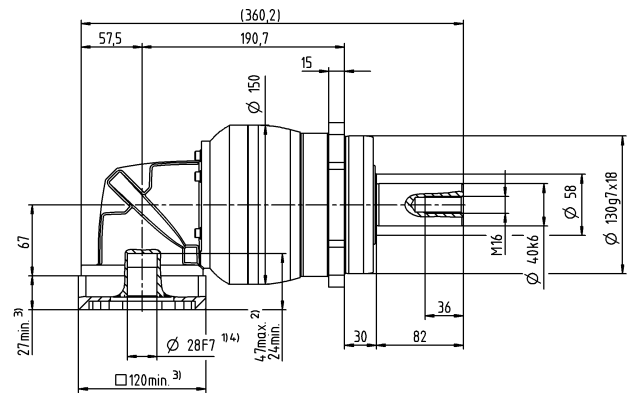


Motor shaft diameter [mm]

Other output variants

Shaft with key



Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated


by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter


alpha Value Line

WORM GEARBOXES NVH / NVS


This product line is characterized by high power density, medium backlash over the entire service life, and supreme running smoothness. The gearboxes are also ideal for use in continuous operation thanks to their low temperature development.

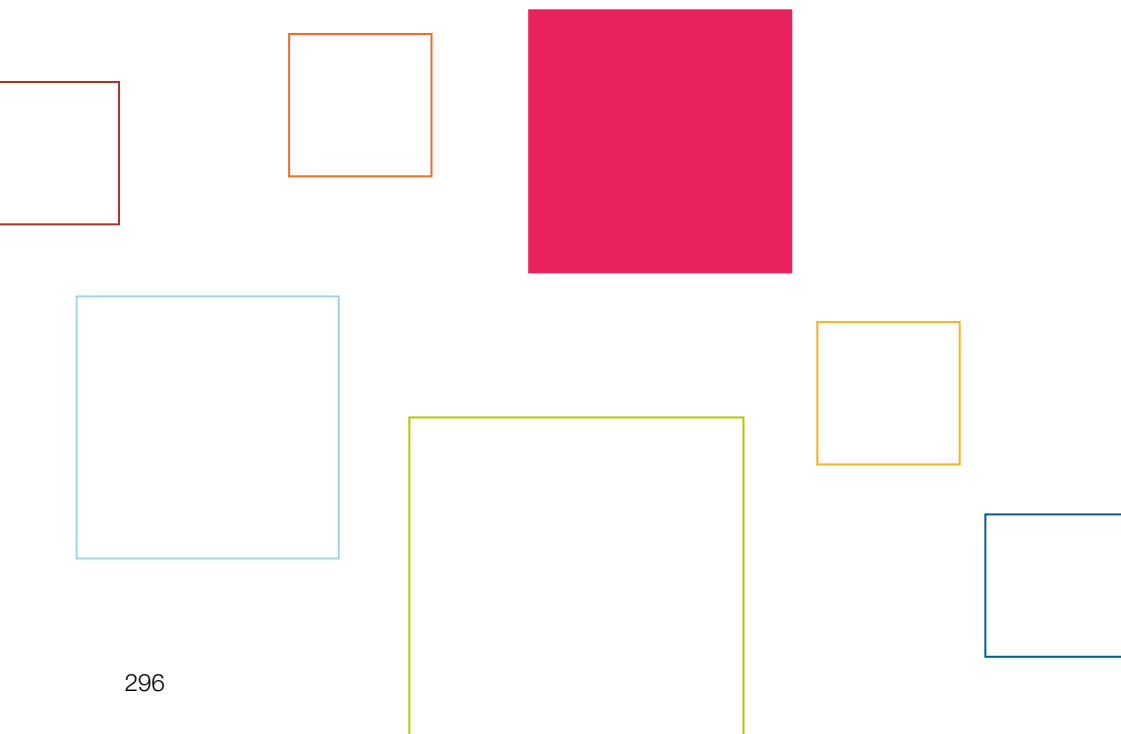

NVH

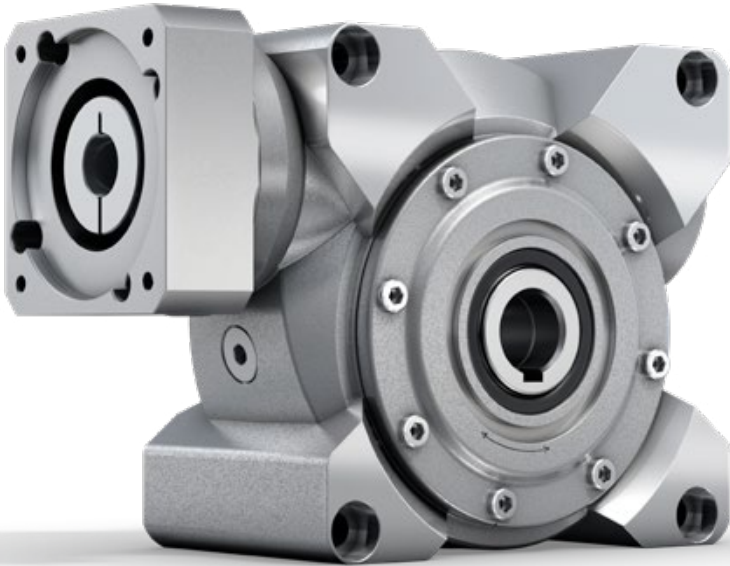


NVS

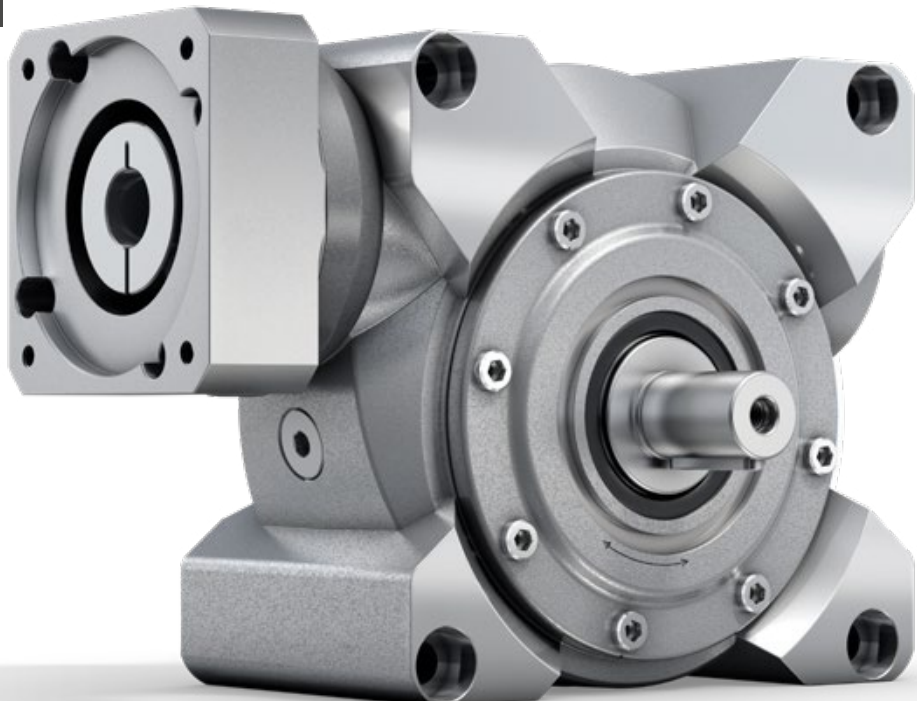

NVH / NVS – We drive the Performance

NVH

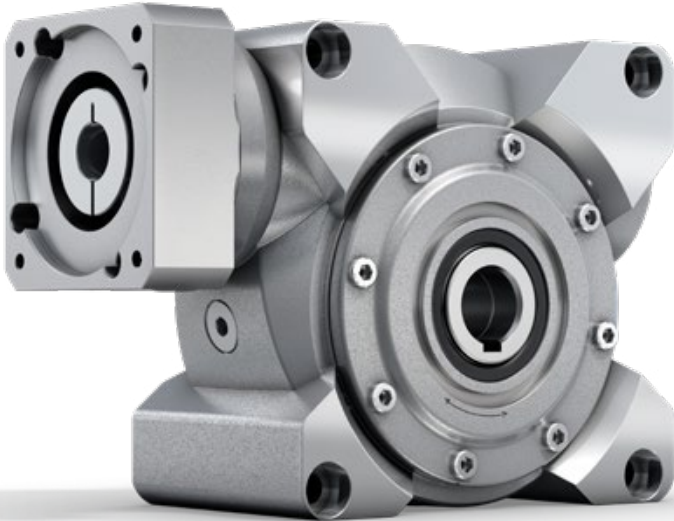

The servo worm gearboxes with hollow shaft and output shaft impress with high power density combined with medium backlash. The V-Drive Value are especially suitable for economical applications in continuous operation.

PRODUCT HIGHLIGHTS



Strong performance

The V-Drive Value convinces with a strong performance in economical standard applications in cyclic and continuous operation. High power density is achieved with medium backlash over the entire service life.



No stick-slip effect

The stick-slip effect is not an issue in applications with the V-Drive Value thanks to the perfected hollow-flank toothing.




High flexibility

In addition to the hollow shaft and shaft output shapes, the worm gearboxes are also available in a corrosion-resistant design.




Constant low backlash

Constant low backlash over the entire service life affords consistent high quality with high positioning accuracy.




NVH – worm gearbox in corrosion-resistant design

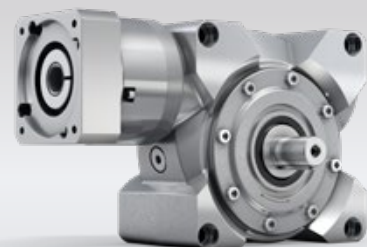

NVS – worm gearbox with integrated planetary input stage

NVS

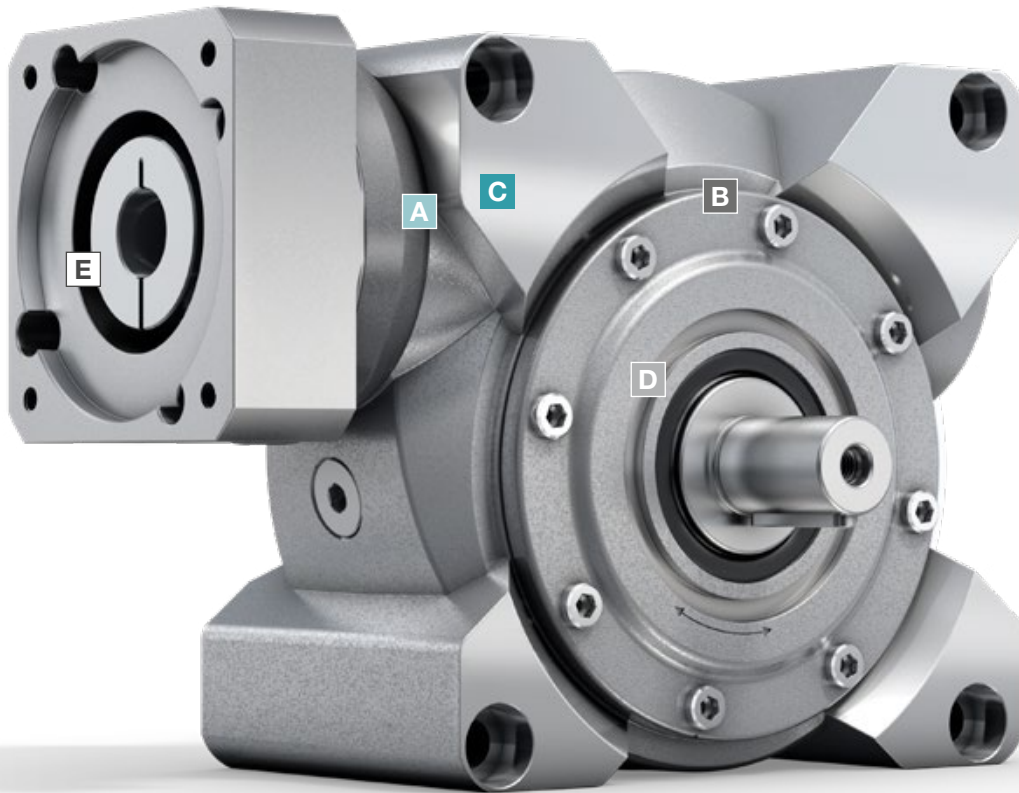

A

Radial shaft seal

- Very long service life
- Optimized for continuous operation

B

Hollow-flank toothing

- Medium torsional backlash accuracy over the entire service life
- High efficiency
- High power density

C

Input bearing

- Bearing package to absorb axial and radial forces
- Very well suited to high input speeds

D


Output bearing

- High overload capacity to absorb axial and radial forces

E

Metal bellows coupling

- Completely backlash free
- Lifetime durable and maintenance free
- Easy assembly
- Protects the motor through thermal linear expansion compensation



NVS – worm gearbox with elastomer coupling ELC



NVS – worm gearbox with rack and pinion

NVH 040 MF 1- /2-stage

			1-stage							2-stage						
Ratio	<i>i</i>		4	7	10	16	28	40	50	70	100	140	200	280	400	
Max. torque ^{a) b)} (at n ₁ = 500 rpm)	<i>T</i> _{2a}	Nm	74	82	91	94	98	91	91	82	91	98	91	98	91	
		in.lb	655	726	805	832	867	805	805	726	805	867	805	867	805	
Emergency stop torque ^{a) b)} (permitted 1000 times during the service life of the gearbox)	<i>T</i> _{2Not}	Nm	118	126	125	129	134	122	125	126	125	134	122	134	122	
		in.lb	1044	1115	1106	1142	1186	1080	1106	1115	1106	1186	1080	1186	1080	
Permitted average input speed ^{d)} (at 20 °C ambient temperature)	<i>n</i> _{1N}	rpm	4000							4400						
Max. input speed	<i>n</i> _{1Max}	rpm	6000													
Mean no load running torque ^{b)} (at n _i = 3000 rpm and 20 °C gearbox temperature)	<i>T</i> ₀₁₂	Nm	0.8	0.7	0.6	0.5	0.4	0.4	0.4	0.2	0.2	0.4	0.4	0.3	0.2	
		in.lb	7.1	6.2	5.3	4.4	3.5	3.5	3.5	1.8	1.8	3.5	3.5	2.7	1.8	
Max. backlash	<i>j</i> _t	arcmin	≤ 6							≤ 7						
Torsional rigidity ^{b)}	<i>C</i> _{t21}	Nm/arcmin	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	
		in.lb/arcmin	40	40	40	40	40	40	40	40	40	40	40	40	40	
Max. axial force ^{c)}	<i>F</i> _{2AMax}	N	3000													
		lb _f	675													
Max. lateral force ^{b)}	<i>F</i> _{2QMax}	N	2400													
		lb _f	540													
Max. tilting moment	<i>M</i> _{2KMax}	Nm	205													
		in.lb	1814													
Efficiency at full load (at n _i = 500 rpm)	<i>η</i>	%	93	90	88	82	73	67	86	88	86	71	65	71	65	
Service life	<i>L</i> _h	h	> 20000													
Weight (incl. standard adapter plate)	<i>m</i>	kg	5							5.6						
		lb _m	11.1							12						
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	<i>L</i> _{PA}	dB(A)	< 54							< 58						
Max. permitted housing temperature		°C	+90													
		°F	+194													
Ambient temperature		°C	−15 to +40													
		°F	+5 to +104													
Lubrication			Lubricated for life													
Direction of rotation			See drawing													
Protection class			IP 65													
Shrink disc (Standard Version)			SD 024x050 S2													
Max. torque (without axial force)	<i>T</i> _{max}	Nm	250													
		in.lb	2213													
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	C	14	<i>J</i> ₁	kgcm ²	0.53	0.38	0.35	0.32	0.32	0.32	0.25	0.28	0.24	0.23	0.19	0.18
				10 ^{−3} in.lb.s ²	0.47	0.34	0.31	0.28	0.28	0.34	0.22	0.25	0.21	0.2	0.17	0.16
	E	19	<i>J</i> ₁	kgcm ²	0.55	0.41	0.38	0.35	0.34	0.33	0.4	0.4	0.36	0.34	0.3	0.3
				10 ^{−3} in.lb.s ²	0.49	0.36	0.34	0.31	0.3	0.29	0.35	0.35	0.32	0.30	0.27	0.27

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com


^{a)} At max. 10 % F_{2QMax}

^{b)} Valid for standard clamping hub diameter


^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures


up to 14/19 ⁴⁾ (C ⁶⁾/E)
clamping hub
diameter

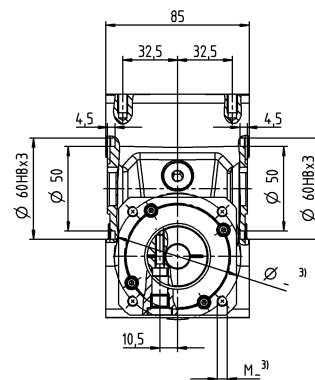

up to 14/19 ⁴⁾ (C ⁶⁾/E)
clamping hub
diameter

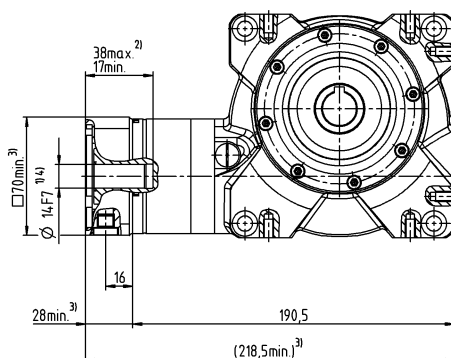

Hollow shaft interfaces on both sides

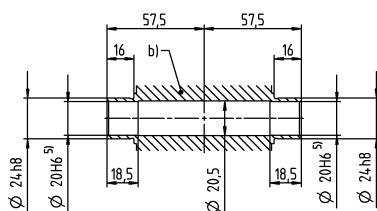

NVH 050 MF 1- /2-stage

			1-stage							2-stage						
Ratio	<i>i</i>		4	7	10	16	28	40	50	70	100	140	200	280	400	
Max. torque ^{a) b)} (at n ₁ = 500 rpm)	<i>T</i> _{2a}	<i>Nm</i>	130	150	153	157	167	141	153	150	153	167	141	167	141	
		<i>in.lb</i>	1151	1328	1354	1389	1478	1248	1354	1328	1354	1478	1248	1478	1248	
Emergency stop torque ^{a) b)} (permitted 1000 times during the service life of the gearbox)	<i>T</i> _{2Not}	<i>Nm</i>	230	242	242	250	262	236	242	242	242	262	236	262	236	
		<i>in.lb</i>	2036	2142	2142	2213	2319	2089	2142	2142	2142	2319	2089	2319	2089	
Permitted average input speed ^{d)} (at 20 °C ambient temperature)	<i>n</i> _{1N}	<i>rpm</i>	4000							3500						
Max. input speed	<i>n</i> _{1Max}	<i>rpm</i>	6000													
Mean no load running torque ^{b)} (at n _i = 3000 rpm and 20 °C gearbox temperature)	<i>T</i> ₀₁₂	<i>Nm</i>	2.3	2.2	1.6	1.5	1.2	1.1	0.7	0.5	0.4	0.6	0.6	0.4	0.4	
		<i>in.lb</i>	20.4	19.5	14.2	13.3	10.6	9.7	6.2	4.4	3.5	5.3	5.3	3.5	3.5	
Max. backlash	<i>j</i> _t	<i>arcmin</i>	≤ 6							≤ 7						
Torsional rigidity ^{b)}	<i>C</i> _{t21}	<i>Nm/arcmin</i>	8	8	8	8	8	8	8	8	8	8	8	8	8	
		<i>in.lb/arcmin</i>	71	71	71	71	71	71	71	71	71	71	71	71	71	
Max. axial force ^{c)}	<i>F</i> _{2AMax}	<i>N</i>	5000													
		<i>lb_f</i>	1125													
Max. lateral force ^{b)}	<i>F</i> _{2QMax}	<i>N</i>	3800													
		<i>lb_f</i>	855													
Max. tilting moment	<i>M</i> _{2KMax}	<i>Nm</i>	409													
		<i>in.lb</i>	3620													
Efficiency at full load (at n _i = 500 rpm)	<i>η</i>	%	92	89	86	82	72	64	84	87	84	70	62	70	62	
Service life	<i>L</i> _h	<i>h</i>	> 20000													
Weight (incl. standard adapter plate)	<i>m</i>	<i>kg</i>	8							8.7						
		<i>lb_m</i>	17.7							19						
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	<i>L</i> _{PA}	<i>dB(A)</i>	≤ 62													
Max. permitted housing temperature		°C	+90													
		°F	+194													
Ambient temperature		°C	−15 to +40													
		°F	+5 to +104													
Lubrication			Lubricated for life													
Direction of rotation			See drawing													
Protection class			IP 65													
Shrink disc (Standard Version)			SD 030x060 S2V													
Max. torque (without axial force)	<i>T</i> _{max}	<i>Nm</i>	550													
		<i>in.lb</i>	4868													
Mass moment of inertia (relates to the drive)	C	14	<i>J</i> ₁	<i>kgcm²</i>	-	-	-	-	-	-	0.8	0.8	0.8	0.7	0.7	0.7
				<i>10⁻³ in.lb.s²</i>	-	-	-	-	-	-	0.71	0.71	0.71	0.62	0.62	0.62
	E	19	<i>J</i> ₁	<i>kgcm²</i>	1.47	1.21	1.12	1.03	1	1.05	1.2	1.3	1.2	1.1	1.1	1.1
				<i>10⁻³ in.lb.s²</i>	1.3	1.07	0.99	0.91	0.89	0.93	1.06	1.15	1.06	0.97	0.97	0.97

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} At max. 10 % F_{2QMax}




^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures


1-stage

up to 19⁴⁾ (E⁶⁾
clamping hub
diameter

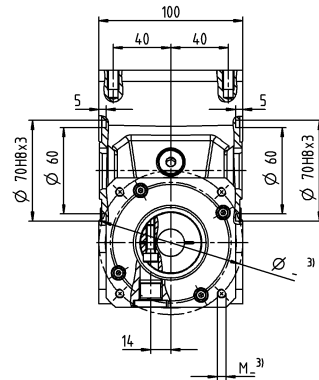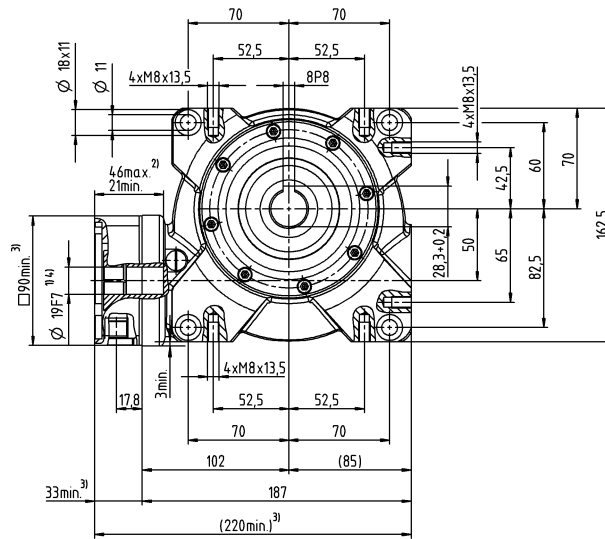

2-stage


up to 14/19⁴⁾ (C⁶⁾/E
clamping hub
diameter

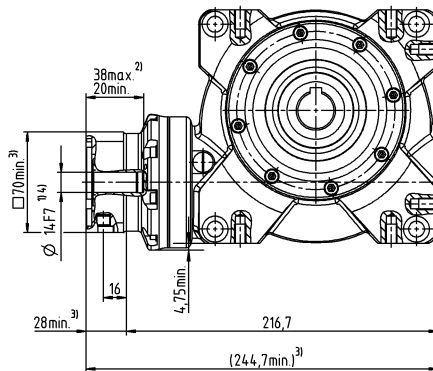

Motor shaft diameter [mm]

Other output variants

Hollow shaft interfaces on both sides

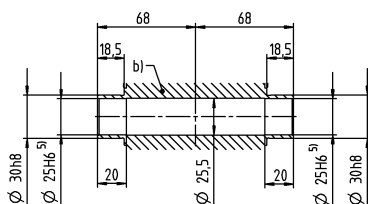

- a) Hollow shaft, keyed on both sides
- b) Hollow shaft interfaces on both sides
- c) End disc for screw M10 (on request)
- d) End disc as forcing washer for screw M12 (on request)
- e) Locking ring – DIN 472 (on request)

See technical data sheet for available clamping hub diameters (mass moment of inertia). Dimensions available on request.

Non-tolerated dimensions are nominal dimensions

- ¹⁾ Check motor shaft fit
- ²⁾ Min./Max. permissible motor shaft length
Longer motor shafts are adaptable, please contact us
- ³⁾ The dimensions depend on the motor
- ⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm
- ⁵⁾ Tolerance h6 for mounted shaft
- ⁶⁾ Standard clamping hub diameter

NVH 063 MF 1- / 2-stage

			1-stage							2-stage						
Ratio	<i>i</i>		4	7	10	16	28	40	50	70	100	140	200	280	400	
Max. torque ^{a) b)} (at n ₁ = 500 rpm)	<i>T</i> _{2a}	Nm	250	303	319	331	365	321	319	303	319	365	321	365	321	
		in.lb	2213	2682	2823	2929	3230	2841	2823	2682	2823	3230	2841	3230	2841	
Emergency stop torque ^{a) b)} (permitted 1000 times during the service life of the gearbox)	<i>T</i> _{2Not}	Nm	460	484	491	494	518	447	491	484	494	518	447	518	447	
		in.lb	4071	4283	4345	4372	4584	3956	4345	4283	4372	4584	3956	4584	3956	
Permitted average input speed ^{d)} (at 20 °C ambient temperature)	<i>n</i> _{1N}	rpm	4000							3100						
Max. input speed	<i>n</i> _{1Max}	rpm	4500													
Mean no load running torque ^{b)} (at n ₁ = 3000 rpm and 20 °C gearbox temperature)	<i>T</i> ₀₁₂	Nm	4.2	3.1	3	2.4	2.3	2.2	1.2	0.7	0.7	1.1	1.1	0.8	0.6	
		in.lb	37.2	27.4	26.6	21.2	20.4	19.5	10.6	6.2	6.2	9.7	9.7	7.1	5.3	
Max. backlash	<i>j</i> _t	arcmin	≤ 6							≤ 7						
Torsional rigidity ^{b)}	<i>C</i> _{t21}	Nm/arcmin	28	28	28	28	28	28	28	28	28	28	28	28	28	
		in.lb/arcmin	248	248	248	248	248	248	248	248	248	248	248	248	248	
Max. axial force ^{c)}	<i>F</i> _{2AMax}	N	8250													
		lb _f	1856													
Max. lateral force ^{b)}	<i>F</i> _{2QMax}	N	6000													
		lb _f	1350													
Max. tilting moment	<i>M</i> _{2KMax}	Nm	843													
		in.lb	7461													
Efficiency at full load (at n ₁ = 500 rpm)	<i>η</i>	%	93	91	88	83	74	68	86	89	86	72	66	72	66	
Service life	<i>L</i> _h	h	> 20000													
Weight (incl. standard adapter plate)	<i>m</i>	kg	13							13.7						
		lb _m	28.7							30						
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	<i>L</i> _{PA}	dB(A)	≤ 64													
Max. permitted housing temperature		°C	+90													
		°F	+194													
Ambient temperature		°C	–15 to +40													
		°F	+5 to +104													
Lubrication			Lubricated for life													
Direction of rotation			See drawing													
Protection class			IP 65													
Shrink disc (Standard Version)			SD 036x072 S2V													
Max. torque (without axial force)	<i>T</i> _{max}	Nm	640													
		in.lb	5664													
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	E 19	<i>J</i> ₁	kgcm ²	-	-	-	-	-	-	2.6	2.8	2.5	2.4	2.4	2.4	2.3
			10 ⁻³ in.lb.s ²	-	-	-	-	-	-	-	2.3	2.48	2.21	2.12	2.12	2.12
	G 24	<i>J</i> ₁	kgcm ²	-	-	-	-	-	-	4.1	4.3	4.1	4	4	3.9	3.9
			10 ⁻³ in.lb.s ²	-	-	-	-	-	-	3.63	3.81	3.63	3.54	3.54	3.45	3.45
	H 28	<i>J</i> ₁	kgcm ²	4.8	3.89	3.65	3.56	3.52	3.47	-	-	-	-	-	-	-
			10 ⁻³ in.lb.s ²	4.25	3.44	3.23	3.15	3.12	3.07	-	-	-	-	-	-	-

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} At max. 10 % F_{2QMax}




^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures


1-stage

up to 28⁴⁾ (H)⁶⁾
clamping hub
diameter

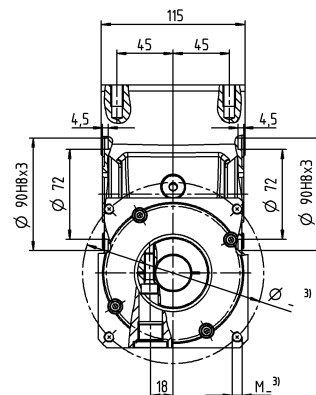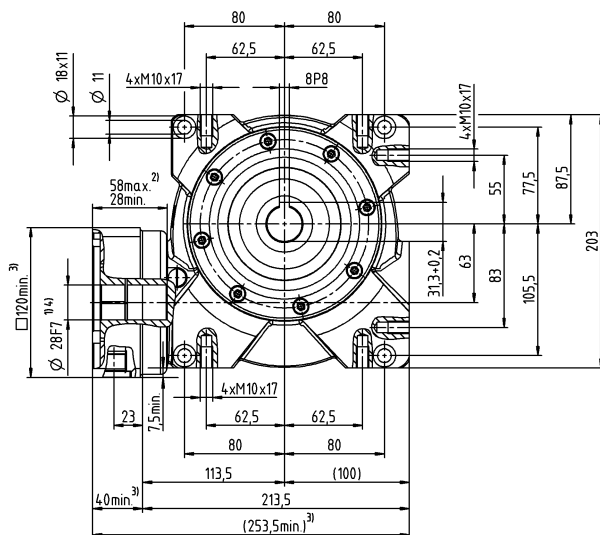


2-stage

up to 19/24⁴⁾ (E⁶⁾/G)
clamping hub
diameter

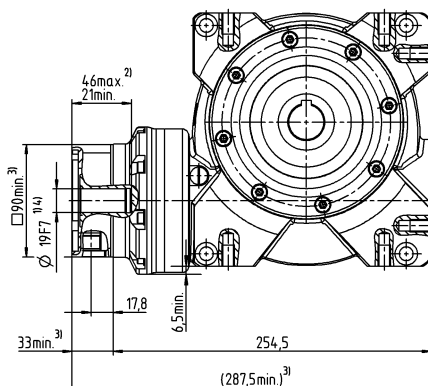

Other output variants

Hollow shaft interfaces on both sides

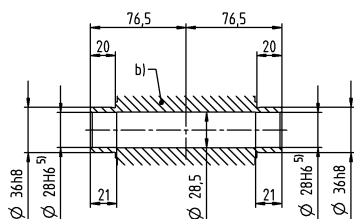

- a) Hollow shaft, keyed on both sides
- b) Hollow shaft interfaces on both sides
- c) End disc for screw M10 (on request)
- d) End disc as forcing washer for screw M12 (on request)
- e) Locking ring – DIN 472 (on request)

See technical data sheet for available clamping hub diameters (mass moment of inertia). Dimensions available on request.

Non-tolerated dimensions are nominal dimensions

- ¹⁾ Check motor shaft fit
- ²⁾ Min./Max. permissible motor shaft length
Longer motor shafts are adaptable, please contact us
- ³⁾ The dimensions depend on the motor
- ⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm
- ⁵⁾ Tolerance h6 for mounted shaft
- ⁶⁾ Standard clamping hub diameter

NVS 040 MF 1-/2-stage

			1-stage						2-stage								
Ratio	<i>i</i>			4	7	10	16	28	40	50	70	100	140	200	280	400	
Max. torque ^{a) b) e)} (at <i>n</i> ₁ = 500 rpm)	<i>T</i> _{2a}	<i>Nm</i>	63	73	87	89	96	84	91	82	91	98	91	98	91		
		<i>in.lb</i>	558	646	770	788	850	743	805	726	805	867	805	867	805		
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	<i>T</i> _{2Not}	<i>Nm</i>	118	126	125	129	134	122	125	126	125	134	122	134	122		
		<i>in.lb</i>	1044	1115	1106	1142	1186	1080	1106	1115	1106	1186	1080	1186	1080		
Permitted average input speed ^{d)} (at 20 °C ambient temperature)	<i>n</i> _{1N}	<i>rpm</i>	4000							4400							
Max. input speed	<i>n</i> _{1Max}	<i>rpm</i>	6000														
Mean no load running torque ^{b)} (at <i>n</i> ₁ = 3000 rpm and 20 °C gearbox temperature)	<i>T</i> ₀₁₂	<i>Nm</i>	0.8	0.7	0.6	0.5	0.4	0.4	0.4	0.4	0.2	0.2	0.4	0.4	0.3	0.2	
		<i>in.lb</i>	7.1	6.2	5.3	4.4	3.5	3.5	3.5	3.5	1.8	1.8	3.5	3.5	2.7	1.8	
Max. backlash	<i>j</i> _t	<i>arcmin</i>	≤ 6							≤ 7							
Torsional rigidity ^{b)}	<i>C</i> _{t21}	<i>Nm/arcmin</i>	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	
		<i>in.lb/arcmin</i>	40	40	40	40	40	40	40	40	40	40	40	40	40	40	
Max. axial force ^{c)}	<i>F</i> _{2AMax}	<i>N</i>	3000														
		<i>lb_f</i>	675														
Max. lateral force ^{b)}	<i>F</i> _{2QMax}	<i>N</i>	2400														
		<i>lb_f</i>	540														
Max. tilting moment	<i>M</i> _{2KMax}	<i>Nm</i>	205														
		<i>in.lb</i>	1814														
Efficiency at full load (at <i>n</i> ₁ = 500 rpm)	<i>η</i>	%	93	90	88	82	73	67	86	88	86	71	65	71	65		
Service life	<i>L</i> _h	<i>h</i>	> 20000														
Weight (incl. standard adapter plate)	<i>m</i>	<i>kg</i>	5							5.6							
		<i>lb_m</i>	11.1							12							
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	<i>L</i> _{PA}	<i>dB(A)</i>	≤ 54							≤ 58							
Max. permitted housing temperature		°C	+90														
		°F	+194														
Ambient temperature		°C	−15 to +40														
		°F	+5 to +104														
Lubrication			Lubricated for life														
Direction of rotation			See drawing														
Protection class			IP 65														
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC - 00060B - 016.000 - X														
Bore diameter of coupling on the application side		<i>mm</i>	X = 016.000 - 032.000														
Mass moment of inertia (relates to the drive)	C	14	<i>J</i> ₁	<i>kgcm</i> ²	0.53	0.38	0.35	0.33	0.32	0.32	0.25	0.28	0.24	0.23	0.19	0.18	0.18
				<i>10⁻³ in.lb.s</i> ²	0.47	0.34	0.31	0.29	0.28	0.28	0.22	0.25	0.21	0.2	0.17	0.16	0.16
	E	19	<i>J</i> ₁	<i>kgcm</i> ²	0.55	0.41	0.38	0.35	0.34	0.34	0.36	0.4	0.36	0.34	0.3	0.3	0.3
				<i>10⁻³ in.lb.s</i> ²	0.49	0.36	0.34	0.31	0.3	0.3	0.32	0.35	0.32	0.3	0.27	0.27	0.27

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} At max. 10 % F_{2QMax}

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft


1-stage

up to 14/19 ⁴⁾ (C ⁶⁾/E)
clamping hub
diameter

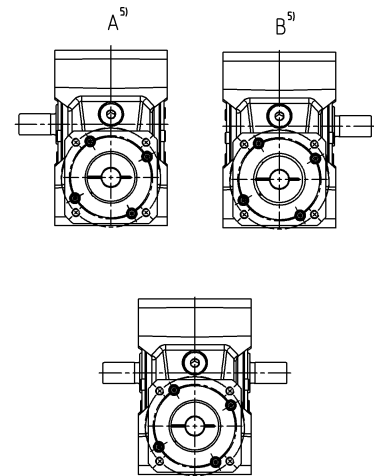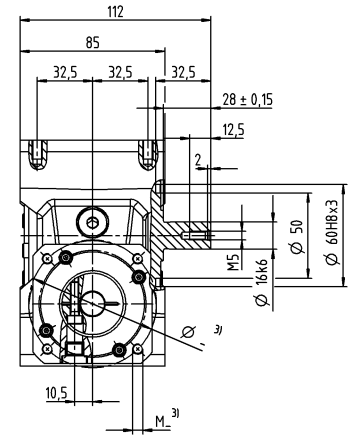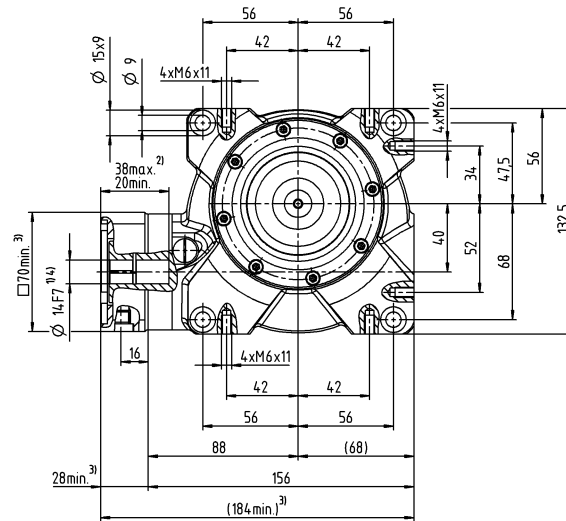

2-stage

up to 14/19 ⁴⁾ (C ⁶⁾/E)
clamping hub
diameter

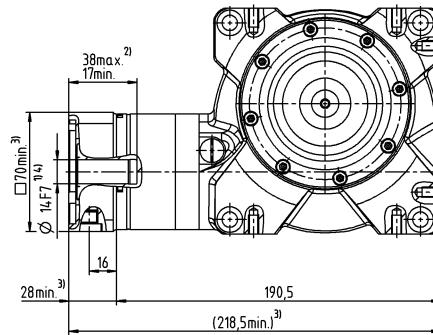


Motor shaft diameter [mm]

Optional dual-shaft output. Drawings available on request.
Involute gearing is not possible.

Other output variants

Shaft with key



See technical data sheet for available clamping hub diameters
(mass moment of inertia). Dimensions available on request.

Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min./Max. permissible motor shaft length

Longer motor shafts are adaptable, please contact us

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a
bushing with a minimum thickness of 1 mm

⁵⁾ Output side

⁶⁾ Standard clamping hub diameter

NVS 050 MF 1-/2-stage

			1-stage							2-stage							
Ratio	<i>i</i>		4	7	10	16	28	40	50	70	100	140	200	280	400		
Max. torque ^{a) b) e)} (at <i>n</i> ₁ = 500 rpm)	<i>T</i> _{2a}	<i>Nm</i>	130	150	153	157	167	141	153	150	153	167	141	167	141		
		<i>in.lb</i>	1151	1328	1354	1389	1478	1248	1354	1328	1354	1478	1248	1478	1248		
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	<i>T</i> _{2Not}	<i>Nm</i>	230	242	242	250	262	236	242	242	242	262	236	262	236		
		<i>in.lb</i>	2036	2142	2142	2213	2319	2089	2142	2142	2142	2319	2089	2319	2089		
Permitted average input speed ^{d)} (at 20 °C ambient temperature)	<i>n</i> _{1N}	<i>rpm</i>	4000							3500							
Max. input speed	<i>n</i> _{1Max}	<i>rpm</i>	6000														
Mean no load running torque ^{b)} (at <i>n</i> ₁ = 3000 rpm and 20 °C gearbox temperature)	<i>T</i> ₀₁₂	<i>Nm</i>	2.3	2.2	1.6	1.5	1.2	1.1	0.7	0.5	0.4	0.6	0.6	0.4	0.4		
		<i>in.lb</i>	20.4	19.5	14.2	13.3	10.6	9.7	6.2	4.4	3.5	5.3	5.3	3.5	3.5		
Max. backlash	<i>j</i> _t	<i>arcmin</i>	≤ 6							≤ 7							
Torsional rigidity ^{b)}	<i>C</i> _{t21}	<i>Nm/arcmin</i>	8	8	8	8	8	8	8	8	8	8	8	8	8		
		<i>in.lb/arcmin</i>	71	71	71	71	71	71	71	71	71	71	71	71	71		
Max. axial force ^{c)}	<i>F</i> _{2AMax}	<i>N</i>	5000														
		<i>lb_f</i>	1125														
Max. lateral force ^{b)}	<i>F</i> _{2QMax}	<i>N</i>	3800														
		<i>lb_f</i>	855														
Max. tilting moment	<i>M</i> _{2KMax}	<i>Nm</i>	409														
		<i>in.lb</i>	3620														
Efficiency at full load (at <i>n</i> ₁ = 500 rpm)	<i>η</i>	%	92	89	86	82	72	64	84	87	84	70	62	70	62		
Service life	<i>L</i> _h	<i>h</i>	> 20000														
Weight (incl. standard adapter plate)	<i>m</i>	<i>kg</i>	8							8.7							
		<i>lb_m</i>	17.7							19							
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	<i>L</i> _{PA}	<i>dB(A)</i>	≤ 62														
Max. permitted housing temperature		°C	+90														
		°F	+194														
Ambient temperature		°C	−15 to +40														
		°F	+5 to +104														
Lubrication			Lubricated for life														
Direction of rotation			See drawing														
Protection class			IP 65														
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC - 00150B - 022.000 - X														
Bore diameter of coupling on the application side		<i>mm</i>	X = 022.000 - 036.000														
Mass moment of inertia (relates to the drive)	C	14	<i>J</i> ₁	<i>kgcm²</i>	-	-	-	-	-	-	0.8	0.8	0.8	0.7	0.7	0.7	0.7
				<i>10⁻³ in.lb.s²</i>	-	-	-	-	-	-	0.71	0.71	0.71	0.62	0.62	0.62	0.62
Clamping hub diameter [mm]	E	19	<i>J</i> ₁	<i>kgcm²</i>	1.47	1.21	1.12	1.03	1	1.05	1.2	1.3	1.2	1.1	1.1	1.1	1.1
				<i>10⁻³ in.lb.s²</i>	1.3	1.07	0.99	0.91	0.89	0.93	1.06	1.15	1.06	0.97	0.97	0.97	0.97

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} At max. 10 % F_{2QMax}

^{b)} Valid for standard clamping hub diameter



^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft



1-stage

up to 19⁴⁾ (E⁶⁾
clamping hub
diameter

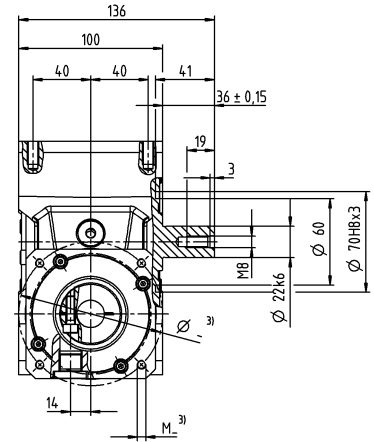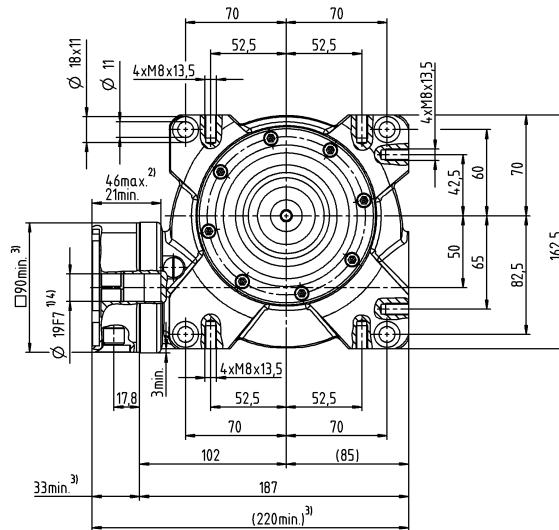

2-stage


up to 14/19⁴⁾ (C⁶⁾/E
clamping hub
diameter

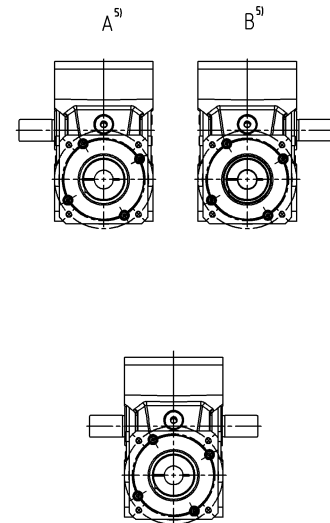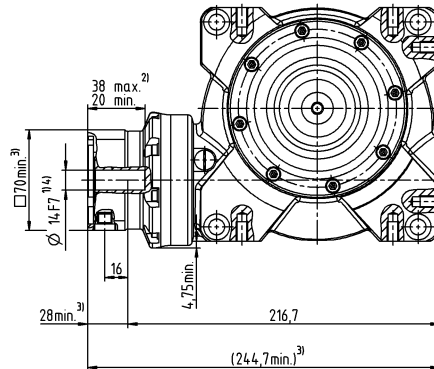

Optional dual-shaft output. Drawings available on request.
Involute gearing is not possible.

Other output variants

Shaft with key



See technical data sheet for available clamping hub diameters
(mass moment of inertia). Dimensions available on request.

Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min./Max. permissible motor shaft length

Longer motor shafts are adaptable, please contact us

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a

bushing with a minimum thickness of 1 mm

⁵⁾ Output side

⁶⁾ Standard clamping hub diameter

NVS 063 MF 1- / 2-stage

			1-stage							2-stage						
Ratio	<i>i</i>		4	7	10	16	28	40	50	70	100	140	200	280	400	
Max. torque ^{a) b) e)} (at n ₁ = 500 rpm)	<i>T</i> _{2a}	Nm	250	303	319	331	365	321	319	303	319	365	321	365	321	
		in.lb	2213	2682	2823	2929	3230	2841	2823	2682	2823	3230	2841	3230	2841	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	<i>T</i> _{2Not}	Nm	460	484	491	494	518	447	491	484	494	518	447	518	447	
		in.lb	4071	4283	4345	4372	4584	3956	4345	4283	4372	4584	3956	4584	3956	
Permitted average input speed ^{d)} (at 20 °C ambient temperature)	<i>n</i> _{1N}	rpm	4000						3100							
Max. input speed	<i>n</i> _{1Max}	rpm	4500													
Mean no load running torque ^{b)} (at n _r = 3000 rpm and 20 °C gearbox temperature)	<i>T</i> ₀₁₂	Nm	4.2	3.1	3	2.4	2.3	2.2	1.2	0.7	0.7	1.1	1.1	0.8	0.6	
		in.lb	37.2	27.4	26.6	21.2	20.4	19.5	10.6	6.2	6.2	9.7	9.7	7.1	5.3	
Max. backlash	<i>j</i> _t	arcmin	≤ 6						≤ 7							
Torsional rigidity ^{b)}	<i>C</i> _{t21}	Nm/arcmin	28	28	28	28	28	28	28	28	28	28	28	28	28	
		in.lb/arcmin	248	248	248	248	248	248	248	248	248	248	248	248	248	
Max. axial force ^{c)}	<i>F</i> _{2AMax}	N	8250													
		lb _f	1856													
Max. lateral force ^{b)}	<i>F</i> _{2QMax}	N	6000													
		lb _f	1350													
Max. tilting moment	<i>M</i> _{2KMax}	Nm	843													
		in.lb	7461													
Efficiency at full load (at n ₁ = 500 rpm)	<i>η</i>	%	93	91	88	83	74	68	86	89	86	72	66	72	66	
Service life	<i>L</i> _h	h	> 20000													
Weight (incl. standard adapter plate)	<i>m</i>	kg	13						13.7							
		lb _m	28.7						30							
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	<i>L</i> _{PA}	dB(A)	≤ 64													
Max. permitted housing temperature		°C	+90													
		°F	+194													
Ambient temperature		°C	−15 to +40													
		°F	+5 to +104													
Lubrication			Lubricated for life													
Direction of rotation			See drawing													
Protection class			IP 65													
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC - 00300B - 032.000 - X													
Bore diameter of coupling on the application side		mm	X = 032.000 - 045.000													
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	E 19	<i>J</i> ₁	kgcm ²	-	-	-	-	-	-	2.6	2.8	2.50	2.4	2.4	2.4	2.3
			10 ⁻³ in.lb.s ²	-	-	-	-	-	-	2.3	2.48	2.21	2.12	2.12	2.12	2.04
	G 24	<i>J</i> ₁	kgcm ²	-	-	-	-	-	-	4.1	4.3	4.1	4	4	3.9	3.9
			10 ⁻³ in.lb.s ²	-	-	-	-	-	-	3.63	3.81	3.63	3.54	3.54	3.45	3.45
	H 28	<i>J</i> ₁	kgcm ²	4.8	3.89	3.65	3.56	3.52	3.47	-	-	-	-	-	-	-
			10 ⁻³ in.lb.s ²	4.25	3.44	3.23	3.15	3.12	3.07	-	-	-	-	-	-	-

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} At max. 10 % F_{2QMax}

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft


1-stage

up to 28⁴⁾ (H)⁶⁾
clamping hub
diameter

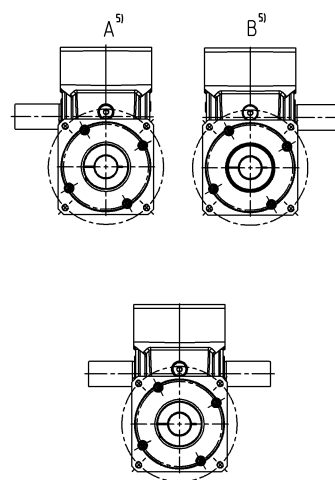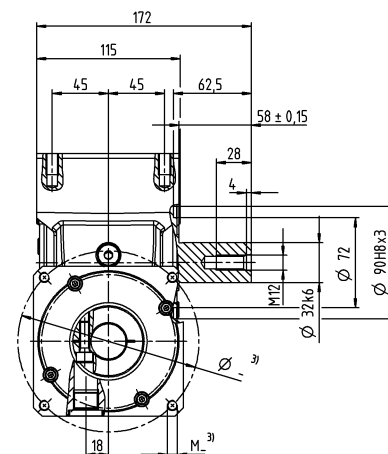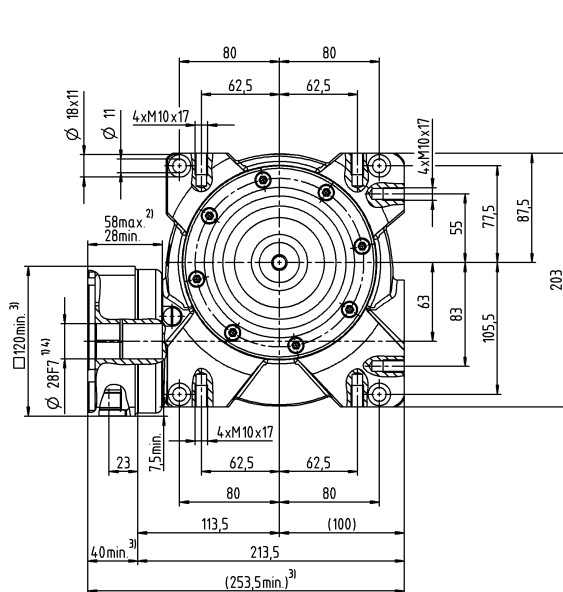

2-stage

up to 19/24⁴⁾ (E⁶⁾/G)
clamping hub
diameter

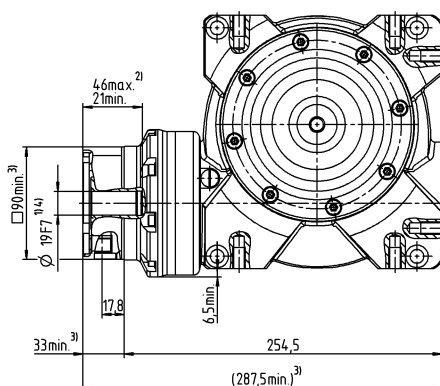


Motor shaft diameter [mm]

Optional dual-shaft output. Drawings available on request.
Involute gearing is not possible.

Other output variants

Shaft with key



See technical data sheet for available clamping hub diameters
(mass moment of inertia). Dimensions available on request.

Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min./Max. permissible motor shaft length

Longer motor shafts are adaptable, please contact us

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a
bushing with a minimum thickness of 1 mm

⁵⁾ Output side

⁶⁾ Standard clamping hub diameter


Application-specific solutions

HYGIENIC DESIGN HDV

Our Hygienic Design products are specially developed for unusual fields of application in food processing. They are made with highly resistant stainless steel and ideally suited for cleaning with aggressive cleaning agents and disinfectants. Direct process integration allows new design freedom and an open machine concept without encasings.




The world's first
EHEDG-certified
planetary gearbox



Robotic systems



Food and drinks
industry



Process technology



Cosmetics



Pharmaceuticals

AREAS OF APPLICATION

HDV – Reliably Clean



HDV

Aseptic, highly dynamic, and outstanding positioning accuracy: the HDV is the world's first planetary gearbox with EHEDG certification and meets the strict hygiene requirements of production and packaging facilities. The gearbox in hygienic design not only offers you maximum safety against contamination-related product and process risks, but also guarantees maximum plant availability and productivity of the equipment.

PRODUCT HIGHLIGHTS



New design freedom

Direct process integration opens up new design options.



Resistance

Resistant against chemical cleaning agents and disinfectants.



Cleaning

Fast, efficient, and safe cleaning, also suitable for CIP processes.



Max. achievable impermeability

IP69X (max. 30 bar).
Relating to DIN 60529:2014-09



The world's first
EHEDG-certified
planetary gearbox



Pharmaceuticals – bottling plant for liquid pharmaceutical products



Cosmetics – bottling plant for creams



More information about the HDV: simply scan the QR code using your smartphone.
www.wittenstein.de/en-en/hygienic-design/




- A Certification**
- World's first EHEDG-certified planetary gearbox
 - FDA certified
 - NSF certified
- D Maximum safety**
- Triple sealing concept
 - Seals resistant to cleaning agents
 - IP69X (max. 30 bar)

- B Surface texture**
- Smooth-rolled surface made of hygienic steel 1.4404
 - Electropolished surface also optionally possible

- C Cavity-free housing design**
- No undercuts
 - Large radii
 - No horizontal surfaces



Sweet goods – packaging plant for cookies

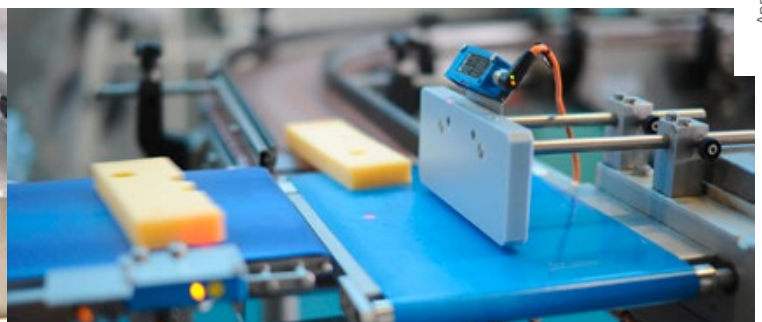

Milk products – cheese processing plant

HDV 015 MF 1-/2-stage

				1-stage				2-stage							
Ratio	i				4	5	7	10	16	20	25	35	50	70	100
Max. torque ^{a) b) e)}	T_{2a}			Nm	51	51	51	46	51	51	51	51	51	51	46
				in.lb	451	451	451	407	451	451	451	451	451	451	407
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}			Nm	32	32	32	29	32	32	32	32	32	32	29
				in.lb	283	283	283	257	283	283	283	283	283	283	257
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}			Nm	75	75	75	75	75	75	75	75	75	75	75
				in.lb	664	664	664	664	664	664	664	664	664	664	664
Permitted average input speed ^{d)} (at T_{2a} and 20 °C ambient temperature)	n_{1N}			rpm	3000	3000	3000	3000	3700	3700	3700	3700	3700	3700	3700
Max. input speed	n_{1Max}			rpm	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000
Mean no load running torque ^{b)} (at n_1 =3000 rpm and 20 °C gearbox temperature)	T_{012}			Nm	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15
				in.lb	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3
Max. backlash	j_t			arcmin	≤ 10				≤ 15						
Torsional rigidity ^{b)}	C_{t21}			Nm/arcmin	2.3	2.3	2.3	2	2.3	2.3	2.3	2.3	2.3	2.3	2
				in.lb/arcmin	20	20	20	18	20	20	20	20	20	20	18
Max. axial force ^{c)} (Standard / HIGH FORCES)	F_{2AMax}			N	500 / 1000				500 / 1000						
				lb _f	113 / 225				113 / 225						
Max. lateral force ^{c)} (Standard / HIGH FORCES)	F_{2QMax}			N	350 / 1600				350 / 1600						
				lb _f	79 / 360				79 / 360						
Max. tilting moment (Standard / HIGH FORCES)	M_{2KMax}			Nm	20 / 105				20 / 105						
				in.lb	177 / 929				177 / 929						
Efficiency at full load	η			%	97				95						
Service life	L_h			h	> 20000				> 20000						
Weight (incl. standard adapter plate)	m			kg	3.2				3.8						
				lb _m	7.1				8.4						
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}			dB(A)	≤ 60				≤ 60						
Max. permitted housing temperature				°C	+90				+90						
				°F	+194				+194						
Ambient temperature				°C	-25 to +40				-25 to +40						
				°F	-13 to +104				-13 to +104						
Lubrication				Lubricated for life											
Direction of rotation				In- and output same direction											
Protection class				IP 69X											
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	C	14	J_1	kgcm ²	0.18	0.17	0.15	0.15	0.17	0.16	0.16	0.15	0.15	0.15	0.15
				10 ⁻³ in.lb.s ²	0.16	0.15	0.13	0.13	0.15	0.14	0.14	0.13	0.13	0.13	0.13

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter


^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft


1-stage

up to 14⁴⁾ (C)⁵⁾
clamping hub
diameter

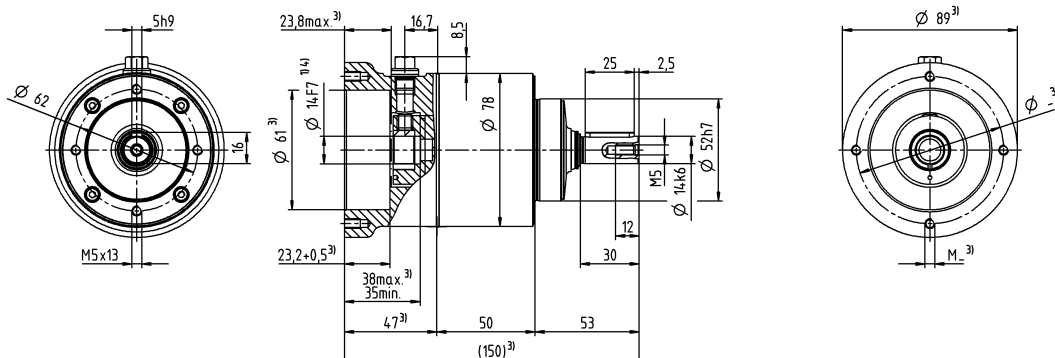

2-stage



up to 14⁴⁾ (C)⁵⁾
clamping hub
diameter

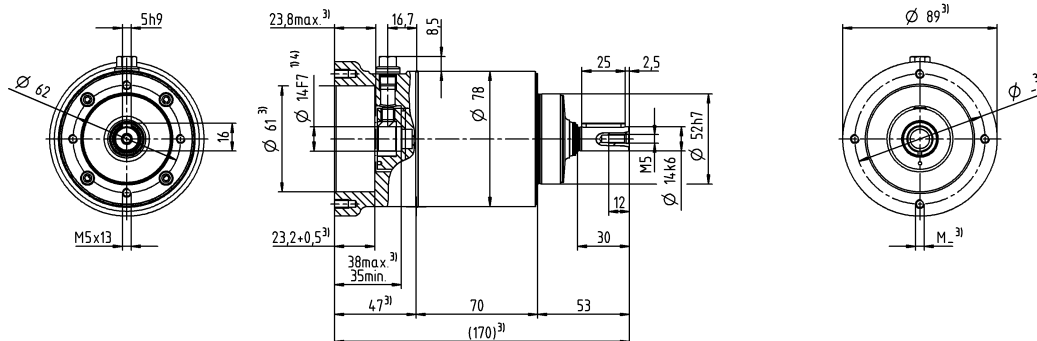

Motor shaft diameter [mm]

Other output variants

Smooth shaft

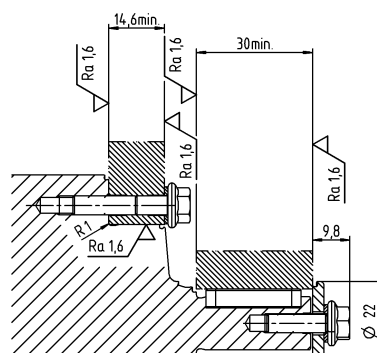

Mounting accessories:
Mounting kit comprising stainless steel screws, washers,
seals and O-rings available as an option.

Non-tolerated dimensions are nominal dimensions
¹⁾ Check motor shaft fit
²⁾ Min. / Max. permissible motor shaft length
 Longer motor shafts are possible, please contact alpha
³⁾ The dimensions depend on the motor
⁴⁾ Smaller motor shaft diameter is compensated
 by a bushing with a minimum thickness of 1 mm
⁵⁾ Standard clamping hub diameter

HDV 025 MF 1-/2-stage

				1-stage				2-stage							
Ratio		i		4	5	7	10	16	20	25	35	50	70	100	
Max. torque ^{a) b) e)}		T_{2a}	Nm	128	128	128	115	128	128	128	128	128	128	115	
			in.lb	1133	1133	1133	1018	1133	1133	1133	1133	1133	1133	1018	
Max. acceleration torque ^{a)} (max. 1000 cycles per hour)		T_{2B}	Nm	80	80	80	72	80	80	80	80	80	80	72	
			in.lb	708	708	708	637	708	708	708	708	708	708	637	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)		T_{2Not}	Nm	190	190	190	190	190	190	190	190	190	190	190	
			in.lb	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	
Permitted average input speed ^{d)} (at n_i =3000 rpm and 20 °C ambient temperature)		n_{1N}	rpm	2700	2700	2700	2700	3400	3400	3400	3400	3400	3400	3400	
Max. input speed		n_{1Max}	rpm	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000	
Mean no load running torque ^{b)} (at n_i =3000 rpm and 20 °C gearbox temperature)		T_{012}	Nm	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	
			in.lb	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7	
Max. backlash		j_t	arcmin	≤ 10				≤ 15							
Torsional rigidity ^{b)}		C_{t21}	Nm/arcmin	7.5	7.5	7.5	5.5	7.5	7.5	7.5	7.5	7.5	7.5	5.5	
			in.lb/arcmin	66	66	66	49	66	66	66	66	66	66	49	
Max. axial force ^{c)} (Standard / HIGH FORCES)		F_{2AMax}	N	500 / 1500				500 / 1500							
			lb _f	113 / 338				113 / 338							
Max. lateral force ^{c)} (Standard / HIGH FORCES)		F_{2QMMax}	N	500 / 2500				500 / 2500							
			lb _f	113 / 563				113 / 563							
Max. tilting moment (Standard / HIGH FORCES)		M_{2KMax}	Nm	31 / 185				31 / 185							
			in.lb	274 / 1637				274 / 1637							
Efficiency at full load		η	%	97				95							
Service life		L_h	h	> 20000				> 20000							
Weight (incl. standard adapter plate)		m	kg	5.2				6.5							
			lb _m	11				14							
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)		L_{PA}	dB(A)	≤ 63				≤ 63							
Max. permitted housing temperature			°C	+90				+90							
			°F	+194				+194							
Ambient temperature			°C	–25 to +40				–25 to +40							
			°F	–13 to +104				–13 to +104							
Lubrication			Lubricated for life												
Direction of rotation			In- and output same direction												
Protection class			IP 69X												
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	E	19	J_1	kgcm ²	0.63	0.54	0.52	0.46	0.6	0.52	0.54	0.5	0.52	0.52	0.46
				10 ⁻³ in.lb.s ²	0.56	0.48	0.46	0.41	0.53	0.46	0.48	0.44	0.46	0.46	0.41

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter


^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft


1-stage

up to 19⁴⁾ (E)⁵⁾
clamping hub
diameter

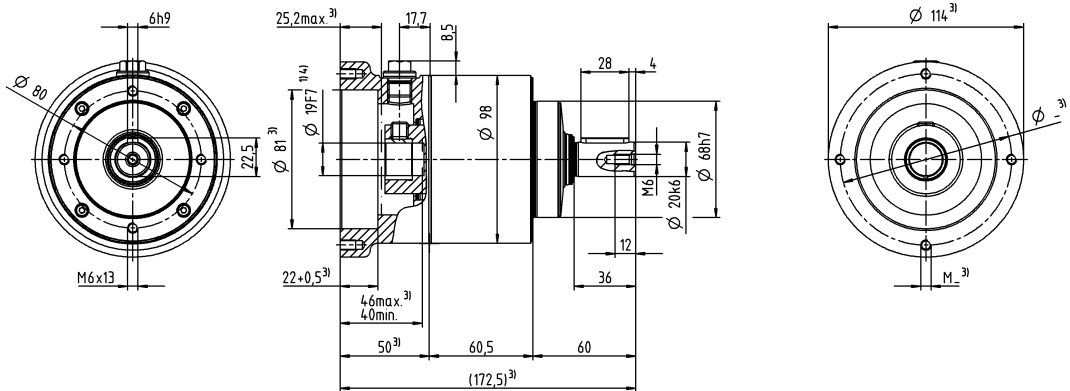



2-stage

up to 19⁴⁾ (E)⁵⁾
clamping hub
diameter

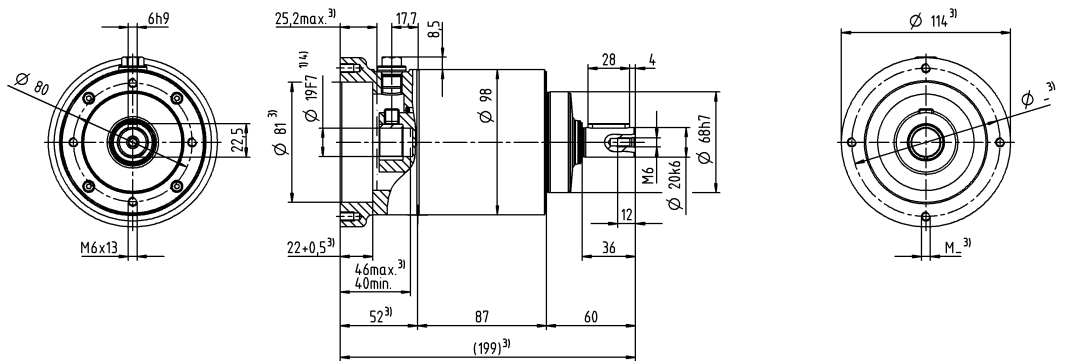

Other output variants

Smooth shaft

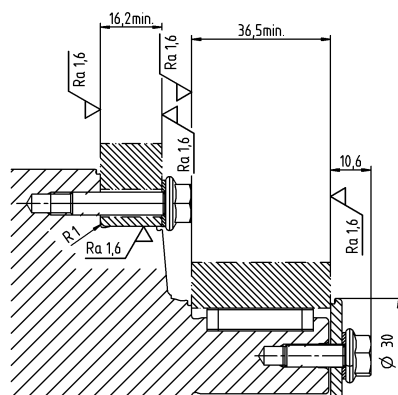

Mounting accessories:

Mounting kit comprising stainless steel screws, washers, seals and O-rings available as an option.

Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

HDV 035 MF 1-/2-stage

				1-stage				2-stage							
Ratio	i			4	5	7	10	16	20	25	35	50	70	100	
Max. torque ^{a) b) e)}	T_{2a}		Nm	320	320	320	288	320	320	320	320	320	320	288	
			in.lb	2832	2832	2832	2549	2832	2832	2832	2832	2832	2832	2549	
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}		Nm	200	200	200	180	200	200	200	200	200	200	180	
			in.lb	1770	1770	1770	1593	1770	1770	1770	1770	1770	1770	1593	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}		Nm	480	480	480	480	480	480	480	480	480	480	480	
			in.lb	4248	4248	4248	4248	4248	4248	4248	4248	4248	4248	4248	
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}		rpm	2000	2000	2000	2000	2600	2600	2600	2600	2600	2600	2600	
Max. input speed	n_{1Max}		rpm	4800	4800	4800	4800	4800	4800	4800	4800	4800	4800	4800	
Mean no load running torque ^{b)} (at n_1 =3000 rpm and 20 °C gearbox temperature)	T_{012}		Nm	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	
			in.lb	4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4	
Max. backlash	j_t		arcmin	≤ 10				≤ 15							
Torsional rigidity ^{b)}	C_{t21}		Nm/arcmin	24	24	24	24	24	24	24	24	24	24	24	
			in.lb/arcmin	212	212	212	212	212	212	212	212	212	212	212	
Max. axial force ^{c)} (Standard / HIGH FORCES)	F_{2AMax}		N	1700 / 3000				1700 / 3000							
			lb _f	383 / 675				383 / 675							
Max. lateral force ^{c)} (Standard / HIGH FORCES)	F_{2QMax}		N	1200 / 4250				1200 / 4250							
			lb _f	270 / 956				270 / 956							
Max. tilting moment (Standard / HIGH FORCES)	M_{2KMax}		Nm	95 / 407				95 / 407							
			in.lb	841 / 3602				841 / 3602							
Efficiency at full load	η		%	97				95							
Service life	L_h		h	> 20000				> 20000							
Weight (incl. standard adapter plate)	m		kg	13.6				16.6							
			lb _m	30				37							
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}		dB(A)	≤ 68				≤ 68							
Max. permitted housing temperature			°C	+90				+90							
			°F	+194				+194							
Ambient temperature			°C	–25 to +40				–25 to +40							
			°F	–13 to +104				–13 to +104							
Lubrication			Lubricated for life												
Direction of rotation			In- and output same direction												
Protection class			IP 69X												
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	G	24	J_1	kgcm ²	2.6	2.3	2	1.8	2.3	2.1	2.1	1.9	1.8	1.8	1.8
				10 ⁻³ in.lb.s ²	2.3	2	1.8	1.6	2	1.9	1.9	1.7	1.6	1.6	1.6

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter


^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft



1-stage

up to 24⁴⁾ (G)⁵⁾
clamping hub
diameter

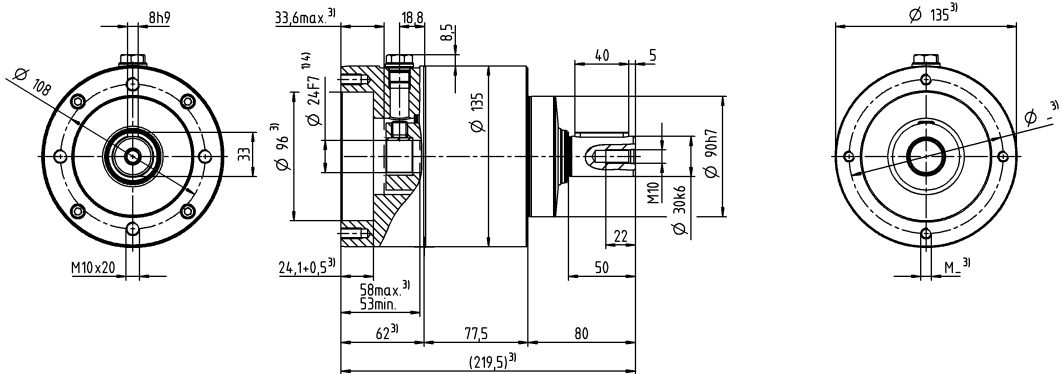


2-stage

up to 24⁴⁾ (G)⁵⁾
clamping hub
diameter

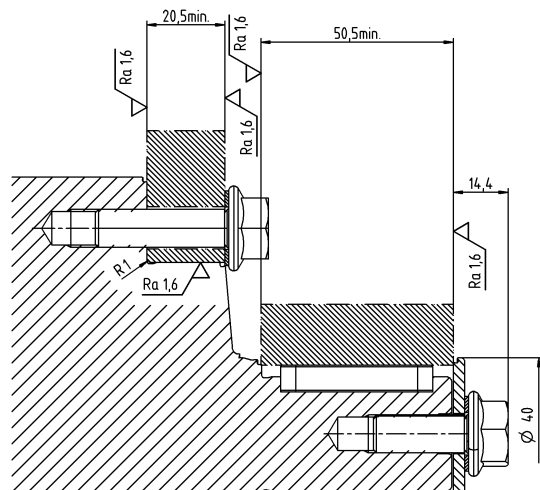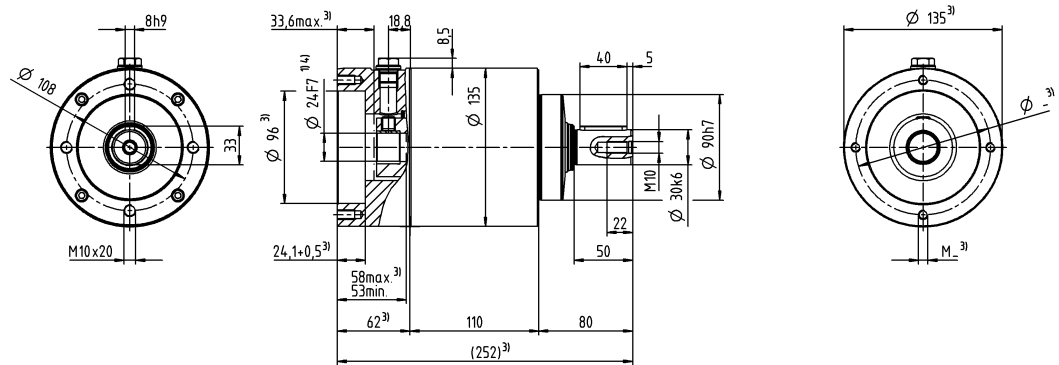

Other output variants

Smooth shaft



Mounting accessories:

Mounting kit comprising stainless steel screws, washers, seals and O-rings available as an option.

Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

Basic Line gearbox overview



Product type		CP	CPS	CPK	CPSK	CVH	CVS
Version		MF	MF	MF	MF	MF / MT	MF / MT
Catalog pages		22	40	56	74	92	98
Ratio ^{a)}	min. $i =$	3	3	3	3	7	7
	max. $i =$	100	100	100	100	40	40
Max. torsional backlash [arcmin] ^{c)}	Standard	≤ 12	≤ 12	≤ 13	≤ 15	≤ 15	≤ 15
	Reduced	–	–	–	–	–	–
Output type							
Smooth shaft		x	x	x	x	–	x
Shaft with key ^{d)}		x	x	x	x	–	x
Splined shaft (DIN 5480)		–	–	–	–	–	–
Blind hollow shaft		–	–	–	–	–	–
Hollow shaft interface		–	–	–	–	x	–
Keyed hollow shaft		–	–	–	–	x	–
Flanged hollow shaft		–	–	–	–	–	–
Flange		–	–	–	–	–	–
System output		–	–	–	–	–	–
Output on both sides		–	–	–	–	x	x
Input type							
Motor-mounted		x	x	x	x	x	x
Self-contained version ^{b)}		–	–	–	–	–	–
Characteristic							
Flange with slotted holes		–	–	–	–	–	–
ATEX ^{a)}		–	–	–	–	–	–
Food-grade lubrication ^{a) b)}		x	x	x	x	x	x
Corrosion resistant ^{a) b)}		–	–	–	–	–	–
Optimized mass inertia ^{a)}		–	–	–	–	–	–
System solutions							
Linear system (rack/pinion)		–	–	–	–	–	–
Servo actuator		–	–	–	–	–	–
Accessories (please refer to the product pages for further options)							
Coupling		x	x	x	x	–	x
Shrink disc		–	–	–	–	x	–
Mounting ring		–	–	–	–	–	–

^{a)} Power reduction: technical data available on request

^{b)} Please contact WITTENSTEIN alpha

^{c)} In relation to reference sizes

^{d)} Power reduction: Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

Value Line gearbox overview



Product type		NP	NPL	NPS	NPT	NPR	NPK	NPLK	NPSK	NPTK	NPRK	NVH	NVS	HDV
Version		MF / MA	MF / MA	MF / MA	MF / MA	MF / MA	MF	MF	MF	MF	MF	MF	MF	MF / MT
Catalog pages		110	134	154	174	198	222	238	252	266	282	300	306	316
Ratio ^{a)}	min. $i =$	3	3	3	3	3	3	3	3	3	3	4	4	4
	max. $i =$	100	100	100	100	100	100	100	100	100	100	400	400	400
Max. torsional backlash [arcmin] ^{c)}	Standard	≤ 8	≤ 8	≤ 8	≤ 8	≤ 8	≤ 11	≤ 11	≤ 11	≤ 11	≤ 11	≤ 6	≤ 6	≤ 10
	Reduced	–	–	–	–	–	–	–	–	–	–	–	–	–
Output type														
Smooth shaft		x	x	x	–	x	x	x	x	–	x	–	x	x
Shaft with key ^{d)}		x	x	x	–	x	x	x	x	–	x	–	x	x
Splined shaft (DIN 5480)		–	x	x	–	x	–	x	x	–	x	–	–	–
Blind hollow shaft		–	–	–	–	–	–	–	–	–	–	–	–	–
Hollow shaft interface		–	–	–	–	–	–	–	–	–	–	x	–	–
Keyed hollow shaft		–	–	–	–	–	–	–	–	–	–	x	–	–
Flanged hollow shaft		–	–	–	–	–	–	–	–	–	–	–	–	–
Flange		–	–	–	x	–	–	–	–	x	–	–	–	–
System output		–	–	–	–	–	–	–	–	–	–	–	–	–
Output on both sides		–	–	–	–	–	–	–	–	–	–	x	x	–
Input type														
Motor-mounted		x	x	x	x	x	x	x	x	x	x	x	x	x
Self-contained version ^{b)}		–	–	–	–	–	–	–	–	–	–	–	–	–
Characteristic														
Flange with slotted holes		–	–	–	–	x	–	–	–	–	x	–	–	–
ATEX ^{a)}		–	–	–	–	–	–	–	–	–	–	–	–	–
Food-grade lubrication ^{a) b)}		x	x	x	x	x	x	x	x	x	x	x	x	x
Corrosion resistant ^{a) b)}		–	–	–	–	–	–	–	–	–	–	x	x	x
Optimized mass inertia ^{a)}		–	–	–	–	–	–	–	–	–	–	–	–	–
System solutions														
Linear system (rack/pinion)		x	x	x	–	x	x	x	x	–	x	–	x	–
Servo actuator		–	–	–	–	–	–	–	–	–	–	–	–	x
Accessories (please refer to the product pages for further options)														
Coupling		x	x	x	–	x	x	x	x	–	x	–	x	–
Shrink disc		–	–	–	–	–	–	–	–	–	–	x	–	–
Mounting ring		–	–	–	–	–	–	–	–	–	–	–	–	–

^{a)} Power reduction: technical data available on request

^{b)} Please contact WITTENSTEIN alpha

^{c)} In relation to reference sizes

^{d)} Power reduction: Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

Advanced Line gearbox overview



Product type		SP ⁺	SP ⁺ HIGH SPEED	SP ⁺ HIGH SPEED friction optimized	TP ⁺	TP ⁺ HIGH TORQUE	HG ⁺	SK ⁺	SPK ⁺
Version		MF	MC	MC-L	MF	MA	MF	MF	MF
Ratio ^{c)}	min. $i =$	3	3	3	4	22	3	3	12
	max. $i =$	100	100	10	100	302.5	100	100	10000
Max. torsional backlash [arcmin] ^{c)}	Standard	≤ 3	≤ 4	≤ 4	≤ 3	≤ 1	≤ 4	≤ 4	≤ 4
	Reduced	≤ 1	≤ 2	≤ 2	≤ 1	–	–	–	≤ 2
Output type									
Smooth shaft		x	x	x	–	–	–	x	x
Shaft with key ^{d)}		x	x	x	–	–	–	x	x
Splined shaft (DIN 5480)		x	x	x	–	–	–	x	x
Blind hollow shaft		x	x	x	–	–	–	–	x
Hollow shaft interface		–	–	–	–	–	x	–	–
Keyed hollow shaft		–	–	–	–	–	–	–	–
Flanged hollow shaft		–	–	–	–	–	–	–	–
Flange		–	–	–	x	x	–	–	–
System output		–	–	–	x	x	–	–	–
Output on both sides		–	–	–	–	–	x	x	x
Input type									
Motor-mounted		x	x	x	x	x	x	x	x
Self-contained version ^{b)}		x	–	–	x	–	–	–	–
Characteristic									
Flange with slotted holes		x	–	–	–	–	–	–	–
ATEX ^{a)}		x	x	–	–	–	x	x	–
Food-grade lubrication ^{a) b)}		x	x	x	x	x	x	x	x
Corrosion resistant ^{a) b)}		x	x	x	x	x	x	x	x
Optimized mass inertia ^{a)}		x	x	x	x	x	–	–	–
System solutions									
Linear system (rack/pinion)		x	x	–	x	x	–	x	x
Servo actuator		x	–	–	x	x	–	–	–
Accessories (please refer to the product pages for further options)									
Coupling		x	x	x	x	x	–	x	x
Shrink disc		x	x	x	–	–	x	–	x
Mounting ring		–	–	–	x	x	–	–	–

^{a)} Power reduction: technical data available on request

^{b)} Please contact WITTENSTEIN alpha

^{c)} In relation to reference sizes

^{d)} Power reduction: Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com



TK ⁺	TPK ⁺	TPK ⁺ HIGH TORQUE	SC ⁺	SPC ⁺	TPC ⁺	VH ⁺	VS ⁺	VT ⁺	DP ⁺	HDP ⁺
MF	MF	MA	MF	MF	MF	MF	MF	MF	MF / MA	MA
3	12	66	1	4	4	4	4	4	16	22
100	10000	5500	2	20	20	400	400	400	55	55
≤ 4	≤ 4	≤ 1.3	≤ 4	≤ 4	≤ 4	≤ 3	≤ 3	≤ 3	≤ 3	≤ 1
–	≤ 2	–	–	≤ 2	≤ 2	≤ 2	≤ 2	≤ 2	≤ 1	–

–	–	–	x	x	–	–	x	–	–	–
–	–	–	x	x	–	–	x	–	–	–
–	–	–	–	x	–	–	x	–	–	–
–	–	–	–	x	–	–	–	–	–	–
–	–	–	–	–	–	x	–	–	–	–
–	–	–	–	–	–	x	–	–	–	–
x	–	–	–	–	–	–	–	x	–	–
–	x	x	–	–	x	–	–	–	x	x
–	x	x	–	–	x	–	–	–	–	–
x	x	x	–	–	–	x	x	–	–	–

x	x	x	x	x	x	x	x	x	x	x
–	–	–	–	–	–	–	–	–	–	–

–	–	–	–	–	–	–	–	–	–	–
x	–	–	–	–	–	–	–	–	–	–
x	x	x	x	x	x	x	x	x	x	x
x	x	x	–	–	–	x	x	x	x	x
–	–	–	–	–	–	–	–	–	x	x

x	x	x	x	x	x	–	x	x	–	–
–	–	–	–	–	–	–	–	–	–	–

x	x	x	x	x	x	–	x	x	–	–
–	–	–	–	x	–	x	–	–	–	–
–	–	–	–	–	–	–	–	–	x	–

Premium Line gearbox overview



Product type		XP+	RP+	XPK+	RPK+	XPC+	RPC+
Version		MF / MC	MF / MA	MF	MA	MF	MA
Ratio ^{c)}	min. $i =$	3	22	12	48	4	22
	max. $i =$	100	220	1000	5500	20	55
Max. torsional backlash [arcmin] ^{c)}	Standard	≤ 3	≤ 1	≤ 4	≤ 1.3	≤ 4	≤ 1.3
	Reduced	≤ 1	–	≤ 2	–	≤ 2	–
Output type							
Smooth shaft		x	–	x	–	x	–
Shaft with key ^{d)}		x	–	x	–	x	–
Splined shaft (DIN 5480)		x	–	x	–	x	–
Blind hollow shaft		x	–	x	–	x	–
Hollow shaft interface		–	–	–	–	–	–
Keyed hollow shaft		–	–	–	–	–	–
Flanged hollow shaft		–	–	–	–	–	–
Flange		–	x	–	x	–	x
System output		x	x	x	x	x	x
Output on both sides		–	–	–	–	–	–
Input type							
Motor-mounted		x	x	x	x	x	x
Self-contained version ^{b)}		x	–	–	–	–	–
Characteristic							
Flange with slotted holes		x	x	x	x	x	x
ATEX ^{a)}		–	–	–	–	–	–
Food-grade lubrication ^{a) b)}		x	x	x	x	x	x
Corrosion resistant ^{a) b)}		–	–	–	–	–	–
Optimized mass inertia ^{a)}		x	x	–	–	–	–
System solutions							
Linear system (rack/pinion)		x	x	x	x	x	x
Servo actuator		x	x	–	–	–	–
Accessories (please refer to the product pages for further options)							
Coupling		x	–	x	–	x	–
Shrink disc		x	–	x	–	x	–
Mounting ring		–	–	–	–	–	–

^{a)} Power reduction: technical data available on request

^{b)} Please contact WITTENSTEIN alpha

^{c)} In relation to reference sizes

^{d)} Power reduction: Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

Servo actuator overview



Product type		PBG	PAG	PHG	RPM ^{a)}	TPM ⁺ DYNAMIC	TPM ⁺ HIGH TORQUE	TPM ⁺ POWER
Version		Standard	Standard	Standard	Customer specific	Standard	Standard	Standard
Ratio ^{c)}	min. $i =$	16	16	16	22	16	22	4
	max. $i =$	100	100	100	220	91	220	100
Max. torsional backlash ^{c)} [arcmin]	Standard	≤ 6	≤ 3	≤ 3	≤ 1	≤ 3	≤ 1	≤ 3
	Reduced	≤ 3	≤ 1	≤ 1	–	≤ 1	≤ 1	≤ 1
Output shape								
Smooth shaft		x	–	x	–	–	–	–
Shaft with key ^{d)}		x	–	x	–	–	–	–
Splined shaft (DIN 5480)		x	–	x	–	–	–	–
Blind hollow shaft		–	–	–	–	–	–	–
Hollow shaft interface		–	–	–	–	–	–	–
Keyed hollow shaft		–	–	–	–	–	–	–
Flanged hollow shaft		–	–	–	–	–	–	–
Flange		–	x	–	x	x	x	x
System output		–	x	x	x	x	x	x
Output on both sides		–	–	–	–	–	–	–
Input type								
Motor-mounted		–	–	–	–	–	–	–
Self-contained version		–	–	–	–	–	–	–
Characteristic								
Flange with slotted holes		x	–	x	x	–	–	–
ATEX ^{a)}		–	–	–	–	–	–	–
Food-grade lubrication ^{a) b)}		x	x	x	x	x	x	x
Corrosion resistant ^{a) b)}		–	–	–	–	x	x	x
Optimized mass Inertia ^{a)}		–	–	–	–	–	–	–
System solutions								
Linear system (rack / pinion)		x	x	x	x	x	x	x
Accessories (please refer to the product pages for further options)								
Coupling		x	x	x	–	x	x	x
Shrink disc		x	–	–	–	–	–	–
Power cable, signal cable, hybrid cable		x	x	x	x	x	x	x

^{a)} Power reduction: technical data available on request

^{b)} Please contact WITTENSTEIN alpha

^{c)} In relation to reference sizes

^{d)} Power reduction: Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

Value Linear Systems

System solutions count


The Value Linear Systems are adapted to linear applications in the Value Segment with comparatively low requirements in terms of smooth running, positioning accuracy, and feed force. The systems are typically used in woodworking machinery, plasma cutting systems, and automation.

High-end technology – the R-flange

The R-flange adapted from the Premium Segment allows greater design freedom in the Value Segment. The gearbox flange with integrated slots enables easy positioning of the gearbox with mounted pinion in relation to the rack. Cumber-
some solutions with complicated designs featuring intermediate plates are therefore not required.

The alpha preferred Linear System

Our preferred Linear Systems in the Value Segment are the ideal combination of gearbox, pinion, rack, and lubrication system. The systems have been optimized to achieve the required feed force, feed speed, stiffness, and degree of utilization of the individual components. They cover a feed force range of up to 8,000 N. Feed speeds of up to 400 m/min are possible.

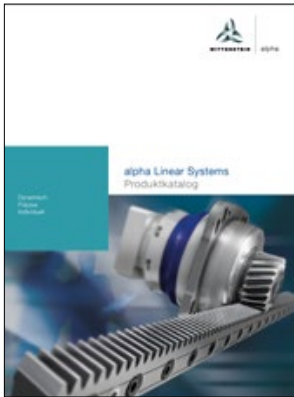

Refer to our alpha Linear Systems catalog and the website for more information on the Value, Advanced, and Premium Linear System.

www.wittenstein-alpha.com/linear-systems

For a wide range of applications

alpha Linear Systems are suitable for a wide range of applications and industries. New standards are being set in the following areas:


- Smooth running
- Positioning accuracy
- Feed force
- Power density
- Rigidity
- Ease of installation
- Structural design
- Scalability

Paired with a comprehensive range of services, we support you from the constructional draft to sizing, assembly, and commissioning. We will also ensure a consistent supply of spare parts.

The benefits of the alpha Linear Systems for you

- Perfectly matched components
- Maximum efficiency and power density
- Exceptional Linear System rigidity for even greater dynamics and precision
- Simple mounting and perfect integration in the drive train
- Available in different sizes, power categories, and segments

Consultation and quality – everything from a single source!

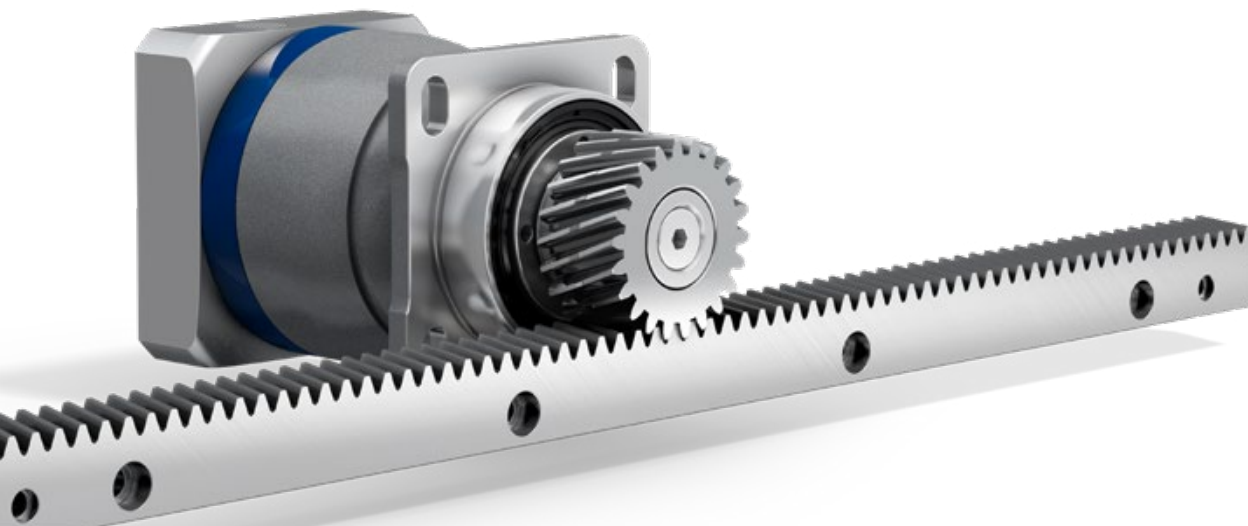

premo – servo actuators by WITTENSTEIN alpha

premo is the new, powerful servo actuator platform that combines absolute precision with perfect movement. The central idea behind this first fully scalable servo actuator platform is uncompromising flexibility from the viewpoint of the user: motors and gearboxes with application-related graduated performance characteristics can be configured modularly into individual servo actuators. The result is a highly versatile modular system with customizable power, designed for a wide range of applications. The core of the servo actuator is a torsionally rigid precision gearbox with low backlash and excellent torque density combined with the equally powerful, permanent magnet servo motor with an evenly distributed winding that guarantees low cogging and high speed constancy.

Typical areas of application and industry solutions

- Delta robot (axes 1–3, swivel axis)
- Handling gantry (Z-axis, swivel/rotating axis)
- Machine tool milling (rotating axes A–C, tool changer)
- Fill and seal machine (incl. jaw stroke, sealing jaw, blade)
- Folding carton packaging (incl. assembly/folding, filling valve)
- Plastic thermoform (tool axis)


premo application examples

premo PRODUCT HIGHLIGHTS


- Optimized power density for greater energy efficiency and productivity
- Flexible mechanical and electrical interfaces for high scalability
- Individual upgrading of the basic configuration through a variety of options





Handling gantry
premo SP Line



Fill and seal machine
premo TP Line



Milling head of a
machining center
premo XP Line

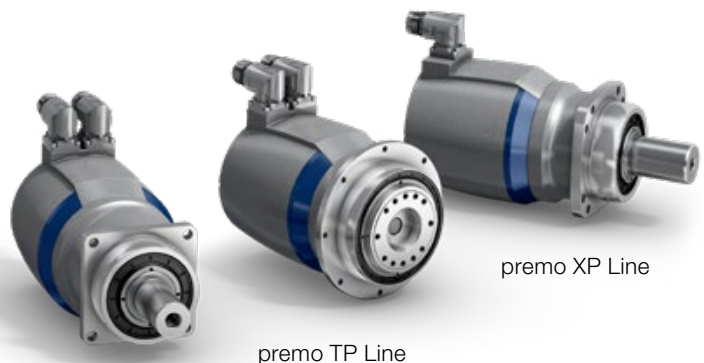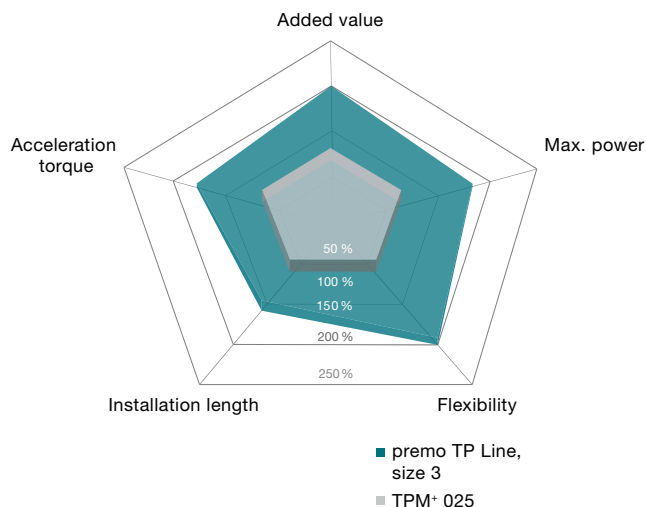

premo SP Line

premo TP Line

premo XP Line

Accessories – smart addition of intelligent performance


In addition to gearboxes, servo actuators, and linear systems, we offer our customers an extensive portfolio of matching accessories.

Shrink discs and couplings are primarily used in the Basic and Value Line. Shrink discs are mainly

used in applications with hollow shafts and couplings in shaft connections.


Perfectly match with the gearbox, they meet the expectations of customers.

Gearboxes, accessories, and consultation from a single source

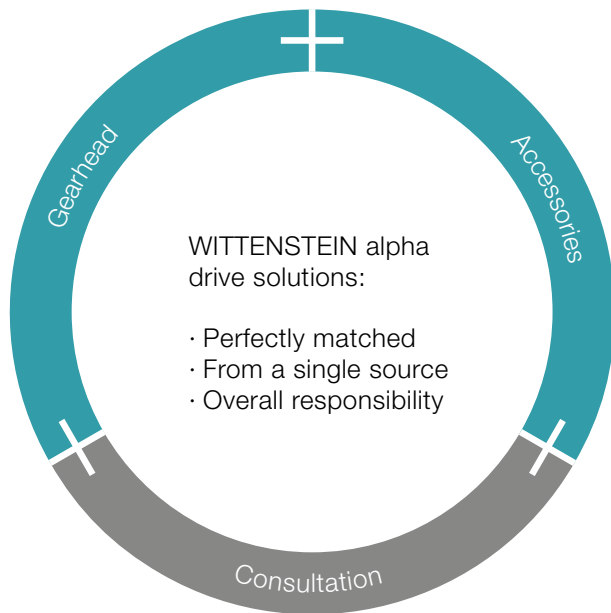

Optimization of your value creation chain

Use the combination of gearboxes and accessories in a complete package to streamline your internal processes.

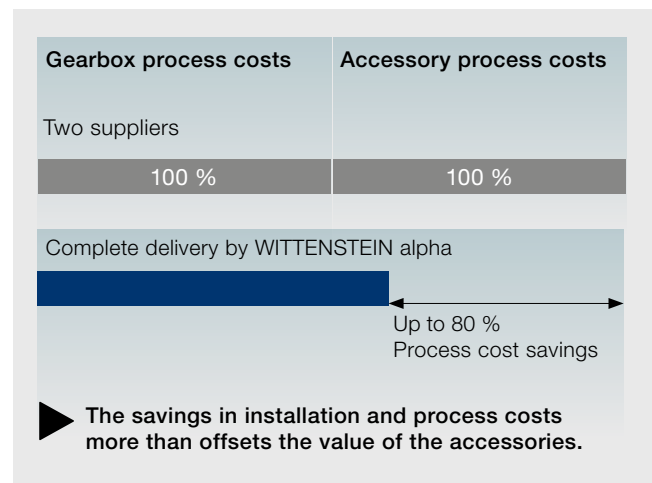

Shrink discs

Shrink discs are frictional hub-shaft connections. Together with our hollow shaft or blind hollow shaft gearboxes for direct mounting to load shafts, machine designs with a minimal installation space can be realized.

The benefits:

- Simple assembly and disassembly
- Corrosion-resistant stainless steel version
- Maximum safety during the transmission of the emergency stop torques

Preferred shrink disc series

Provided it is possible to mount a shrink disc, you will find the matching shrink discs on the product page for your selected gearbox. To view more nickel-plated, stainless steel, and other shrink discs as well as all the relevant technical data and dimensions, visit our homepage

www.wittenstein-alpha.com




Couplings

Our innovative couplings, which are used in various drive technology sectors, ensure efficiency and process reliability in the applications.

Our couplings have the following properties:

- Completely backlash-free torque transmission
- Maintenance free
- Durable
- Compensation of shaft misalignments (axial, angular, lateral)

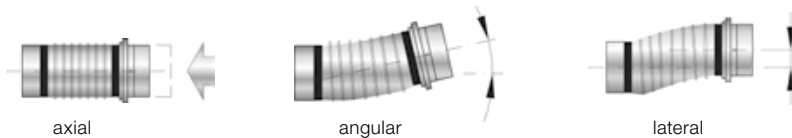


Metal bellows coupling

- High torsional rigidity
- Minimal reset forces
- High true-running accuracy
- Corrosion resistant version available as an option (BC2, BC3, BCT)
- Large temperature range
–30 °C to +300 °C
- Preferred coupling for alpha Advanced Line and alpha Premium Line

alpha Premium

alpha Advanced



Elastomer coupling

- Choice of torsional rigid/damping
- Compact, plug-in design
- Extremely easy assembly
- Temperature range –30 °C to +120 °C
- Preferred coupling for alpha Basic Line and alpha Value Line

alpha Value

alpha Basic



Torque limiter

- Torque infinitely adjustable
- Easy to assemble
- Precise repeatability
- Precise, preset overload protection (switch-off in 1–3 ms)

Suitable for all alpha gearbox series

Preferred coupling series

The technical dimensional sheets for the gearboxes include a preselection of couplings. These are based on the maximum transmittable torque of the gearbox. Standard industrial conditions for the number of cycles (1,000/h) and ambient temperature were adopted.

Please note that the coupling load is based on the torque the gearbox can transmit and not the torque in your application. For a detailed sizing we recommend using our cymex®5 design software.

You can find detailed information about our couplings at www.wittenstein-alpha.com

Support at each interaction stage

With the WITTENSTEIN alpha service concept, we are also setting new standards in the field of customer support.

DESIGN



We offer the right sizing methodology for every requirement. Whether easy downloading of CAD data, quick and easy calculation, or precise sizing of the drive train.

STARTUP



Our service experts are happy to support you in the installation and startup of complex mechatronic systems, guaranteeing maximum availability of your plant.

SERVICING



WITTENSTEIN alpha guarantees fast repairs of the highest quality and precision.

In addition, we will provide you with information about various measurements, material analyses, and condition monitoring inspections.

Consultation

- Personal contact on site
- Competent application calculations and drive sizing

Engineering

Catalog gearboxes:

- Advanced software tools for accurate calculation, simulation, and analysis of the drive train
- Optimization of your productivity

Special gearboxes:

- Development and production of customized gearboxes
- Gearing design and development
- Inquiries: sondergetriebe@wittenstein.de



CAD POINT
YOUR SMART CATALOG



SIZING ASSISTANT
YOUR GEARBOX WITHIN SECONDS



cymex[®] 5
CALCULATE ON THE BEST

See pages 12–15 for more information about the software tools

speedline[®] delivery

Tel. +49 7931 493-10444

- Delivery of standard product range in 24 or 48 hours ex works*
- Fast deliveries at short notice

Installation on site

- Professional installation
- Optimal application integration
- Introduction to the operation of the drive

Operating and installation instructions

- Detail description of how to use the product
- Installation and motor mounting videos

Pick-up & return service

- Minimization of downtimes
- Professional logistics organization
- Reduction of transport risks

* Non-binding delivery time depending on part availability

24 h service hotline

Tel. +49 7931 493-12900

Maintenance and inspection

- Documentation regarding condition and expected service life
- Customer-specific maintenance schedules

Repairs

- Repair to nominal condition
- Immediate response in time-critical situations

cymex[®] statistics

- Systematic field data acquisition
- Reliability calculations (MTBF)

Modernization

- Professional retrofitting
- Reliable compatibility testing of existing solutions



Individual training without limits

All delivered products are perfectly matched to your application environment and immediately 100 % operational.

Our service experts support you in the commissioning of complex mechatronic systems, guaranteeing maximum availability of your plant.

Product training

Greater knowledge enables greater achievement. We will be pleased to share our expert knowledge with you: Profit from our many years of experience and learn more about the product portfolio of WITTENSTEIN alpha.

Installation training

We offer you individual training courses on-site for your system application of selected linear axes as well as professional installation.

Sizing training

Become a design expert! We will provide you with training courses on our design software, adapted to your requirements. Whether for beginners or experts, for occasional or regular users – we adapt our training course to your wishes and requirements.

Service training

Participation in a service training course is a prerequisite for sourcing spare parts at the parts list level. We offer you training courses at our premises or on-site at your plant. Moreover, we regularly host maintenance workshops at which the participants are instructed in safe handling during mounting of the motor to the gearbox as well as the independent replacement of wearing parts and gearbox assemblies.

Global presence. Personal consultation.

No matter where you need us:

A comprehensive sales and service network provides quick availability and competent support worldwide.

24 h service hotline: +49 7931 493-12900



The WITTENSTEIN group – The company and its fields of business

With approximately 2,600 employees worldwide, WITTENSTEIN SE stands for innovation, precision and excellence in the world of mechatronic drive technology, both nationally and internationally. The group is active in six innovative fields of business.

Furthermore, WITTENSTEIN SE is represented by some 60 subsidiaries in around 40 countries in all important technology and sales markets worldwide.

Our fields of expertise

- Machine and plant construction
- Software development
- Aerospace
- Automotive & E-mobility
- Energy
- Oil & Gas Exploration
- Medical technology
- Measurement and testing technology
- Nanotechnology
- Simulation



WITTENSTEIN



WITTENSTEIN alpha GmbH
High-precision servo drives and linear systems



WITTENSTEIN motion control GmbH
Customized linear and rotary servo systems



WITTENSTEIN cyber motor GmbH
Highly dynamic servo motors and drive electronics



WITTENSTEIN aerospace & simulation GmbH
Mechatronic drive systems for aerospace & simulation





attocube systems AG
Nanoprecision drive and measurement
technology solutions

Sizing – Planetary / Bevel gearboxes

The following schematic shows the steps of the sizing of planetary and bevel gearboxes.
Please use cymex® - www.wittenstein-cymex.com for a detailed sizing.

Schematic cyclic operation **S5** and continuous operation **S1**

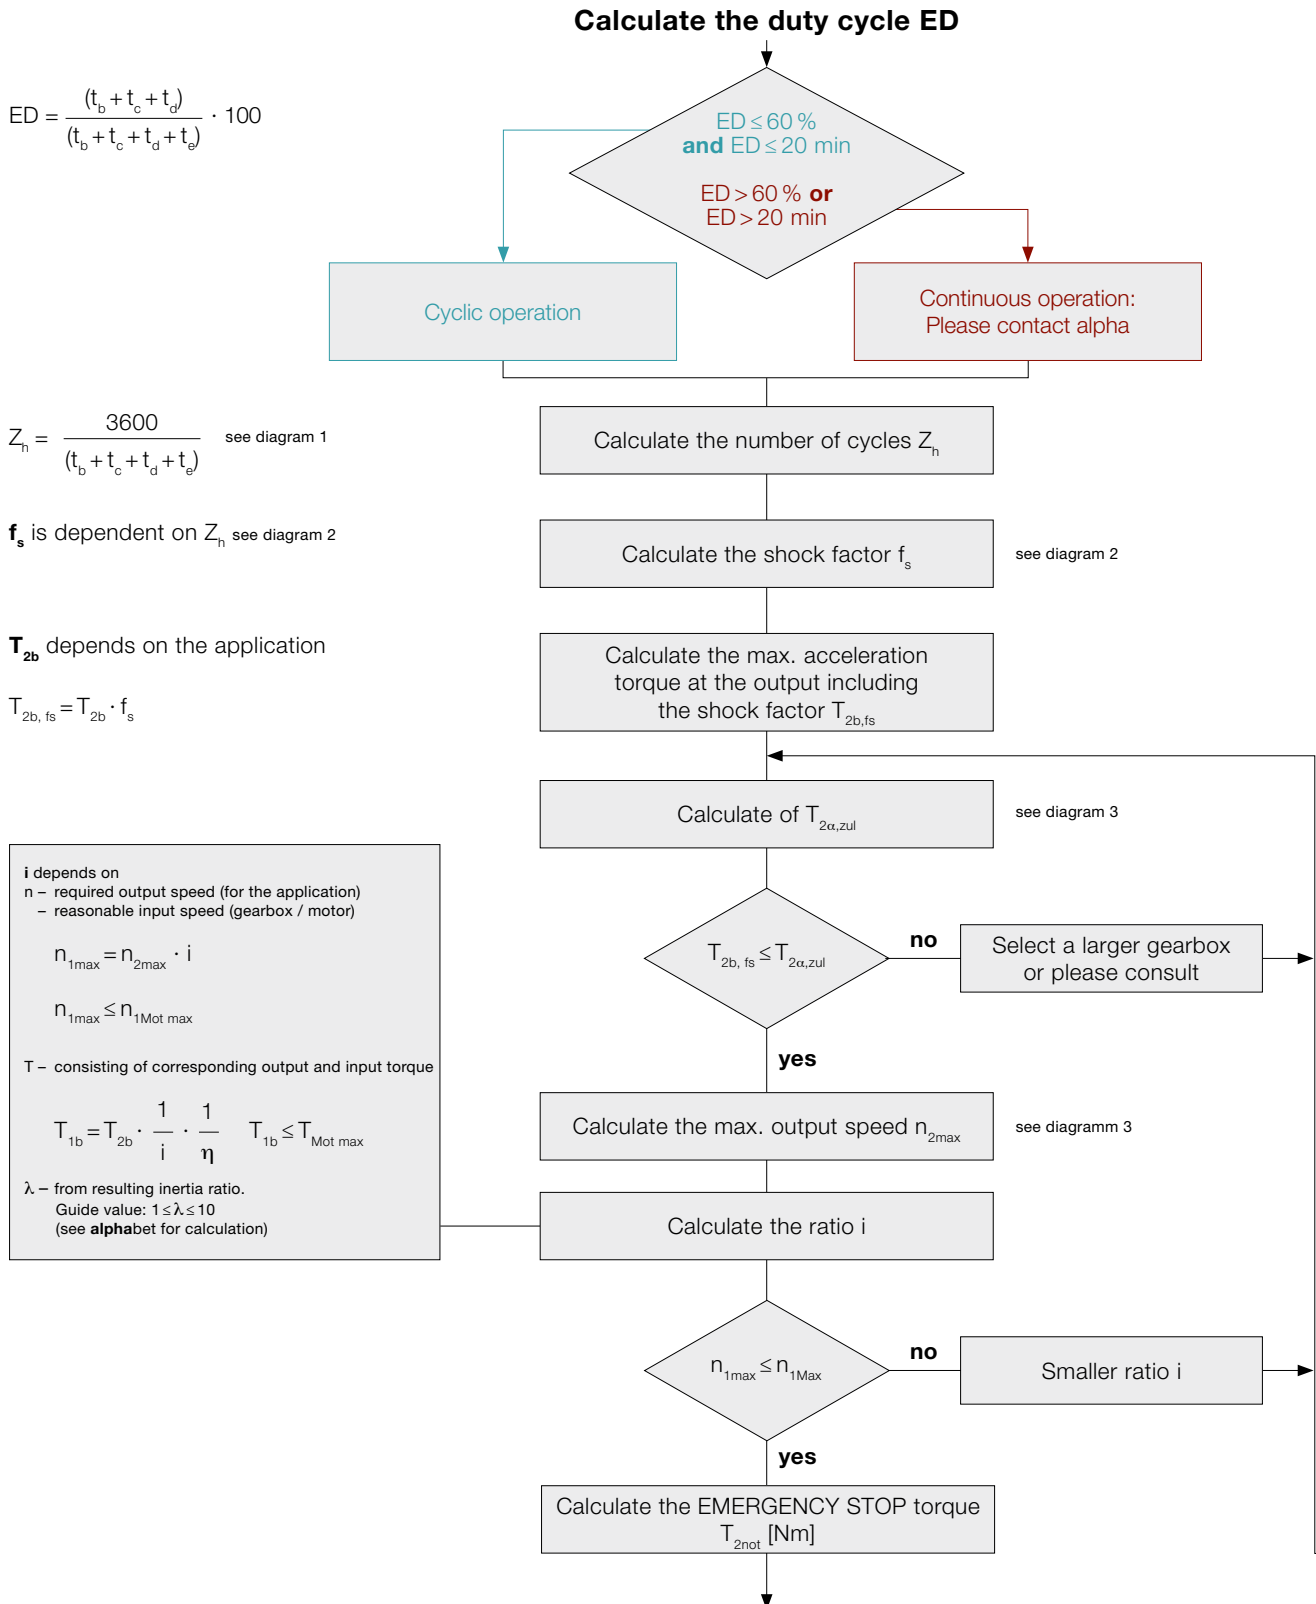

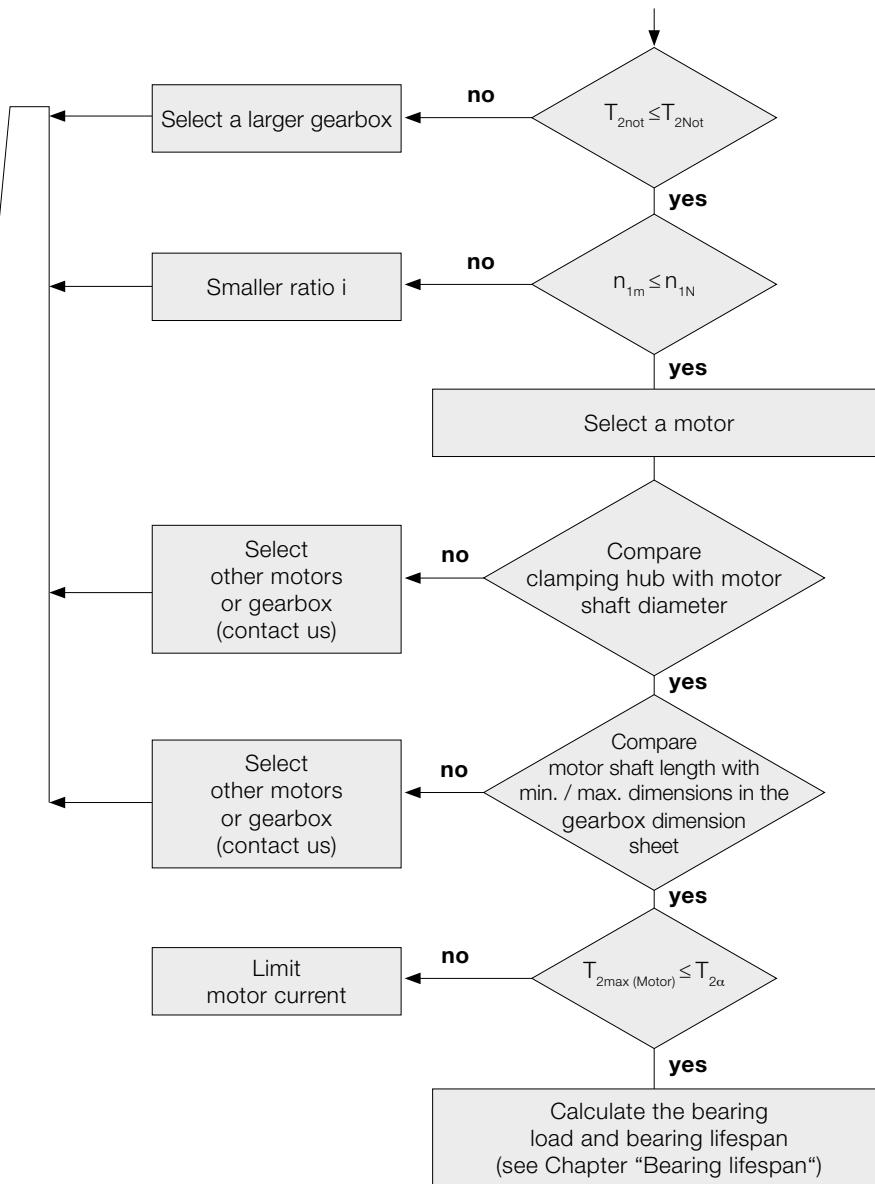

$$D_{W, Mot} \leq D_{clamping\ hub}$$

The motor shaft must be inserted far enough into the clamping hub.

The motor shaft must protrude far enough into the clamping hub without making contact.

The gearbox should not be damaged when the motor operates at full load, limit the motor current if necessary.

Diagram 1

Standard collective load at output. At input speeds up to rated speed n_{1N} or thermal speed limit n_{1T} , the temperature of the gearbox will not exceed 90 °C under average ambient conditions.




Diagram 2

Large number of cycles combined with short acceleration times may cause the drive train to vibrate. Use the shock factor f_s to include the resulting excess torque values in calculations.


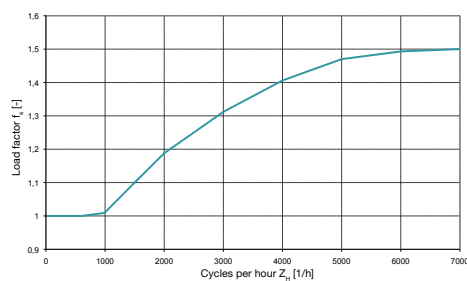


Diagram 3


The transmittable torque $T_{2u, per}$ of the gearbox is dependent on the number of output shaft revolutions. In the lower output shaft revolution range, the fatigue strength range of the toothing can be fully utilized up to the maximum value T_{2u} .

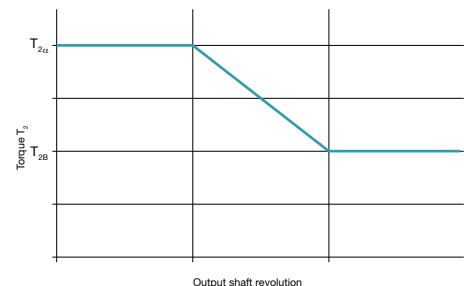

Sizing – Planetary / Bevel gearboxes

Please use cymex® - www.wittenstein-cymex.com for a detailed sizing.

Calculation bearing lifespan L_{h10}

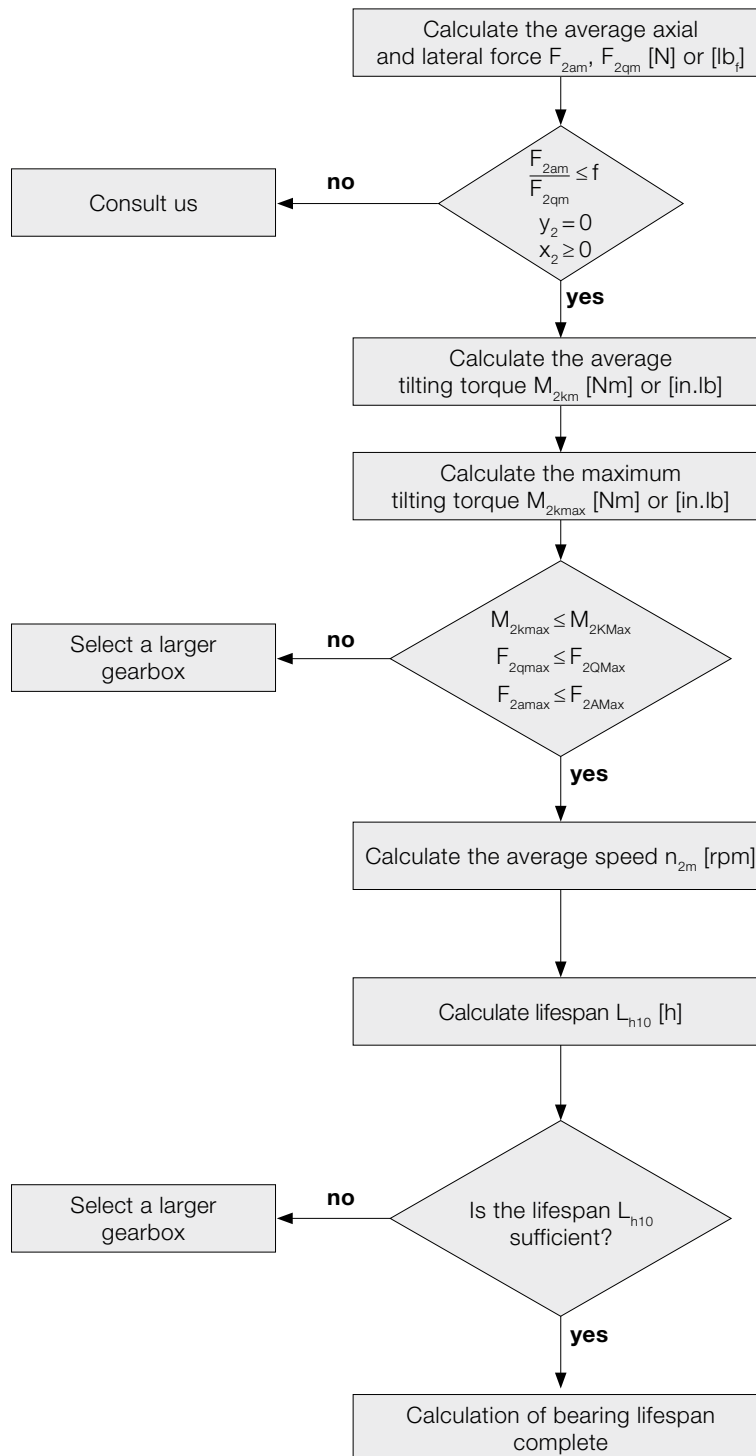

$$F_{2am} = \sqrt[3]{\frac{|n_{2b}| \cdot t_b \cdot |F_{2ab}|^3 + \dots + |n_{2n}| \cdot t_n \cdot |F_{2an}|^3}{|n_{2b}| \cdot t_b + \dots + |n_{2n}| \cdot t_n}}$$

$$F_{2qm} = \sqrt[3]{\frac{|n_{2b}| \cdot t_b \cdot |F_{2qb}|^3 + \dots + |n_{2n}| \cdot t_n \cdot |F_{2qn}|^3}{|n_{2b}| \cdot t_b + \dots + |n_{2n}| \cdot t_n}}$$

$$M_{2km} = \frac{F_{2am} \cdot y_2 + F_{2qm} \cdot (x_2 + z_2)^a}{W}$$

$$M_{2kmax} = \frac{F_{2amax} \cdot y_2 + F_{2qmax} \cdot (x_2 + z_2)^a}{W}$$

a) x, y, z in mm

$$n_{2m} = \frac{n_{2b} \cdot t_b + \dots + n_{2n} \cdot t_n}{t_b + \dots + t_n}$$

$$L_{h10} = \frac{16666}{n_{2m}} \cdot \left[\frac{K1_2}{M_{2km}} \right]^{p_2}$$

	metric
W	1000

	CP / CPS / NP / NPT / HDV CPK / CPSK / NPK / NPTK	NPL / NPS / NPR NPLK / NPSK / NPRK
f	0.24	0.4


CP / CPS CPK / CPSK			005	015	025	035	045
MF	z ₂	[mm]	12.4	19.3	27.7	31.5	47
		[in]	0.49	0.76	1.1	1.2	1.9
	K1 ₂	[Nm]	20	69	238	501	1512
		[in.lb]	177	610	2106	4433	13381
	p ₂		3	3	3	3	3

NP / NPK			005	015	025	035	045
MF / MA	z ₂	[mm]	20	28.5	31	40	47
		[in]	0.79	1.1	1.2	1.6	1.9
	K1 ₂	[Nm]	75	252	314	876	1728
		[in.lb]	663	2230	2778	7752	15292
	p ₂		3	3	3	3	3

NPT / NPTK			005	015	025	035	045
MF / MA	z ₂	[mm]	27.7	34.6	39.3	44.5	58.2
		[in]	1.1	1.4	1.6	1.8	2.3
	K1 ₂	[Nm]	136	211	310	628	995
		[in.lb]	1203	1867	2743	5557	8805
	p ₂		3	3	3	3	3

NPL / NPS / NPR NPLK / NPSK / NPRK			015	025	035	045
MF / MA	z ₂	[mm]	42.2	44.8	50.5	63
		[in]	1.7	1.8	2	2.5
	K1 ₂	[Nm]	795	1109	1894	3854
		[in.lb]	7035	9814	16761	34107
	p ₂		3.33	3.33	3.33	3.33

Example with output shaft and flange:

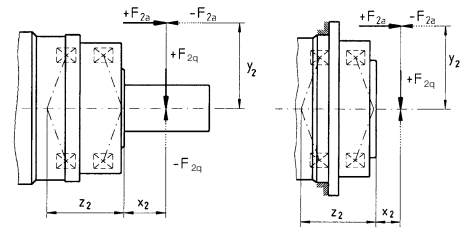

HDV			015	025	035
MF	z ₂	[mm]	41.7	45.65	57.25
		[in]	1.6	1.8	2.3
	K1 ₂	[Nm]	84	131	406
		[in.lb]	743	1159	3593
MT	z ₂	[mm]	53	58.65	74.75
		[in]	2.1	2.3	2.9
	K1 ₂	[Nm]	217	452	1370
		[in.lb]	1920	4000	12125
	p ₂		3	3	3

Calculation tilting moment caused by the motor **M_{1kMot}**


For NPK, NPSK, NPLK, NPRK, NPTK, CPK, and CPSK

Particularly when the motor is installed in a horizontal mounting position (xx/B5)

Clamping hub diameter	—	mm	11	14	19	28	38
Max. permissible static tilting moment caused by motor	M _{1kMot}	Nm	5.5	7	18	55	130

In horizontal mounting position B5 and symmetrical weight distribution of the motor:

M_{1kMot} = motor weight [kg] · 4,9 · motor length [m]

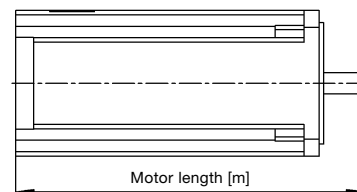

Sizing – Worm gearboxes

The following schematic shows the steps of the sizing of worm gearboxes.
Please use cymex® - www.wittenstein-cymex.com for a detailed sizing.

A: Simplified sizing for servo motors based on the maximum motor torque: $M_{\max} * i \leq T_{2\alpha}$

B: Sizing based on the application

Step 1:

Determine the application data

$T_{2b} = \text{_____ [Nm]}$ $n_{1n} = \text{_____ [rpm]}$


Step 2:

Determine the operating mode factor $K_M = \text{_____}$

Typical applications	Cycle	Torque characteristic	Operating mode factor K_M
Format changing, e.g. in packaging machines, drives for processing equipment, actuators etc.	S5 operation: Low duty cycle Small number of cycles Low dynamics		1.0
Tool changers with low dynamics, pick & place gantry axes, tire building machines etc.	S5 operation: Medium duty cycle Small number of cycles Medium dynamics		1.6
Linear axes in plasma, laser or water jet cutters, portals, tool changers with high dynamics	S5 operation: Medium duty cycle Medium number of cycles High dynamics		1.9
Roller drives in printing presses, star drives in rackers etc.	S1 operation: High duty cycle		2.2
cymex® 5 also allows sizing calculations for other applications / cycles!			

Step 3:

Determine the sizing factor f_a with the operating mode factor K_M $f_a = \text{_____}$

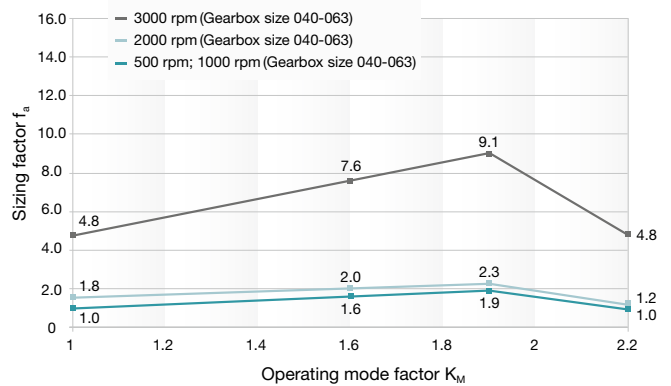

Step 4:

Compare the equivalent application torque with the maximum gearbox $T_{2\alpha}$ (see table, [Step 5](#))

$$T_{2,eq} = f_a * T_{2b} \leq T_{2\alpha}$$

$$T_{2,eq} = \text{_____} * \text{_____} \leq T_{2\alpha}$$

$$T_{2,eq} = \text{_____ [Nm]} \leq \text{_____ [Nm]}$$

We recommend using a vent screw for duty cycles $\geq 60\%$, longer than 20 min (S1 operation) and $n_{1N} \geq 3000$ rpm.

Step 5: Quick selection of the technical data

			V-Drive Basic			V-Drive Value		
			040	050	063	040	050	063
Ratio	i		7-40			4-400		
Max. torque ^{a)} (at $n_1 = 500$ rpm)	T_{2b}	Nm	68-82	116-140	265-301	74-98	150-167	303-365
Max. input speed	n_{1max}	rpm	6000	6000	4500	6000	6000	4500
Max. lateral force	F_{2GMmax}	N	1000 / 2400 ^{b)}	1200 / 3800 ^{b)}	2000 / 6000 ^{b)}	2400	3800	6000
Operating noise	L_{pA}	dB(A)	≤ 54	≤ 62	≤ 64	≤ 54	≤ 62	≤ 64
Max. backlash	j_t	arcmin	≤ 15	≤ 15	≤ 15	≤ 6	≤ 6	≤ 6
Service life	L_n	h	> 15000	> 15000	> 15000	> 20000	> 20000	> 20000

^{a)} The maximum torques depend on the ratio.

^{b)} Refers to center of the output shaft or flange. First value for MF-version (Standard), second value for MT-version (reinforced bearing).


Account must be taken of the lateral and axial forces at the output:

Please also carry out steps 6 and 7 if forces are present at the output (e.g. if timing belt pulleys, pinions or levers are mounted there).

Step 6 (if external forces are present):

Determine the forces acting on the output and check the boundary conditions

Lateral force $F_{2q} = \underline{\hspace{2cm}}$ [N]
 Lateral force distance $x_2 = \underline{\hspace{2cm}}$ [mm]
 Axial force $F_{2a} = \underline{\hspace{2cm}}$ [N]
 Axial force distance $y_2 = \underline{\hspace{2cm}}$ [mm]
 (required if F_{2a} is present)

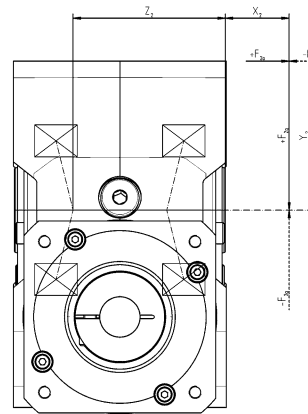

Conditions if axial force F_{2a} is present:

1. $F_{2a} \leq 0.25 * F_{2q} \Rightarrow (\underline{\hspace{2cm}} \leq 0.25 * \underline{\hspace{2cm}})$

☐ Met ☐ Not met: Sizing with cymex® 5

2. $y_2 \leq x_2 \Rightarrow (\underline{\hspace{2cm}} \leq \underline{\hspace{2cm}})$

☐ Met ☐ Not met: Sizing with cymex® 5

Step 7:


Determine the maximum equivalent force acting on the output F_{2eq}

$F_{2eq} = F_{2q} + 0.25 * F_{2a} \leq F_{2QMax}$ (F_{2QMax} can be determined from the diagram below)

$F_{2eq} = \underline{\hspace{2cm}} + 0.25 * \underline{\hspace{2cm}} \leq \underline{\hspace{2cm}}$

$F_{2eq} = \underline{\hspace{2cm}}$ [N] $\leq$ $\underline{\hspace{2cm}}$ [N]

☐ Met ☐ Not met: Sizing with cymex® 5

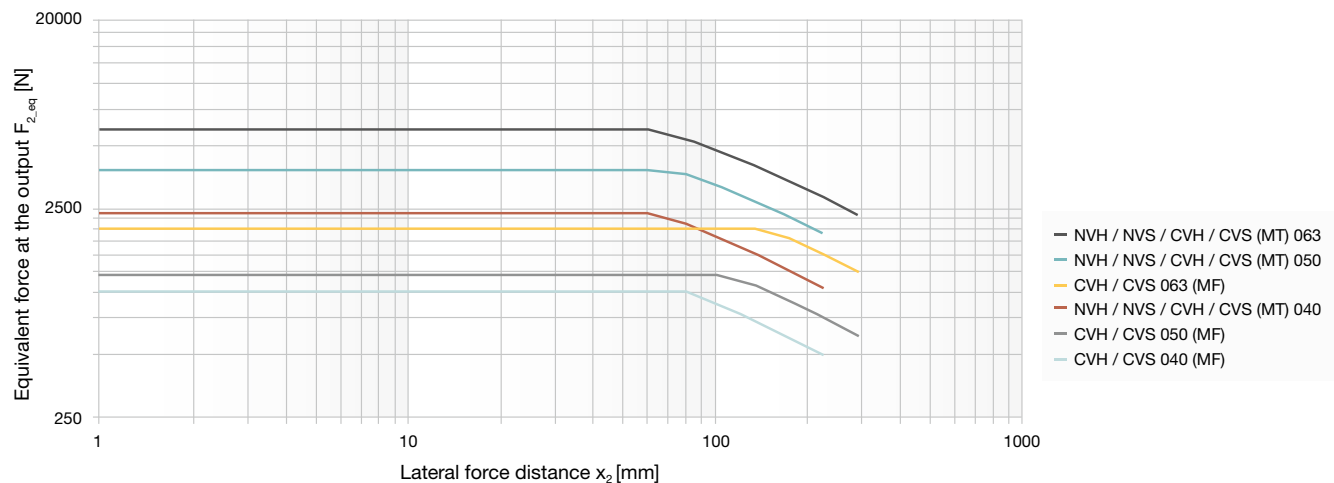

Glossary – the **alphabet**

Acceleration torque (T_{2B})

The acceleration torque T_{2B} is the maximum permissible torque that can briefly be transmitted at the output by the gearhead after $\leq 1000/h$ cycles. For $> 1000/h$ cycles, the **Shock factor** must be taken into account. T_{2B} is the limiting parameter in cyclic operation.

Adapter plate

WITTENSTEIN alpha uses a system of standardized adapter plates to connect the motor and the gearbox, making it possible to mount a WITTENSTEIN alpha gearbox to any desired motor without difficulty.

Angular minute

A degree is subdivided into 60 angular minutes ($= 60 \text{ arcmin} = 60'$).

Example:

If the torsional backlash is $j_t = 1 \text{ arcmin}$, the output can be turned $1/60^\circ$. The repercussions for the application are determined by the arc length:
 $b = 2 \cdot \pi \cdot r \cdot \alpha^\circ / 360^\circ$.


Example:

A pinion with a radius $r = 50 \text{ mm}$ mounted on a gearbox with torsional backlash $j_t = 3 \text{ arcmin}$ can be turned $b = 0.04 \text{ mm}$.

Axial force (F_{2AMax})


The axial force acting on a gearbox runs parallel to its output shaft or perpendicular to its output shaft. It may be applied with axial offset via a lever arm y_2 under certain circumstances, in which case it also generates a bending moment. If the axial force exceeds the permissible catalog values (max. axial force F_{2AMax}), additional design features (e.g. axial bearings) must be implemented to absorb these forces.

Example with output shaft and flange:

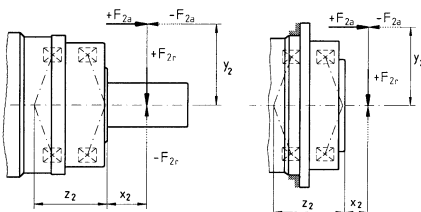

Bushing

If the motor shaft diameter is smaller than the **clamping hub**, a bushing is used to compensate the difference in diameter. The bushing must have a minimum thickness of 1 mm and a motor shaft diameter of 2 mm.

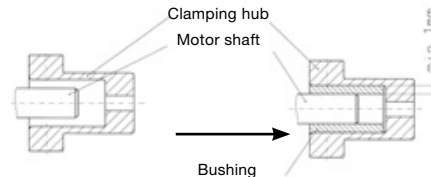

CAD POINT

Performance data, dimension sheets and CAD data for all types of gearbox can be found online in our CAD POINT together with comprehensive documentation of the selection.
www.wittenstein-cad-point.com

Clamping hub

The clamping hub ensures a frictional connection between the motor shaft and gearbox. A **bushing** is used as the connecting element if the motor shaft diameter is smaller than that of the clamping hub. Optionally, a positive connection via a parallel key is also possible.

Continuous operation (S1)

Continuous operation is defined by the **duty cycle**. If the duty cycle is greater than 60 % and / or longer than 20 minutes, this qualifies as continuous operation. **Operating modes**

Cyclic operation (S5)

Cyclic operation is defined via the **duty cycle**. If the duty cycle is less than 60 % and shorter than 20 minutes, it qualifies as cyclic operation (**operating modes**).

cymex®

cymex® is the calculation software developed by our company for dimensioning complete drive trains. The software enables the precise simulation of motion and load variables. The software is available for download from our website (www.wittenstein-cymex.com). We can also provide training to enable you to make full use of all the possibilities provided by the software.

Degree of protection (IP)

The various degrees of protection are defined in DIN EN 60529 "Degrees of protection offered by enclosure (IP code)". The IP degree of protection (International Protection) is represented by two digits. The first digit indicates the protection against the ingress of impurities and the second the protection against the ingress of water.

Example:

IP65

Protection against the ingress of dust (dust-proof)

Protection against spray water

Delivery of speedline®

If necessary, you can receive delivery of standard series in 24 or 48 hours ex works. Outstanding flexibility for fast deliveries at short notice.

Duty cycle (DC)

The cycle determines the duty cycle DC. The times for acceleration (t_a), constant travel if applicable (t_c) and deceleration (t_d) combined yield the duty cycle in minutes. The duty cycle is expressed as a percentage with inclusion of the pause time t_e .


$$DC [\%] = \left[\frac{t_b + t_c + t_d}{t_b + t_c + t_d + t_e} \right] \cdot 100 \frac{\text{Motion duration}}{\text{Cycle duration}}$$

$$DC [\text{min}] = t_b + t_c + t_d$$

Efficiency (η)

Efficiency [%] η is the ratio of output power to input power. Power lost through friction reduces efficiency to less than 1 or 100 %.

$$\eta = P_{\text{off}} / P_{\text{on}} = (P_{\text{on}} - P_{\text{loss}}) / P_{\text{on}}$$

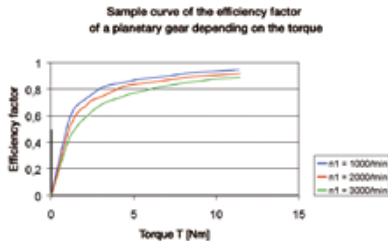

WITTENSTEIN alpha always measures the efficiency of a gearbox during operation at full load. If the input power or torque are lower, the efficiency rating is also lower due to the constant no-load torque. Power losses do not increase as a result. A lower efficiency is also expected at high speeds (see illustration).

Emergency stop torque ($T_{2\text{Not}}$)

The Emergency stop torque $T_{2\text{Not}}$ is the maximum permissible torque at the gearbox output and must not be reached more than 1000 times during the life of the gearbox. It must never be exceeded!

Food-grade lubrication (F)


These products are designed with food-grade lubrication and can therefore be used in the food industry. Note the reduced torques compared to the standard products. (V-Drive excluded). The exact torques can be found in cymex® 5 or CAD POINT.

HIGH TORQUE (MA)

WITTENSTEIN alpha gearboxes are also available in a HIGH TORQUE version. These gearboxes are particularly suited to applications requiring extremely high torques and maximum stiffness.

Hysteresis curve

The hysteresis is measured to determine the torsional rigidity of a gearbox. The result of this measurement is known as the hysteresis curve.

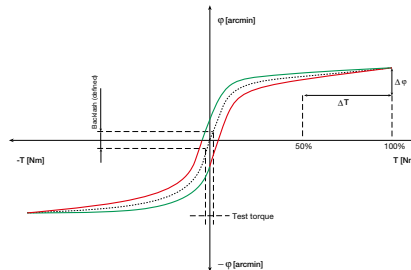

If the input shaft is locked, the gearbox is continuously loaded and relieved at the output in both directions up to a defined torque. The torsional angle is plotted against the torque. This yields a closed curve from which the **→ torsional backlash** and **→ torsional rigidity** can be calculated.

Jerk (j)

Jerk is derived from acceleration and is defined as the change in acceleration within a unit of time. The term impact is used if the acceleration curve changes abruptly and the jerk is infinitely large.

Lateral force ($F_{2\text{QMax}}$)

The max. lateral force $F_{2\text{QMax}}$ [Nm] is the force component acting at right angles to the output shaft or parallel to the output flange. It acts perpendicular to the **→ axial force** and can assume an axial distance of x_2 in relation to the shaft nut or shaft flange, which acts as a lever arm. The lateral force produces a bending moment (see also **→ axial force**).

Gearboxes of the CP series with size 005 and 015 may be used with higher lateral forces if the T_{2B} is reduced according to the tables below.

CP 005	1-stage					2-stage					
Ratio	4	5	7	10	16	20	25	35	50	70	100
T_{2B}	10.5	11.5	11.5	10.5	10.5	10.5	11.5	11.5	11.5	11.5	10.5
F_{2QMax}	200					200					

CP 015	1-stage					2-stage					
Ratio	4	5	7	10	16	20	25	35	50	70	100
T_{2B}	32	32	32	29	32	32	32	32	32	32	29
F_{2QMax}	650					650					

Mass inertia ratio ($\lambda = \text{Lambda}$)

The mass inertia ratio λ is the ratio of external inertia (application side) to internal inertia (motor and gearbox side). It is an important parameter determining the controllability of an application. Accurate control of dynamic processes becomes more difficult with differing mass moments of inertia and as λ becomes greater. WITTENSTEIN alpha recommends that a guideline value of $\lambda < 5$ is maintained. A gearbox reduces the external mass moment of inertia by a factor of $1/i^2$.

$$\lambda = \frac{J'_{\text{extern}}}{J_{\text{intern}}}$$

J reduced externally at input:

$$J'_{\text{external}} = J_{\text{external}} / i^2$$

Simple applications ≤ 10

Dynamic applications ≤ 5

Highly dynamic applications ≤ 1

Mass moment of inertia (J)

The mass moment of inertia J [kg/cm²] is a measurement of the effort applied by an object to maintain its momentary condition (at rest or moving).

Mesh frequency (f_z)

The mesh frequency may cause problems regarding vibrations in an application, especially if the excitation frequency corresponds to a intrinsic frequency of the application. The mesh frequency can be calculated for planetary gearboxes from WITTENSTEIN alpha (exception: gearboxes with ratio $i = 8$) using the formula $f_z = 1.8 \cdot n_2$ [rpm].

Glossary – the alphabet

No-load running torque (T_{012})

The no-load running torque T_{012} is the torque which must be applied to a gearbox in order to overcome the internal friction; it is therefore considered lost torque. The values specified in the catalog are calculated by WITTENSTEIN alpha at a speed of $n_1 = 3000$ rpm and an ambient and gearbox temperature of 20 °C.

T_{012} : 0 1 → 2
without load from input side towards output side

Idling torques decrease during operation.

NSF

Lubricants certified as grade H1 by the NSF (National Sanitation Foundation) can be used in the food sector where occasional unavoidable contact with food cannot be excluded.

Operating modes

(continuous operation **S1** and cyclic operation **S5**)

Gearboxes are selected depending on whether the motion profile is characterized by frequent acceleration and deceleration phases in → **cyclic operation** (S5) as well as pauses, or whether it is designed for → **continuous operation** (S1), i.e. with long phases of constant motion.

Operating noise (L_{PA})

The gear ratio and speed affect the noise level. As a general rule: A higher speed means a higher noise level, while a higher ratio means a lower noise level. The values specified in our catalog are based on a reference ratio and speed. The reference speed is either $n_1 = 3000$ rpm or $n_1 = 2000$ rpm depending on the size of the gearbox. You can find ratio-specific values in cymex® – www.wittenstein-cymex.com.

Output shaft revolution (f_α)

Factor f_α determines the number of cycles for the required gearbox service life. It describes the number of revolutions at the output used to assess the torque permitted at the output.

Positioning accuracy

The positioning accuracy is determined by the angular deviation from a setpoint and equals the sum of the torsional angles due to load → **(torsional rigidity and → torsional backlash)** and kinetics → **(synchronization error)** occurring simultaneously in practise.

Ratio (i)

The gear ratio i indicates the factor by which the gearbox transforms the three relevant parameters of motion (speed, torque and mass moment of inertia). The factor is a result of the geometry of the gearing elements (Example: $i = 10$).


$n_1 = 3000$ rpm $T_2 = 200$ Nm
 $T_1 = 20$ Nm $n_2 = 300$ rpm
 $J_1 = 0,10$ kgm² $J_2 = 10$ kgm² (Application)

Safety note

For applications with special safety requirements (e.g. vertical axes, clamped drives), we recommend exclusive use of our Premium and Advanced products (excluding V-Drive).

Shock factor (f_s)

The maximum permissible acceleration torque during cyclic operation specified in the catalog applies for a cycle rate less than 1000/h. Higher cycle rates can cause vibrations in the drive train. Use the shock factor f_s to include the resulting excess torque values in calculations. The shock factor f_s can be determined with reference to the curve. This calculated value is multiplied by the actual acceleration torque T_{2b} and then compared with the maximum permissible acceleration torque T_{2B} .
($T_{2b} \cdot f_s = T_{2B}$, $f_s < T_{2B}$)

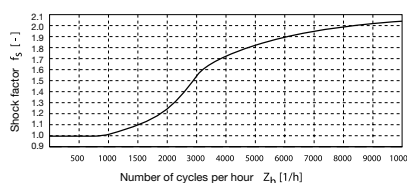


SIZING ASSISTANT

The online SIZING ASSISTANT from WITTENSTEIN alpha allows the efficient selection of a gearbox in seconds. You can use various motor or application entry options to select the right gearbox for your application in seconds (www.sizing-assistant.de).

Speed (n)

Two speeds are of relevance when dimensioning a gearbox: the maximum speed and the thermal speed limit at the input. The maximum permissible speed n_{1Max} must not be exceeded because it serves as the basis for dimensioning → **cyclic operation**. The nominal speed n_{1N} must not be exceeded in → **continuous operation**. The thermal speed limit n_{1T} at an ambient temperature of 20 °C, is determined by the maximum gearbox temperature of $T = 90$ °C at no-load. As can be seen in the diagram below, the temperature limit is reached more quickly in the presence of an elevated outside temperature. In other words: the nominal input speed must be reduced if the ambient temperature is high. The values applicable to your gearbox are available from WITTENSTEIN alpha on request.

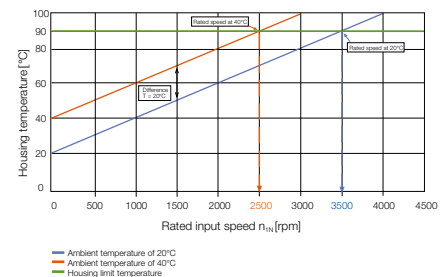

Synchronization

Synchronization refers to the measurable transmission error between the input and output during one revolution of the output shaft.

Technical data

You can download further technical data relating to the entire product portfolio from our website.

Tilting rigidity


The tilting rigidity C_{2K} [Nm/arcmin] of the gearbox consists of the bending stiffness of the output or pinion shaft and the stiffness of the output bearing. It is defined as the quotient of tilting moment M_{2K} [Nm] and tilting angle ϕ [arcmin]
 $(C_{2K} = M_{2K} / \phi)$.

Tilting torque (M_{2K})

The tilting torque M_{2K} is a result of the $\rightarrow$ **axial forces** and $\rightarrow$ **lateral forces** applied and their respective points of application in relation to the inner radial bearing on the output side.

Torsional backlash (j_t)

Torsional backlash j_t [arcmin] is defined as the max. torsional angle of the output shaft at a defined test torque and a blocked input.

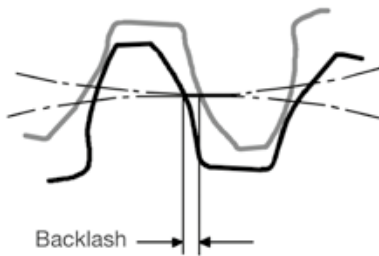


Torsional backlash is measured with the input shaft locked.

The output is then loaded with a defined test torque in order to overcome the internal gearbox friction. The main factor affecting torsional backlash is the face clearance between the gear teeth. The low torsional backlash of WITTENSTEIN alpha gearboxes is due to their high manufacturing accuracy and the specific combination of gear wheels.

Torsional rigidity (C_{t21})

Torsional rigidity [Nm/arcmin] C_{t21} is defined as the quotient of applied torque and resulting torsion angle ($C_{t21} = \Delta T / \Delta \phi$). It shows the torque required to turn the output shaft by one angular minute. The torsional rigidity can be determined from the $\rightarrow$ **hysteresis curve**.

Torsional rigidity C , angle of torsion ϕ

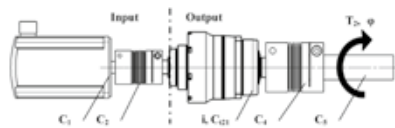

Reduce all torsional rigidity values at the output:

$$C_{(n),out} = C_{(n),in} * i^2$$

with i = Gearbox ratio [-]

$C_{(n)}$ = Individual rigidity values [Nm/arcmin]

Series connection of torsional rigidity values

$$1/C_{tot} = 1/C_{1,out} + 1/C_{2,out} + \dots + 1/C_{(n)}$$

Angle of torsion ϕ [arcmin]

$$\phi = T_2 * 1/C_{tot}$$

with T_2 = output torque [Nm]

Torque (M)

The torque is the actual driving force of a rotary motion. The force and lever arm combine to produce the torque that acts around the axis of rotation. $M = F \cdot l$

Torque ($T_{2\alpha}$)

$T_{2\alpha}$ represents the maximum torque transmitted by the gearbox. This value may decrease depending on the application-specific conditions and the precise evaluation of the movement profile.

Glossary – Formulae

Formulae

Torque [Nm]	$T = J \cdot \alpha$	J = Mass moment of inertia [kgm ²] α = Angular acceleration [1/s ²]
Torque [Nm]	$T = F \cdot l$	F = Force [N] l = Lever, length [m]
Acceleration force [N]	$F_b = m \cdot a$	m = Mass [kg] a = Linear acceleration [m/s ²]
Frictional force [N]	$F_{\text{Reib}} = m \cdot g \cdot \mu$	g = Acceleration due to gravity 9.81 m/s ² μ = Coefficient of friction
Angular speed [1/s]	$\omega = 2 \cdot \pi \cdot n / 60$	n = Speed [U/min] π = PI = 3.14...
Linear speed [m/s]	$v = \omega \cdot r$	r = Radius [m]
Linear speed [m/s] (spindle)	$v_{\text{sp}} = \omega \cdot h / (2 \cdot \pi)$	h = Screw pitch [m]
Linear acceleration [m/s²]	$a = v / t_b$	t_b = Acceleration time [s]
Angular acceleration [1/s²]	$\alpha = \omega / t_b$	
Pinion path [mm]	$s = m_n \cdot z \cdot \pi / \cos \beta$	m_n = Normal module [mm] z = Number of teeth [-] β = Helix angle [°]

Conversion table

1 mm	= 0.039 in
1 Nm	= 8.85 in.lb
1 kgcm²	= 8.85 x 10 ⁻⁴ in.lb.s ²
1 N	= 0.225 lb _f
1 kg	= 2.21 lb _m


Symbol

Symbol	Unit	Designation
C	Nm/arcmin	Stiffness
ED	%, min	Duty cycle
F	N	Force
f_s	–	Load factor
f_e	–	Factor for duty cycle
i	–	Ratio
j	arcmin	Backlash
J	kgm ²	Mass moment of inertia
$K1$	Nm	Factor for bearing calculation
L	h	Service life
L_{PA}	dB(A)	Operating noise
m	kg	Mass
M	Nm	Torque
n	rpm	Speed
p	–	Exponent for bearing calculation
η	%	Efficiency
t	s	Time
T	Nm	Torque
v	m/min	Linear speed
z	1/h	Number of cycles

Index


Index	Designation
Capital letter	Permissible values
Small letter	Actual values
1	Input
2	Output
A/a	Axial
B/b	Acceleration
c	Constant
d	Deceleration
e	Pause
h	Hours
K/k	Tilting
m	Mean
Max/max	Maximum
Mot	Motor
N	Nominal
Not/not	Emergency stop
0	No load
Q/q	Lateral
t	Torsional
T	Tangential

Ordering code – planetary gearboxes

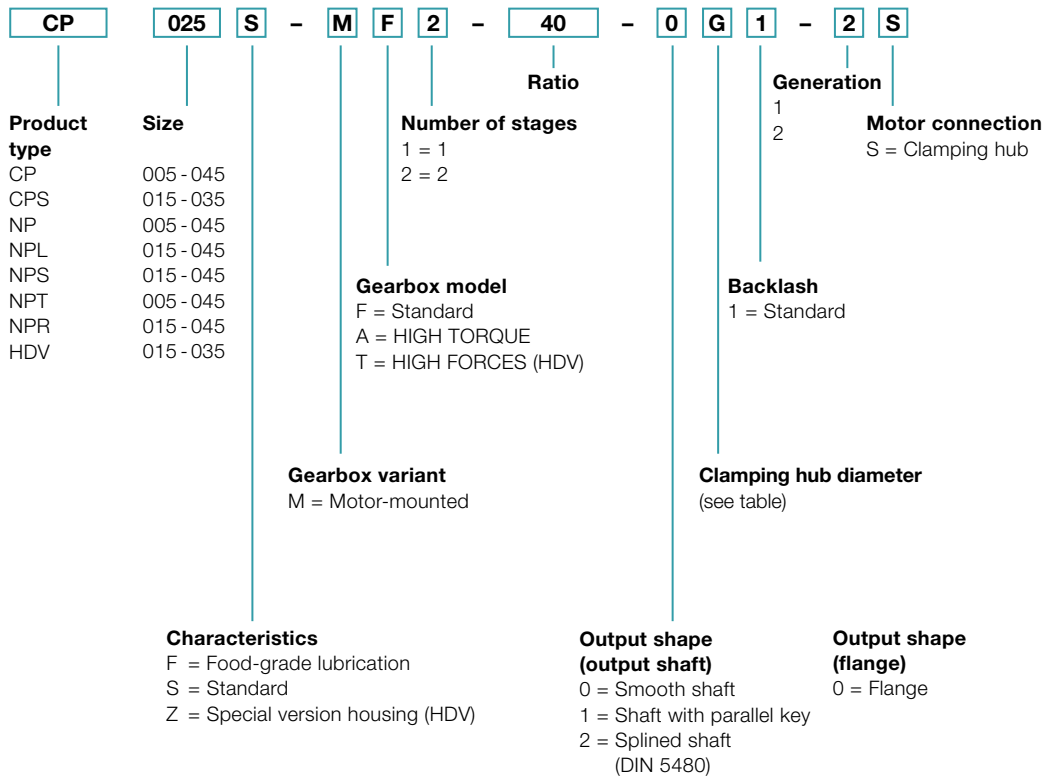

Mounting positions and clamping hub diameters


Clamping hub diameter
(see technical data sheet for possible diameters)

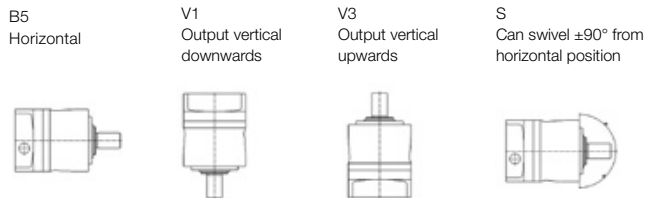

Code letter	mm	Code letter	mm
Z	8	E	19
A	9	G	24
B	11	H	28
C	14	I	32
D	16	K	38


For information purposes only – not required when placing orders!
Please contact WITTENSTEIN alpha for deviating mounting positions.

Ordering code – bevel gearboxes

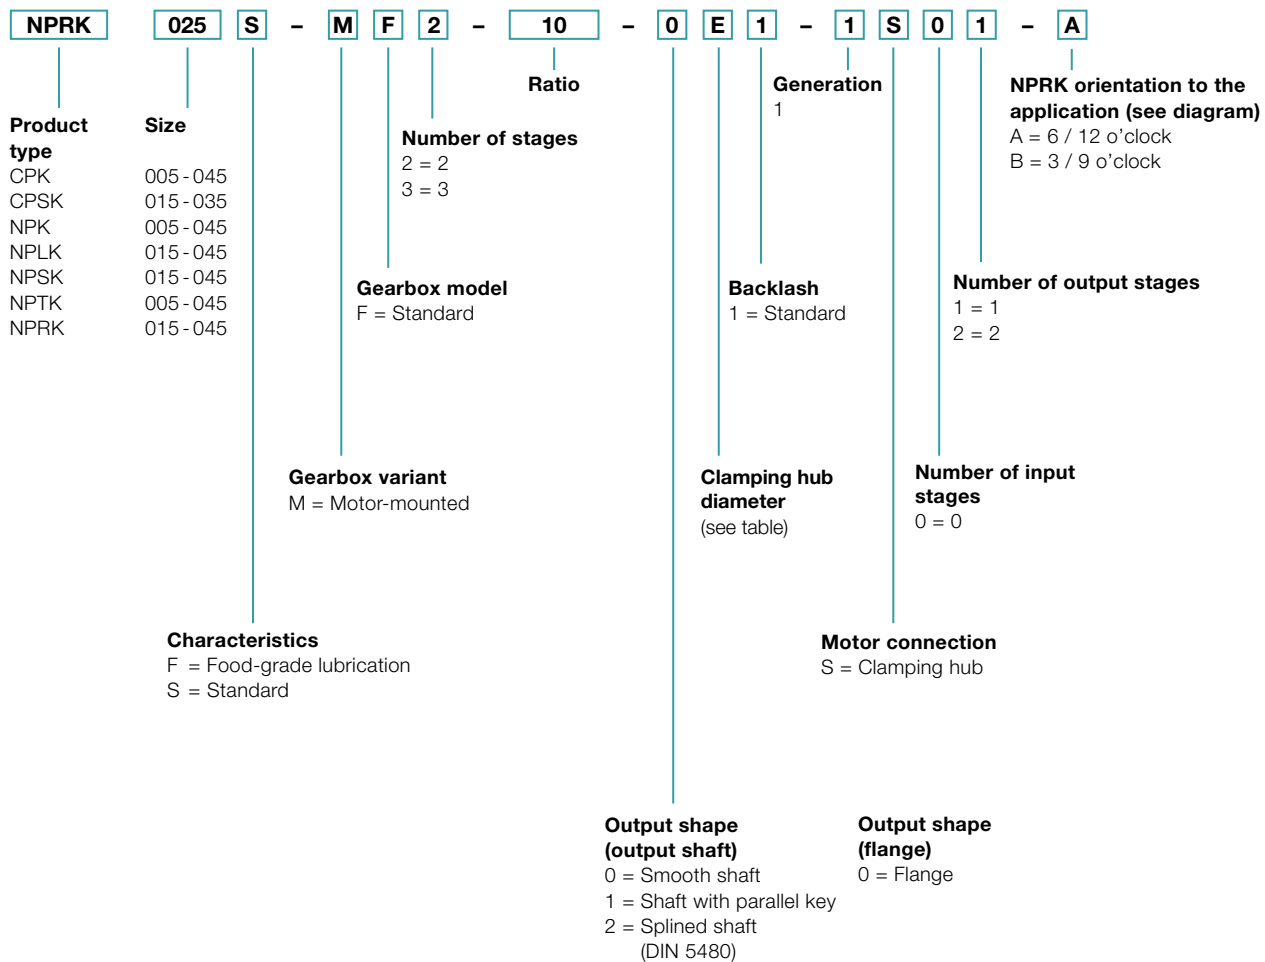


Mounting positions and clamping hub diameters


B5 / V3
Output horizontal /
motor shaft vertical upwards





B5 / V1
Output horizontal /
motor shaft vertical downwards



V1 / B5
Output vertical downwards /
motor shaft horizontal



V3 / B5
Output vertical upwards /
motor shaft horizontal




B5 / B5
Output horizontal /
motor shaft horizontal

Clamping hub diameter
(see technical data sheet for possible diameters)


Code letter	mm
B	11
C	14
E	19
H	28
K	38

Orientation to the application



For information purposes only – not required when placing orders!
Please contact WITTENSTEIN alpha for deviating mounting positions.


Ordering code – worm gearboxes

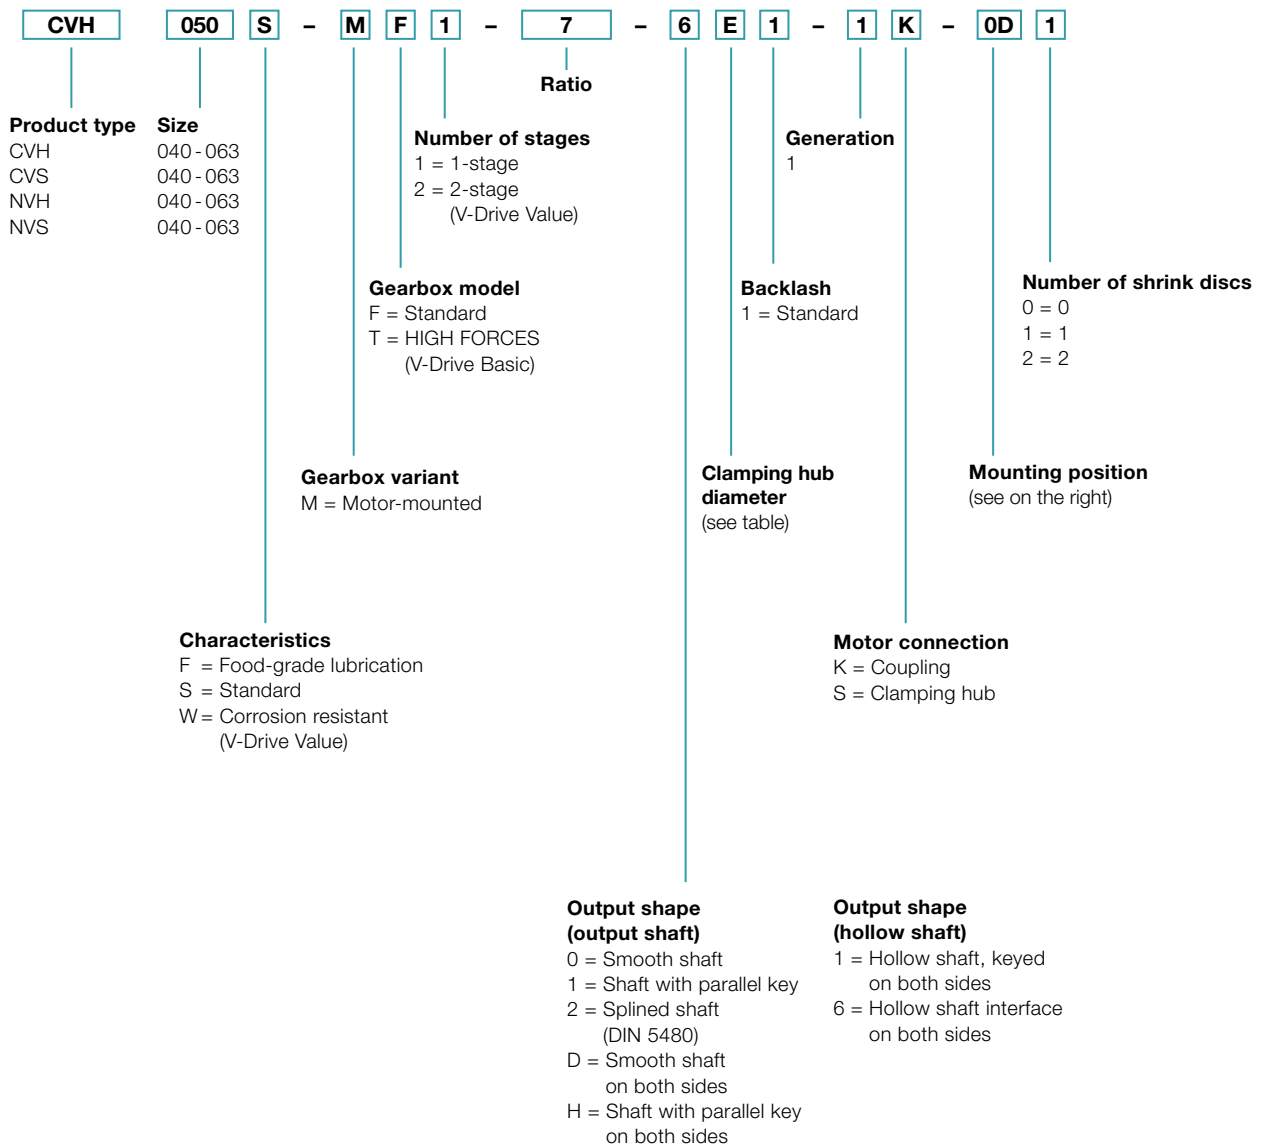

Mounting positions and clamping hub diameters

Mounting position (only relevant for oil volume)

Output side A:
View of the motor connection,
output left
Only valid for CVS, NVS.



AC



AF



AD




AG



AE



Output side B:
View of the motor connection,
output right
Only valid for CVS, NVS.



BC



BF



BD



BG



BE



With output shaft or hollow shaft on both sides, A or B in the mounting position is replaced by a 0 (zero).

Clamping hub diameter

(see technical data sheet for possible diameters)

Code letter	mm
C	14
E	19
G	24
H	28

Intermediate sizes possible using bushings
with a minimum wall thickness of 1 mm.



alpha

WITTENSTEIN Inc. · 1249 Humbracht Circle · Bartlett, IL 60103 · USA · Phone 1-630-540-5300

Subject to technical changes. alpha Basic Line & alpha Value Line

WITTENSTEIN alpha – **Intelligent** drive systems

www.wittenstein-us.com

The entire world of drive technology – Catalogs available on request or online at www.wittenstein-us.com/catalogs



alpha Advanced Line. Maximum power density and outstanding positioning accuracy for complex applications.



alpha Basic Line & alpha Value Line. Reliable, flexible and economical solutions for a wide range of applications.



alpha Linear Systems. Precise, dynamic system solutions for every requirement.



alpha Mechatronic Systems. Energy-efficient, versatile and flexible mechatronic drive systems.